
K 系列 斜齿轮—弧齿锥齿轮减速电机


K Series Helical-Bevel Geared Motors



K..

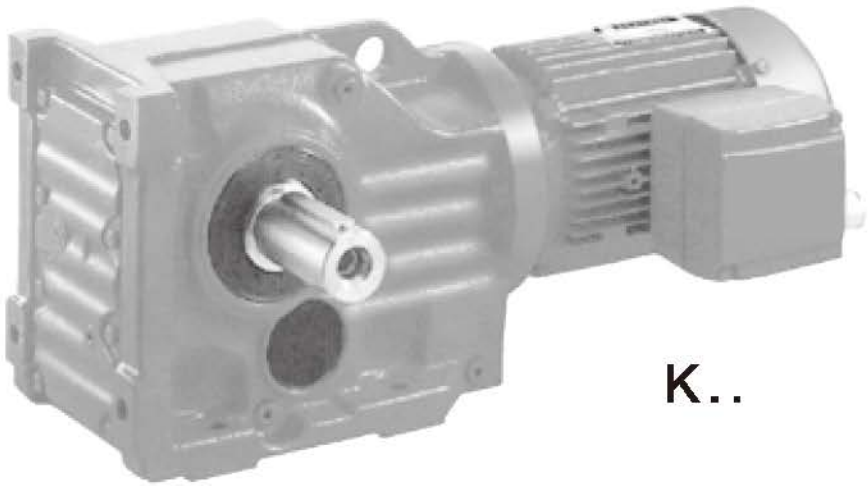

KF..

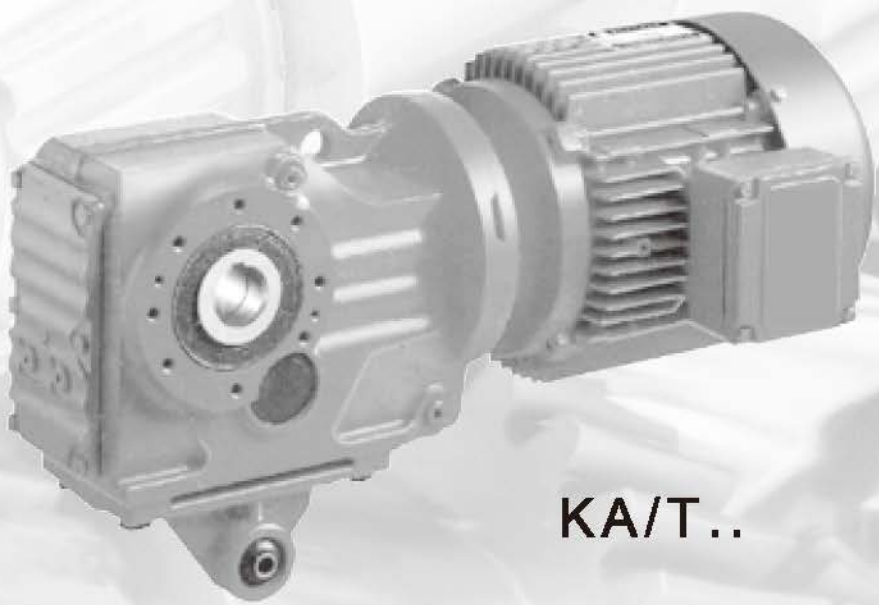

KA/T..


结构型式说明 Dimensional Description

K 系列输出轴垂直于输入轴，由两级斜齿轮和一级弧齿锥齿轮构成。

Output shafts of K series geared motors are vertical to input shafts. Each units consist of two stages helical gears and one stage bevel gears.


1、 K 型：底脚安装，输出轴为实心轴。

Type K: Foot mounted Solid output shaft.




2、 KF 型：B5 法兰安装，输出轴为实心轴。

Type KF: B5 flange mounted Solid output shaft.

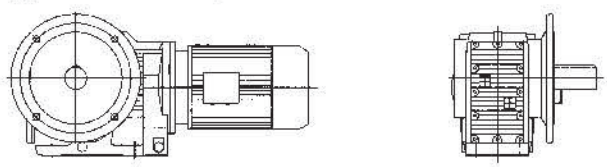


3、 KA 型：轴装式，输出轴为空心轴。

Type KA: Shaft mounted. Hollow output shaft.

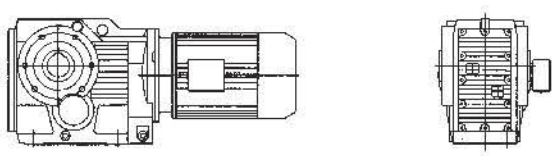


4、 KAF 型：B5 法兰安装，输出轴为空心轴。

Type KAF: B5 flange mounted. Hollow output shaft.

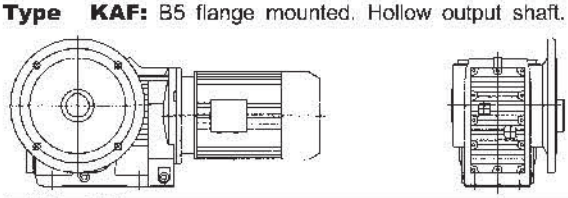


5、 KAB/ KHB 型：用 K 型箱体，输出轴为空心轴。

Type KAB/ KHB: Housings of type K are used. Hollow output shaft.

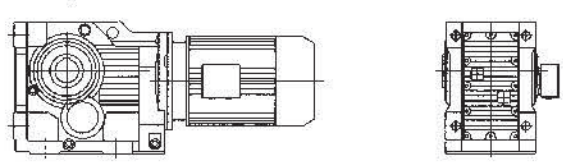


6、 KAZ 型：B14 法兰空心轴安装。

Type KAZ: B14 flange mounted version with hollow shaft.

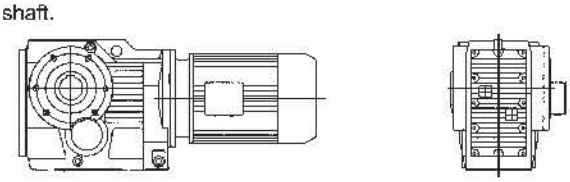


7、 KH 型：空心轴锁紧盘安装。

Type KH: Hollow shaft and shrink disk.

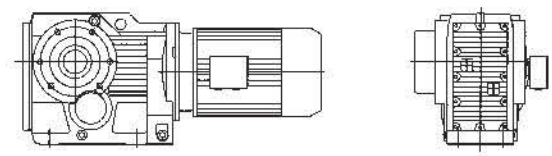


8、 KHF 型：B5 法兰空心轴锁紧盘安装。

Type KHF: B5 flange-mounted version with hollow shaft and shrink disk.

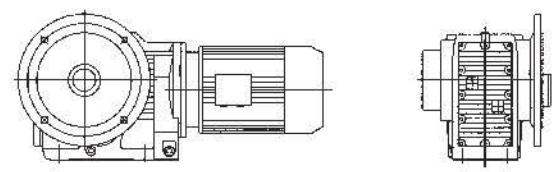


9、 KHZ 型：B14 法兰空心轴锁紧盘安装。

Type KHZ: B14 flange-mounted version with hollow shaft and shrink disk.

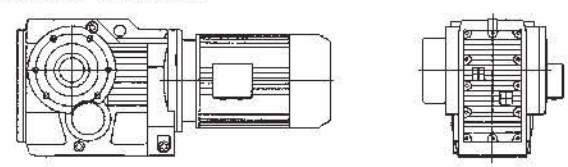


10、 KAT/ KHT 型：即在 KA/ KH 型上增加防转臂等附件后的派生型。

Type KAT/ KHT: As altered type from **type** KA/ KH, this type is added torque arm and other accessories. Basically, accessories except spring washer do not belong to our standard supply.

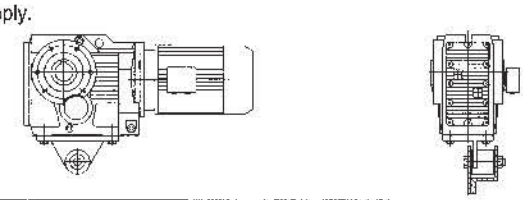


11、 K..SZ..AD..型：输入轴型。

Type K..SZ..AD..: Input shaft types.

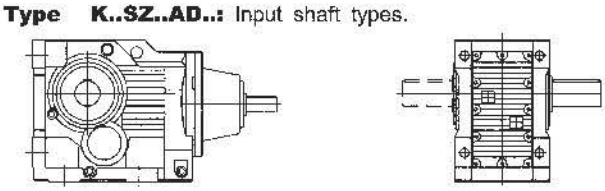

12、 K…R 型： K 系列和 R 系列的组合。

Type K…R: Combined types of type K and type R.

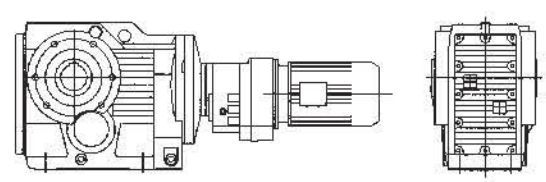

K系列机型号表示方法 Type Expression of GK Series

KAF67—Y0.37—8P—102.62—M4—B—270°—3

- 入线口位置(Position of cable entry)
- 电机接线盒方向(角度)
  (参见电动机接线盒位置表示方法)
  Terminal box position (angle)
  (see description of motor terminal box position)
- 输出轴或输出法兰方向(参见安装形式图例)
  Direction of output flange, or output flange
  (see mounting arrangement description)
- 安装形式(参见安装形式图例)
  Mounting arrangement
  (see mounting dimensional description)
- 传动比(参见选型参数表)
  Ratio (see selection table)
- 电机极数(参见选型参数表)
  Pole number of motor (see selection table)
- 电机系列代号和功率(参见选型参数表)
  Motor type and motor power (see selection table)
- 机型和规格号(参见选型参数表和安装结构尺寸附表)
  Type size (see selection table and Mounting Dimensional Description)

K.

注:1、需带联接法兰时请注明

2、输入轴型没有电动机各项内容。

3、不注明接线盒方向时,则默认为安装形式中的0度位置。不注明入线口位置时,则默认为X位置。

4、对输出轴旋转方向和输入轴旋转方向有特别要求的用户,请与技术部联系,并在订货时用简图或文字说明。

Note: 1、Please make a note, if it needs connecting flange.


2、Contents of motors for input shaft types are not listed.

3、Degree=0°, if terminal box position is not mentioned. It is X, if cable entry position is not mentioned.


4、If specific rotation directions of output shaft or/and input shaft are specially requested, please contact our technology department, and make detailed description while placing order.

电机接线盒位置及入线口位置表示方法
Description of Motor Terminal Box Position and Cable Entry Position

电机接线盒位置及入线口位置表示方法
Description of Motor Terminal Box Position and Cable Entry Position

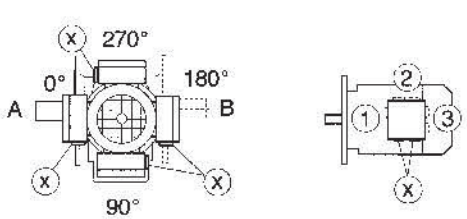

安装形式图例

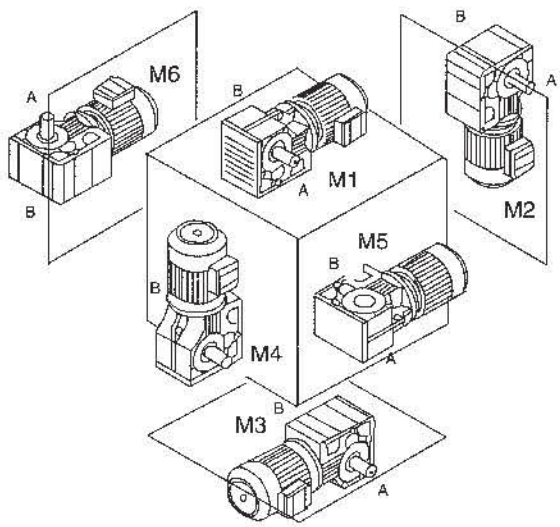

各种安装形式定义为：

M1—电机水平放置；减速机底脚朝下。

M2—电机居下。


M3—电机水平放置；减速机底脚朝上。

M4—电机居上。

M5—电机水平放置；当减速机在 M1 安装位置时，从电机方向看，减速机的左面旋转到下方位置。

M6—电机水平放置；当减速机在 M1 安装位置时，从电机方向看，减速机的左面旋转到上方位置。

Mounting Arrangements Description

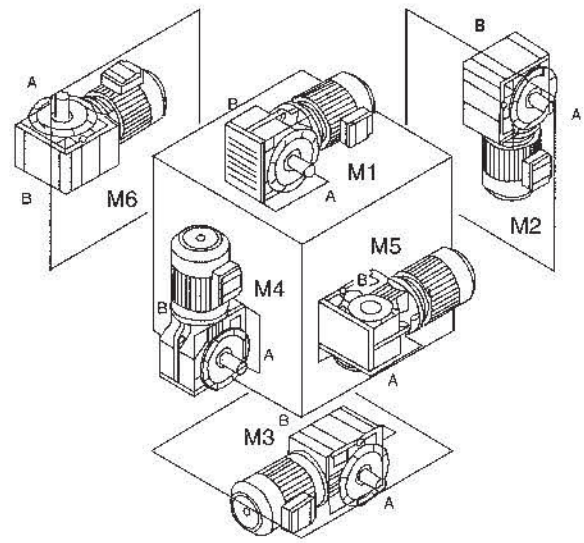

Different kinds of mounting arrangements are defined as following:

M1—horizontally mounted motor, unit base is at bottom.

M2—motor is vertically mounted downwards.

M3—horizontally mounted motor, unit base is top.

M4—motor is vertically mounted upwards.

M5—horizontally mounted motor, if placed on M1 position, left side of unit turns to bottom (view point: towards from motor side).

M6—horizontally mounted motor, if placed on M1 position, left side of unit turns to top (view point: towards from motor side).

减速机重量 (Gear unit weight)

规格 Size	K37	K47	K57	K67	K77	K87	K97	K107	K127	K157	K167	K187
重量(kg) Weight	14	21	28	32	54	93	153	270	403	630	1122	1630

注：重量为平均值，不包括电机，仅供参考。

(Note: The weights mean values, without the motor, only for reference.)

选型表注释 (Description of selection table)

恒功率 Constant power

n_a [r/min]	M_a [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole

输出转速 Output speed

减速机速比 Gear unit ratio

使用系数 Service factor

输出转矩 Output torque

许用径向载荷 Permissible radial load

恒转矩 Constant torque

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P

最大输出转矩 Max. output torque

减速机速比 Gear unit ratio

输出转速 Output speed

许用径向载荷 Permissible radial load

电机功率 Motor power

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.12kW						
0.08	13734	17396	76	1.00		
0.08	12521	15859	76	1.10		
0.09	11719	14843	77	1.20	**K127R77**	
0.11	9736	12331	77	1.40	**KF127R77**	**4P**
0.12	8542	10819	78	1.60	**KA127R77**	
0.13	7738	9801	78	1.80	**KAF127R77**	
0.16	6605	8366	78	2.10		
0.18	5786	7329	78	2.40		
0.09	11299	14311	62	0.80		
0.11	9641	12211	62	0.90		
0.12	8430	10678	62	1.00		
0.14	7519	9524	62	1.15	**K107R77**	
0.16	6575	8328	62	1.30	**KF107R77**	**4P**
0.18	5739	7269	62	1.45	**KA107R77**	
0.21	4882	6184	62	1.75	**KAF107R77**	
0.23	4470	5662	62	1.90		
0.25	4057	5138	62	2.10		
0.30	3442	4360	62	2.50		
0.16	6360	8055	38	0.80		
0.19	5502	6969	38	0.85		
0.22	4758	6027	38	0.95	**K97R57**	
0.24	4257	5392	38	1.05	**KF97R57**	
0.28	3686	4669	38	1.25	**KA97R57**	**4P**
0.32	3222	4081	38	1.40	**KAF97R57**	
0.37	2829	3583	38	1.60		
0.42	2454	3108	38	1.85		
0.48	2176	2756	38	2.10		
0.54	1910	2419	38	2.50		
0.62	1676	2123	38	2.70	**K97R57**	
0.71	1465	1856	38	3.10	**KF97R57**	
0.81	1283	1625	38	3.55	**KA97R57**	**4P**
0.92	1129	1430	38	4.05	**KAF97R57**	
1.04	996	1261	38	4.60		
1.19	870	1102	38	5.25		
0.25	4136	5239	25	0.80		
0.29	3602	4562	26	0.80	**K87R57**	
0.32	3187	4037	26	0.90	**KF87R57**	
0.36	2849	3609	26	1.00	**KA87R57**	**4P**
0.42	2452	3106	27	1.15	**KAF87R57**	
0.48	2154	2728	27	1.35		
0.55	1872	2371	27	1.55		
0.63	1647	2086	27	1.75		
0.71	1464	1854	27	1.95		
0.79	1309	1658	27	2.20	**K87R57**	
0.93	1117	1415	27	2.55	**KF87R57**	
1.07	970	1229	27	2.95	**KA87R57**	**4P**
1.22	851	1078	27	3.35	**KAF87R57**	
1.38	751	951	28	3.80		
1.57	661	837	28	4.35		
1.80	573	726	28	5.00		
0.48	2148	2721	13	0.80	**K77R37** **KF77R37**	**4P**
0.55	1874	2374	15	0.90	**KA77R37** **KAF77R37**	
0.64	1621	2053	16	1.00		
0.74	1401	1775	17	1.15	**K77R37**	
0.86	1197	1516	17	1.35	**KF77R37**	**4P**
0.94	1097	1390	18	1.50	**KA77R37**	
1.07	963	1220	18	1.70	**KAF77R37**	
1.24	833	1055	18	1.95		
1.42	730	925	19	2.25	**K77R37**	
1.60	645	817	19	2.55	**KF77R37**	**4P**
1.85	561	710	19	2.95	**KA77R37**	
2.10	492	623	19	3.35	**KAF77R37**	
0.97	1067	1351	8.8	0.80		
1.1	925	1171	10	0.95		
1.3	816	1034	11	1.05		
1.5	713	903	11	1.20		
1.7	626	793	12	1.40		
1.9	550	697	12	1.60	**K67R37**	
2.1	484	613	12	1.80	**KF67R37**	
2.4	428	542	12	2.05	**KA67R37**	**4P**
2.8	372	471	12	2.35	**KAF67R37**	
3.1	332	420	12	2.60		
3.6	285	361	12	3.05		
4.1	255	323	12	3.40		
4.7	220	279	12	3.95		
5.3	194	246	12	4.50		
6.0	171	217	12	5.10		
1.4	715	906	7.4	0.90		
1.6	636	806	7.8	1.00		
1.9	552	699	8.3	1.15		
2.1	486	615	8.5	1.30		
2.4	429	544	8.7	1.50		
2.8	373	473	8.8	1.70	**K57R37**	
3.1	332	421	8.9	1.90	**KF57R37**	**4P**
3.6	286	362	9.0	2.25	**KA57R37**	
4.1	252	319	9.1	2.55	**KAF57R37**	
4.7	221	280	9.2	2.90		
5.3	194	246	9.3	3.30		
6.1	170	215	9.3	3.75		
6.8	152	192	9.4	4.20		
2.1	505	639	2.4	0.85		
2.4	436	552	6.0	0.95	**K47R37**	
2.6	391	495	6.6	1.10	**KF47R37**	
3.1	336	426	6.9	1.25	**KA47R37**	**4P**
3.5	296	375	7.2	1.45	**KAF47R37**	
4.0	257	326	7.3	1.65		
4.5	228	289	7.4	1.85		
3.8	273	346	4.6	0.80		
4.3	240	304	5.4	0.90		
4.9	211	267	5.5	1.00	**K37R17**	
5.6	185	234	5.8	1.15	**KF37R17**	**4P**
6.4	162	205	5.9	1.30	**KA37R17**	
7.2	143	181	6.0	1.50	**KAF37R17**	
8.2	126	160	6.1	1.70		
9.6	107	136	6.2	2.00		
5.9	185	144.79	12	4.40	**K67** **KF67** **KA67** **KAF67**	**6P***
5.9	186	145.15	9.2	3.20		
6.9	159	123.85	9.3	3.80	**K57**	
7.8	139	108.29	9.3	4.30	**KF57**	**6P***
8.3	132	102.88	9.3	4.60	**KA57**	
9.4	116	90.26	9.4	5.20	**KAF57**	
11	98	76.56	9.4	6.20		

*0.12kW(6 极)电机需特制。 *0.12kW motor of 6 poles needs to be specially requested and then manufactured.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.12kW						
9	121	145.15	9.4	5.00		
11	103	123.85	9.4	5.80	**K57**	
12	90	108.29	9.5	6.70	**KF57**	**4P**
13	86	102.88	9.5	7.00	**KA57**	
15	75	90.26	9.5	8.00	**KAF57**	
6.4	169	131.87	7.5	2.40	**K47**	
7.0	156	121.48	7.6	2.60	**KF47**	**6P***
8.1	134	104.37	7.7	3.00	**KA47**	
					KAF47	
9.9	110	131.87	7.7	3.70	**K47**	
					KF47	**4P**
11	101	121.48	7.8	4.00	**KA47**	
					KAF47	
8.0	136	106.38	5.9	1.50	**K37**	
8.7	125	97.81	6.0	1.60	**KF37**	**6P***
10	107	83.69	6.1	1.90	**KA37**	
12	93	72.54	6.2	2.20	**KAF37**	
12	88	106.38	6.2	2.30		
13	81	97.81	6.2	2.50		
16	70	83.69	6.2	2.90		
18	60	72.54	6.3	3.30		
19	56	67.80	6.3	3.50		
22	49	58.61	6.1	4.10		
26	41	49.79	5.8	4.80		
29	37	44.46	5.6	5.40		
35	32	37.97	5.4	6.30	**K37**	
37	30	35.57	5.3	6.80	**KF37**	**4P**
44	25	29.96	5.0	8.00	**KA37**	
45	24	28.83	4.9	8.40	**KAF37**	
53	21	24.88	4.7	9.60		
56	19	23.36	4.6	10		
65	17	20.19	4.4	11		
76	14	17.15	4.2	13		
86	13	15.32	4.1	14		
100	11	13.08	3.9	15		
108	10	12.14	3.8	16		
0.18kW						
0.09	17578	14843	70	0.80		
0.11	14603	12331	75	0.95		
0.12	12813	10819	76	1.10		
0.13	11607	9801	76	1.20		
0.16	9908	8366	77	1.40	**K127R77**	
0.18	8680	7329	77	1.60	**KF127R77**	**4P**
0.20	7615	6430	78	1.80	**KA127R77**	
0.23	6860	5793	78	2.00	**KAF127R77**	
0.27	5831	4924	78	2.35		
0.30	5130	4332	78	2.70		
0.34	4564	3854	78	3.00		
0.40	3887	3282	78	3.55		
0.16	9863	8328	62	0.85		
0.18	8608	7269	62	1.00		
0.21	7324	6184	62	1.15		
0.23	6705	5662	62	1.25	**K107R77**	
0.25	6085	5138	62	1.40	**KF107R77**	
0.30	5163	4360	62	1.65	**KA107R77**	**4P**
0.34	4513	3811	62	1.90	**KAF107R77**	
0.39	3977	3358	62	2.15		
0.44	3526	2977	62	2.40		
0.50	3077	2598	62	2.75		
0.57	2707	2286	62	3.15		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.18kW						
0.28	5529	4669	38	0.85		
0.32	4833	4081	38	0.95	**K97R57**	
0.37	4243	3583	38	1.10	**KF97R57**	**4P**
0.42	3681	3108	38	1.25	**KA97R57**	
0.48	3264	2756	38	1.40	**KAF97R57**	
0.54	2865	2419	38	1.60		
0.62	2514	2123	38	1.80		
0.71	2198	1856	38	2.10		
0.81	1924	1625	38	2.35		
0.92	1694	1430	38	2.70	**K97R57**	
1.04	1493	1261	38	3.05	**KF97R57**	**4P**
1.19	1305	1102	38	3.50	**KA97R57**	
1.37	1133	957	38	4.05	**KAF97R57**	
1.53	1013	855	38	4.50		
1.76	880	743	38	5.20		
2.01	771	651	38	5.90		
					K87R57	
0.42	3678	3106	25	0.80	**KF87R57**	**4P**
0.48	3231	2728	26	0.90	**KA87R57**	
0.55	2808	2371	26	1.00	**KAF87R57**	
0.63	2470	2086	26	1.15		
0.71	2196	1854	27	1.30		
0.79	1964	1658	27	1.45		
0.93	1676	1415	27	1.70	**K87R57**	
1.1	1455	1229	27	1.95	**KF87R57**	**4P**
1.2	1277	1078	27	2.25	**KA87R57**	
1.4	1126	951	27	2.55	**KAF87R57**	
1.6	991	837	27	2.90		
1.8	860	726	27	3.35		
0.86	1795	1516	14	0.90		
0.94	1646	1390	15	1.00		
1.1	1445	1220	16	1.15		
1.2	1248	1054	17	1.30		
1.4	1095	925	17	1.50	**K77R37**	
1.6	968	817	18	1.70	**KF77R37**	**4P**
1.8	841	710	18	1.95	**KA77R37**	
2.1	738	623	18	2.25	**KAF77R37**	
2.4	655	553	19	2.50		
2.7	574	485	19	2.85		
3.1	507	428	19	3.25		
3.6	436	368	19	3.75		
1.5	1069	903	5.4	0.80		
1.7	939	793	9.1	0.95		
1.9	825	697	10	1.05		
2.1	726	613	11	1.20	**K67R37**	
2.4	642	542	11	1.35	**KF67R37**	**4P**
2.8	558	471	12	1.55	**KA67R37**	
3.1	497	420	12	1.75	**KAF67R37**	
3.6	428	361	12	2.05		
4.1	383	323	12	2.25		
4.7	330	279	12	2.65		
2.1	728	615	5.3	0.90		
2.4	644	544	7.4	1.00	**K57R37**	
2.8	560	473	7.9	1.15	**KF57R37**	
3.1	499	421	8.2	1.30	**KA57R37**	**4P**
3.6	429	362	8.5	1.50	**KAF57R37**	
4.1	378	319	8.6	1.70		
4.7	332	280	8.8	1.90		

*0.12kW(6 极)电机需特制。*0.12kW motor of 6 poles needs to be specially requested and then manufactured.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.18kW						
5.3	291	246	8.9	2.20	**K57R37**	
6.1	255	215	9.1	2.50	**KF57R37**	**4P**
6.8	227	192	9.1	2.80	**KA57R37**	
7.9	197	166	9.2	3.25	**KAF57R37**	
3.5	444	375	5.6	0.95		
4.0	386	326	6.1	1.10		
4.5	342	289	6.6	1.25	**K47R37**	
5.1	303	256	6.9	1.40	**KF47R37**	
5.8	266	225	7.1	1.60	**KA47R37**	**4P**
6.6	234	198	7.3	1.80	**KAF47R37**	
7.7	203	171	7.5	2.10		
8.6	181	153	7.6	2.35		
10	155	131	7.6	2.75		
6.4	243	205	5.0	0.85		
7.2	214	181	5.4	1.00	**K37R17**	
8.2	189	160	5.6	1.10	**KF37R17**	**4P**
9.6	161	136	5.8	1.30	**KA37R17**	
10	150	127	5.9	1.40	**KAF37R17**	
9.0	171	144.79	12	2.90	**K67**	
11	146	123.54	12	3.40	**KF67**	**6P**
12	128	108.02	12	3.80	**KA67**	
13	122	102.62	12	4.00	**KAF67**	
					K67	
9.0	180	144.79	12	4.30	**KF67**	**4P**
11	154	123.54	12	5.10	**KA67**	
12	135	108.02	12	5.80	**KAF67**	
5.9	279	145.15	8.9	2.10	**K57**	
6.9	238	123.85	9.0	2.50	**KF57**	
7.8	208	108.29	9.1	2.80	**KA57**	**6P**
8.3	198	102.88	9.1	3.00	**KAF57**	
9.4	173	90.26	9.2	3.40		
9.0	181	145.15	9.2	3.20		
11	154	123.85	9.3	3.70	**K57**	
12	135	108.29	9.3	4.30	**KF57**	**4P**
13	128	102.88	9.3	4.50	**KA57**	
15	113	90.26	9.4	5.10	**KAF57**	
17	95	76.56	9.4	6.00		
6.4	253	131.87	7.0	1.55		
7.0	233	121.48	7.2	1.65	**K47**	
8.1	201	104.37	7.4	1.95	**KF47**	**6P**
9.4	175	90.86	7.5	2.20	**KA47**	
10	164	85.12	7.5	2.40	**KAF47**	
10	164	131.87	7.5	2.30		
11	151	121.48	7.6	2.50	**K47**	
13	130	104.37	7.7	2.90	**KF47**	**4P**
14	113	90.86	7.7	3.40	**KA47**	
15	106	85.12	7.7	3.60	**KAF47**	
8.0	204	106.38	5.2	0.95	**K37**	
8.7	188	97.81	5.4	1.05	**KF37**	**6P**
10	161	83.69	5.7	1.20	**KA37**	
12	139	72.54	5.9	1.40	**KAF37**	
12	133	106.38	5.9	1.45		
13	122	97.81	6.0	1.55		
16	104	83.69	6.1	1.85		
18	90	72.54	6.1	2.10	**K37**	
19	85	67.80	6.2	2.30	**KF37**	**4P**
22	73	58.61	6.0	2.60	**KA37**	
26	62	49.79	5.7	3.10	**KAF37**	
29	55	44.46	5.5	3.50		
35	47	37.97	5.3	4.10		
37	44	35.57	5.2	4.30		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.18kW						
44	37	29.96	5.0	5.10		
45	36	28.83	4.9	5.30		
52	31	24.99	4.7	6.20		
56	29	23.36	4.6	6.40		
65	25	20.19	4.4	7.00	**K37**	
76	21	17.15	4.2	8.10	**KF37**	**4P**
86	19	15.32	4.1	8.80	**KA37**	
100	16	13.08	3.9	9.70	**KAF37**	
108	15	12.14	3.8	10		
125	13	10.49	3.6	12		
147	11	8.91	3.4	14		
165	9.9	7.96	3.3	15		
0.25kW						
0.14	16121	9801	72	0.85		
0.16	13761	8366	75	1.00		
0.18	12055	7329	76	1.15		
0.21	10576	6430	77	1.30	**K127R77**	
0.23	9528	5793	77	1.45	**KF127R77**	**4P**
0.27	8099	4924	78	1.70	**KA127R77**	
0.31	7125	4332	78	1.95	**KAF127R77**	
0.35	6339	3854	78	2.20		
0.41	5398	3282	78	2.55		
0.22	10019	6184	62	0.85		
0.23	9173	5662	62	0.90		
0.26	8324	5138	62	1.00		
0.31	7064	4360	62	1.20	**K107R77**	
0.35	6174	3811	62	1.35	**KF107R77**	**4P**
0.40	5440	3358	62	1.55	**KA107R77**	
0.45	4823	2977	62	1.75	**KAF107R77**	
0.51	4209	2598	62	2.00		
0.58	3704	2286	62	2.25		
0.69	3141	1939	62	2.65		
					K107R77	
0.78	2775	1713	62	3.00	**KF107R77**	**4P**
0.86	2519	1555	62	3.30	**KA107R77**	
1.0	2164	1336	62	3.85	**KAF107R77**	
0.42	5152	3180	38	0.85	**K97R57** **KF97R57**	**4P**
0.48	4465	2756	38	1.00	**KA97R57** **KAF97R57**	
0.55	3919	2419	38	1.15		
0.63	3439	2123	38	1.30		
0.72	3007	1856	38	1.50		
0.82	2633	1625	38	1.70	**K97R57**	
0.93	2317	1430	38	1.95	**KF97R57**	**4P**
1.1	2043	1261	38	2.20	**KA97R57**	
1.2	1785	1102	38	2.50	**KAF97R57**	
1.4	1550	957	38	2.90		
1.6	1385	855	38	3.25		
0.64	3380	2086	25	0.85		
0.72	3004	1854	26	0.95		
0.80	2686	1658	26	1.05		
0.94	2292	1415	26	1.25	**K87R57**	
1.1	1991	1229	27	1.40	**KF87R57**	**4P**
1.2	1746	1078	27	1.60	**KA87R57**	
1.4	1541	951	27	1.85	**KAF87R57**	
1.6	1356	837	27	2.10		
1.8	1176	726	27	2.40		
2.1	1034	638	27	2.75		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.25kW						
1.3	1708	1054	14	0.95		
1.4	1499	925	15	1.10		
1.6	1324	817	16	1.20		
1.9	1150	710	17	1.40		
2.1	1009	623	17	1.60		
2.4	896	553	18	1.80		
2.7	786	485	18	2.05	**K77R37**	
3.1	693	428	18	2.35	**KF77R37**	**4P**
3.6	596	368	19	2.70	**KA77R37**	
4.1	531	328	19	3.05	**KAF77R37**	
4.6	471	291	19	3.45		
5.3	408	252	19	3.95		
6.0	358	221	19	4.50		
6.8	316	195	19	5.15		
7.6	284	175	19	5.70		
2.2	993	613	7.0	0.85		
2.5	878	542	10	1.00		
2.8	763	471	10	1.10		
3.2	680	420	11	1.25	**K67R37**	
3.7	585	361	11	1.45	**KF67R37**	**4P**
4.1	523	323	12	1.65	**KA67R37**	
4.8	452	279	12	1.90	**KAF67R37**	
5.4	399	246	12	2.15		
6.1	352	217	12	2.45		
3.2	682	421	5.5	0.90		
3.7	586	362	7.4	1.05		
4.2	517	319	8.0	1.20		
4.8	454	280	8.3	1.40		
5.4	399	246	8.5	1.55	**K57R37**	
6.2	348	215	8.7	1.80	**KF57R37**	**4P**
6.9	311	192	8.8	2.00	**KA57R37**	
8.0	269	166	9.0	2.35	**KAF57R37**	
9.2	235	145	9.1	2.65		
10	209	129	9.1	3.00		
12	180	111	9.2	3.50		
14	157	97	9.3	4.00		
4.1	547	154.28	19	2.90	**K77**	
4.7	480	135.51	19	3.30	**KF77**	**8P**
5.0	456	128.73	19	3.40	**KA77**	
5.6	403	113.75	19	3.90	**KAF77**	
4.4	514	192.50	19	2.80	**K77**	
4.7	479	179.67	19	3.00	**KF77**	**6P**
5.5	412	154.28	19	3.70	**KA77**	
6.3	362	135.51	19	4.20	**KAF77**	
5.2	438	123.54	12	1.90	**K67**	
5.9	383	108.02	12	2.20	**KF67**	**8P**
6.2	364	102.62	12	2.30	**KA67**	
7.1	319	90.04	12	2.60	**KAF67**	
5.9	386	144.79	12	2.10	**K67**	
6.9	330	123.54	12	2.50	**KF67**	**6P**
7.9	288	108.02	12	2.80	**KA67**	
8.3	274	102.62	12	3.00	**KAF67**	
9.2	247	144.79	12	3.10	**K67**	
11	211	123.54	12	3.60	**KF67**	**4P**
12	184	108.02	12	4.10	**KA67**	
13	175	102.62	12	4.30	**KAF67**	
5.9	387	145.15	8.5	1.50		
6.9	330	123.85	8.7	1.80	**K57**	
7.8	289	108.29	8.8	2.00	**KF57**	**6P**
8.3	275	102.88	8.9	2.20	**KA57**	
9.4	241	90.26	9.0	2.50	**KAF57**	
11	204	76.56	9.1	2.90		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.25kW						
9.2	248	145.15	8.9	2.20		
11	211	123.85	9.1	2.60	**K57**	
12	185	108.29	9.2	3.00	**KF57**	**4P**
13	175	102.88	9.2	3.20	**KA57**	
15	154	90.26	9.3	3.60	**KAF57**	
17	131	76.56	9.3	4.30		
6.4	352	131.87	6.1	1.10		
7.0	324	121.48	6.4	1.20	**K47**	
8.1	278	104.37	6.8	1.40	**KF47**	**6P**
9.4	242	90.86	7.1	1.60	**KA47**	
10	227	85.12	7.2	1.75	**KAF47**	
10	225	131.87	7.1	1.65		
11	207	121.48	7.3	1.80	**K47**	
13	178	104.37	7.4	2.10	**KF47**	**4P**
15	155	90.86	7.5	2.40	**KA47**	
16	145	85.12	7.6	2.60	**KAF47**	
10	223	83.69	5.0	0.90		
12	194	72.54	5.4	1.00	**K37**	
13	181	67.80	5.5	1.10	**KF37**	**6P**
15	156	58.61	5.7	1.25	**KA37**	
17	133	49.79	5.9	1.50	**KAF37**	
13	181	106.38	5.4	1.00		
14	167	97.81	5.6	1.10		
16	143	83.69	5.8	1.30		
18	124	72.54	5.9	1.50		
20	116	67.80	5.9	1.60		
23	100	58.61	5.7	1.85		
27	85	49.79	5.5	2.20		
30	76	44.46	5.4	2.50		
35	65	37.97	5.2	2.90		
37	61	35.57	5.1	3.10		
44	51	29.96	4.8	3.60	**K37**	
46	49	28.83	4.8	3.80	**KF37**	**4P**
53	43	24.99	4.6	4.40	**KA37**	
57	40	23.36	4.5	4.60	**KAF37**	
66	34	20.19	4.4	5.00		
78	29	17.15	4.2	5.70		
87	26	15.31	4.0	6.20		
102	22	13.08	3.8	6.90		
110	21	12.14	3.7	7.20		
127	18	10.49	3.6	8.30		
149	15	8.91	3.4	9.80		
167	14	7.96	3.3	11.00		
196	12	6.80	3.1	12.00		
209	11	6.37	3.1	12.00		
0.37kW						
0.18	17573	7329	69	0.75		
0.21	15417	6430	73	0.90	**K127R77**	
0.23	13890	5793	75	1.00	**KF127R77**	
0.27	11806	4924	76	1.15	**KA127R77**	**4P**
0.31	10387	4332	77	1.30	**KAF127R77**	
0.35	9241	3854	77	1.45		
0.41	7869	3282	78	1.75		
					K127R77	
0.70	4577	1909	78	2.95	**KF127R77**	**4P**
0.76	4174	1741	78	3.25	**KA127R77**	
0.87	3661	1527	78	3.70	**KAF127R77**	
0.35	9138	3811	62	0.90		
0.40	8052	3358	62	1.05	**K107R77**	
0.45	7138	2977	62	1.15	**KF107R77**	**4P**
0.51	6229	2598	62	1.35	**KA107R77**	
0.58	5481	2286	62	1.55	**KAF107R77**	
0.69	4649	1939	62	1.80		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.37kW						
0.78	4107	1713	62	2.05	**K107R77**	
0.86	3728	1555	62	2.25	**KF107R77**	**4P**
1.0	3203	1336	62	2.60	**KA107R77**	
1.1	2796	1166	62	3.00	**KAF107R77**	
0.63	5090	2123	38	0.90		
0.72	4450	1856	38	1.00		
0.82	3896	1625	38	1.15		
0.93	3429	1430	38	1.30		
1.1	3024	1261	38	1.50	**K97R57**	
1.2	2642	1102	38	1.70	**KF97R57**	**4P**
1.4	2295	957	38	1.95	**KA97R57**	
1.6	2050	855	38	2.20	**KAF97R57**	
1.8	1782	743	38	2.50		
2.0	1561	651	38	2.90		
2.3	1374	573	38	3.25		
0.94	3393	1415	25	0.85		
1.1	2947	1229	26	0.95		
1.2	2585	1078	26	1.10		
1.4	2280	951	27	1.25	**K87R57**	
1.6	2007	837	27	1.40	**KF87R57**	
1.8	1741	726	27	1.60	**KA87R57**	**4P**
2.1	1530	638	27	1.85	**KAF87R57**	
2.4	1348	562	27	2.10		
2.8	1137	474	27	2.50		
3.1	1021	426	27	2.75		
3.6	894	373	27	3.15		
1.6	1959	817	10	0.85		
1.9	1702	710	14	0.95		
2.1	1494	623	16	1.10		
2.4	1326	553	16	1.20		
2.7	1163	485	17	1.40		
3.1	1026	428	18	1.60	**K77R37**	
3.6	882	368	18	1.85	**KF77R37**	**4P**
4.1	786	328	18	2.05	**KA77R37**	
4.6	698	291	18	2.30	**KAF77R37**	
5.3	604	252	19	2.70		
6.0	530	221	19	3.05		
6.8	468	195	19	3.45		
7.6	420	175	19	3.85		
8.6	369	154	19	4.40		
3.2	1007	420	8.6	0.85		
3.7	866	361	10	1.00		
4.1	774	323	11	1.10		
4.8	669	279	11	1.30	**K67R37**	
5.4	590	246	12	1.45	**KF67R37**	**4P**
6.1	520	217	12	1.65	**KA67R37**	
7.0	458	191	12	1.85	**KAF67R37**	
8.0	398	166	12	2.15		
9.2	345	144	12	2.50		
11	293	122	12	2.95		
4.8	671	280	7.1	0.95		
5.4	590	246	7.6	1.05		
6.2	516	215	8.1	1.20	**K57R37**	
6.9	460	192	8.3	1.35	**KF57R37**	
8.0	398	166	8.6	1.55	**KA57R37**	**4P**
9.2	348	145	8.7	1.80	**KAF57R37**	
10	309	129	8.9	2.00		
12	266	111	9.0	2.35		
14	233	97	9.1	2.70		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.37kW						
					K87	
3.8	886	174.19	27	3.00	**KF87**	**8P**
4.0	836	164.34	27	3.20	**KA87**	
4.5	749	147.32	27	3.50	**KAF87**	
4.5	744	197.37	27	3.50	**K87**	
					KF87	**6P**
5.1	657	174.19	27	4.00	**KA87**	
					KAF87	
4.9	689	135.51	18	2.20	**K77**	
5.1	655	128.73	18	2.30	**KF77**	**8P**
5.8	579	113.75	19	2.60	**KA77**	
6.8	494	97.21	19	3.10	**KAF77**	
5.8	582	154.28	19	2.60	**K77**	
6.6	511	135.51	19	2.90	**KF77**	**6P**
6.9	486	128.73	19	3.10	**KA77**	
7.8	429	113.75	19	3.50	**KAF77**	
					K77	
6.9	486	192.50	19	3.00	**KF77**	**4P**
7.4	453	179.67	19	3.20	**KA77**	
8.6	389	154.28	19	3.90	**KAF77**	
					K67	
6.1	549	108.02	11	1.45	**KF67**	**8P**
6.4	522	102.62	12	1.55	**KA67**	
7.3	458	90.04	12	1.75	**KAF67**	
7.2	466	123.54	12	1.70	**K67**	
8.2	407	108.02	12	1.95	**KF67**	**6P**
8.7	387	102.62	12	2.00	**KA67**	
9.9	340	90.04	12	2.30	**KAF67**	
9.2	365	144.79	12	2.20		
11	312	123.54	12	2.60	**K67**	
12	273	108.02	12	3.00	**KF67**	**4P**
15	227	90.04	12	3.60	**KA67**	
17	193	76.37	12	4.20	**KAF67**	
7.2	467	123.85	8.1	1.25		
8.2	408	108.29	8.3	1.40	**K57**	
8.7	388	102.88	8.4	1.50	**KF57**	**6P**
9.9	340	90.26	8.6	1.70	**KA57**	
11.6	289	76.56	8.8	2.00	**KAF57**	
12.9	261	69.12	8.9	2.20		
9.2	366	145.15	8.6	1.60		
11	313	123.85	8.8	1.90		
12	273	108.29	8.9	2.20	**K57**	
13	260	102.88	8.9	2.30	**KF57**	**4P**
15	228	90.26	9.1	2.60	**KA57**	
17	193	76.56	9.2	3.10	**KAF57**	
19	174	69.12	9.2	3.40		
8.5	394	104.37	5.2	1.00	**K47**	
9.8	343	90.86	6.2	1.10	**KF47**	**6P**
10	321	85.12	6.4	1.20	**KA47**	
12	284	75.20	6.7	1.35	**KAF47**	
					K47	
10	333	131.87	6.4	1.20	**KF47**	**4P**
11	307	121.48	6.6	1.30	**KA47**	
13	263	104.37	7.0	1.50	**KAF47**	
15	229	90.86	7.2	1.70		
16	215	85.12	7.3	1.85	**K47**	
18	190	75.20	7.4	2.10	**KF47**	**4P**
19	176	69.84	7.5	2.20	**KA47**	
21	160	63.30	7.6	2.50	**KAF47**	

K.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_β	机型号 Type size	极数 Pole
0.37kW						
14	247	97.81	2.4	0.80		
16	211	83.69	5.2	0.95		
18	183	72.54	5.4	1.10		
20	171	67.80	5.3	1.15		
23	148	58.61	5.2	1.35		
27	126	49.79	5.1	1.55		
30	112	44.46	5.0	1.75		
35	96	37.97	4.8	2.10		
37	90	35.57	4.7	2.20		
44	76	29.96	4.6	2.60		
46	73	28.83	4.5	2.70	**K37**	
53	63	24.99	4.4	3.10	**KF37**	
57	59	23.36	4.3	3.30	**KA37**	**4P**
66	51	20.19	4.1	3.60	**KAF37**	
78	43	17.15	4.0	4.10		
87	39	15.32	3.8	4.50		
102	33	13.08	3.7	4.90		
110	31	12.14	3.6	5.10		
127	26	10.49	3.4	5.90		
149	22	8.91	3.3	7.00		
167	20	7.96	3.2	7.60		
196	17	6.80	3.0	8.60		
209	16	6.37	3.0	8.90		
248	14	5.36	2.8	10		
0.55kW						
0.09	51772	15181	162	0.95		
0.11	43519	12761	171	1.10	**K187R97**	
0.12	39993	11727	171	1.20	**KA187R97**	**4P**
0.13	35515	10414	171	1.35		
0.21	22389	6565	171	2.10		
0.12	39219	11500	135	0.85		
0.14	34782	10199	135	0.95		
0.16	29237	8573	135	1.15	**K167R97**	
0.22	22007	6453	135	1.50	**KA167R97**	**4P**
0.26	17959	5266	135	1.85		
0.34	13822	4053	135	2.40		
0.20	23709	6952	104	0.75	**K157R97**	
0.23	20616	6045	106	0.85	**KF157R97**	
0.39	12202	3578	109	1.50	**KA157R97**	**4P**
0.45	10606	3110	110	1.70	**KAF157R97**	
0.32	14774	4332	72	0.90		
0.36	13143	3854	75	1.00	**K127R77**	
0.42	11193	3282	76	1.15	**KF127R77**	**4P**
0.47	10170	2982	77	1.30	**KA127R77**	
0.54	8812	2584	77	1.50	**KAF127R77**	
0.73	6510	1909	78	2.00		
0.80	5937	1741	78	2.20	**K127R77**	
0.91	5208	1527	78	2.50	**KF127R77**	**4P**
1.0	4553	1335	78	2.85	**KA127R77**	
1.2	3994	1171	78	3.25	**KAF127R77**	
1.4	3410	1000	78	3.80		
0.47	10153	2977	62	0.80	**K107R77**	
0.54	8860	2598	62	0.90	**KF107R77**	
0.61	7796	2286	62	1.05	**KA107R77**	**4P**
0.72	6613	1939	62	1.20	**KAF107R77**	
0.81	5842	1713	62	1.35	**K107R77**	
0.89	5303	1555	62	1.50	**KF107R77**	
1.0	4556	1336	62	1.75	**KA107R77**	**4P**
1.2	3976	1166	62	2.00	**KAF107R77**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_β	机型号 Type size	极数 Pole
0.55kW						
1.3	3513	1030	62	2.30	**K107R77**	
1.5	3083	904	62	2.60	**KF107R77**	
1.8	2704	793	62	2.95	**KA107R77**	**4P**
2.0	2374	696	62	3.35	**KAF107R77**	
2.3	2094	614	62	3.80		
0.97	4877	1430	38	0.90		
1.1	4300	1261	38	1.00		
1.3	3758	1102	38	1.15		
1.5	3264	957	38	1.30		
1.6	2916	855	38	1.45	**K97R57**	
1.9	2534	743	38	1.70	**KF97R57**	**4P**
2.1	2220	651	38	1.95	**KA97R57**	
2.4	1954	573	38	2.20	**KAF97R57**	
2.8	1719	504	38	2.50		
3.2	1490	437	38	2.90		
3.6	1303	382	38	3.30		
4.6	1040	305	38	4.15		
1.5	3243	951	25	0.85		
1.7	2854	837	26	0.95		
1.9	2476	726	26	1.10		
2.2	2176	638	27	1.25		
2.5	1917	562	27	1.40	**K87R57**	
2.9	1617	474	27	1.65	**KF87R57**	
3.3	1453	426	27	1.85	**KA87R57**	**4P**
3.7	1272	373	27	2.10	**KAF87R57**	
4.2	1125	330	27	2.40		
4.7	1003	294	27	2.70		
5.6	853	250	27	3.15		
5.9	805	236	27	3.35		
6.9	685	201	27	3.95		
2.5	1886	553	5.5	0.80		
2.9	1654	485	14	0.95		
3.2	1460	428	15	1.05		
3.8	1255	368	16	1.25	**K77R37**	
4.2	1119	328	17	1.40	**KF77R37**	
4.8	992	291	17	1.55	**KA77R37**	**4P**
5.5	859	252	18	1.80	**KAF77R37**	
6.3	754	221	18	2.05		
7.1	665	195	18	2.35		
7.9	597	175	19	2.60		
9.0	525	154	19	2.95		
5.0	951	279	7	0.85		
5.7	839	246	10	1.00		
6.4	740	217	10	1.10	**K67R37**	
7.3	651	191	11	1.25	**KF67R37**	**4P**
8.4	566	166	11	1.45	**KA67R37**	
9.7	491	144	12	1.65	**KAF67R37**	
11	416	122	12	1.95		
7.2	655	192	4.9	0.90		
8.4	566	166	7.5	1.05	**K57R37**	
9.6	495	145	8.0	1.20	**KF57R37**	**4P**
11	440	129	8.2	1.35	**KA57R37**	
13	379	111	8.5	1.60	**KAF57R37**	
14	331	97	8.7	1.80		
					K87	
3.8	1317	174.19	27	2.00	**KF87**	**8P**
4.0	1242	164.34	27	2.10	**KA87**	
4.5	1114	147.32	27	2.40	**KAF87**	

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.55kW						
4.5	1107	197.37	27	2.30	**K87**	6P
5.1	977	174.19	27	2.70	**KF87**	
5.4	921	164.34	27	2.80	**KA87**	
6.0	826	147.32	27	3.10	**KAF87**	
4.9	1025	135.51	17	1.50	**K77**	8P
5.1	973	128.73	17	1.55	**KF77**	
5.8	860	113.75	18	1.75	**KA77**	
6.8	735	97.21	18	2.10	**KAF77**	
5.8	865	154.28	18	1.70	**K77**	6P
6.6	760	135.51	18	1.95	**KF77**	
6.9	722	128.73	18	2.10	**KA77**	
7.8	638	113.75	18	2.30	**KAF77**	
9.0	554	154.28	19	2.60		4P
10	486	135.51	19	3.00	**K77**	
11	462	128.73	19	3.10	**KF77**	
12	408	113.75	19	3.50	**KA77**	
14	349	97.21	19	4.10	**KAF77**	
7.2	693	123.54	11	1.15		6P
8.2	606	108.02	11	1.30	**K67**	
8.7	575	102.62	11	1.35	**KF67**	
9.9	505	90.04	12	1.55	**KA67**	
12	428	76.37	12	1.85	**KAF67**	
11	443	123.54	12	1.70	**K67**	4P
13	388	108.02	12	1.95	**KF67**	
15	323	90.04	12	2.40	**KA67**	
18	274	76.37	12	2.80	**KAF67**	
8.2	607	108.29	7.0	0.95		6P
8.7	577	102.88	7.2	1.00	**K57**	
9.9	506	90.26	7.8	1.15	**KF57**	
12	429	76.56	8.2	1.35	**KA57**	
13	388	69.12	8.4	1.50	**KAF57**	
15	341	60.81	8.6	1.70		
15	322	57.42	8.7	1.80		
11	445	123.85	8.1	1.25		4P
13	389	108.29	8.4	1.45		
14	369	102.88	8.4	1.50	**K57**	
15	324	90.26	8.6	1.70	**KF57**	
18	275	76.56	8.8	2.00	**KA57**	
20	248	69.12	8.9	2.20	**KAF57**	
23	218	60.81	9.0	2.60		
24	206	57.42	9.1	2.70		
13	375	104.37	5.6	1.00		4P
15	326	90.86	6.2	1.15	**K47**	
16	306	85.12	6.5	1.50	**KF47**	
18	270	75.20	6.8	1.40	**KA47**	
20	251	69.84	6.9	1.50	**KAF47**	
22	227	63.30	7.1	1.65	**K47**	4P
24	204	56.83	7.3	1.80	**KF47**	
28	176	48.95	7.4	2.10	**KA47**	
30	165	46.04	7.5	2.20	**KAF47**	
24	210	58.61	4.6	0.90		4P
28	179	49.79	4.6	1.05		
31	160	44.46	4.5	1.15		
37	136	37.97	4.4	1.35		
39	128	35.57	4.4	1.45	**K37**	
46	108	29.96	4.2	1.75	**KF37**	
48	103	28.83	4.2	1.80	**KA37**	
56	90	24.99	4.1	2.10	**KAF37**	
60	84	23.36	4.0	2.20		
69	72	20.19	3.9	2.40		
81	62	17.15	3.8	2.70		
91	55	15.31	3.7	3.00		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.55kW						
106	47	13.08	3.5	3.30		4P
114	44	12.14	3.5	3.40		
133	38	10.49	3.3	4.00	**K37**	
156	32	8.91	3.2	4.70	**KF37**	
175	29	7.96	3.1	5.10	**KA37**	
204	24	6.80	3.0	5.70	**KAF37**	
218	23	6.37	2.9	5.90		
259	19	5.36	2.8	6.80		
0.75kW						
0.12	54536	11727	158	0.85		4P
0.13	48430	10414	169	0.95	**K187R97**	
0.21	30530	6565	171	1.50	**KA187R97**	
0.23	28056	6033	171	1.65		
0.26	24917	5358	171	1.90		
0.16	39868	8573	135	0.85		4P
0.22	30009	6453	135	1.10	**K167R97**	
0.26	24489	5266	135	1.35	**KA167R97**	
0.34	18848	4053	135	1.75		
0.42	15440	3320	135	2.10		
0.39	16639	3578	107	1.10	**K157R97** **KF157R97**	4P
0.45	14463	3110	108	1.25	**KA157R97** **KAF157R97**	
0.83	7757	1668	110	2.30	**K157R97** **KF157R97**	4P
1.0	6385	1373	110	2.80	**KA157R97** **KAF157R97**	
					K127R77	4P
0.42	15263	3282	72	0.85	**KF127R77**	
0.47	13868	2982	75	0.95	**KA127R77**	
0.54	12017	2584	76	1.10	**KAF127R77**	
0.73	8878	1909	77	1.45		4P
0.80	8096	1741	77	1.60		
0.91	7073	1521	78	1.85	**K127R77**	
1.0	6208	1335	78	2.10	**KF127R77**	
1.2	5446	1171	78	2.40	**KA127R77**	
1.4	4650	1000	78	2.80	**KAF127R77**	
1.6	4078	877	78	3.20		
0.81	7966	1713	62	1.00		4P
0.89	7231	1555	62	1.10		
1.0	6213	1336	62	1.30		
1.2	5422	1166	62	1.50	**K107R77**	
1.3	4790	1030	62	1.65	**KF107R77**	
1.5	4204	904	62	1.90	**KA107R77**	
1.8	3688	793	62	2.15	**KAF107R77**	
2.0	3237	696	62	2.45		
2.3	2855	614	62	2.80		
1.3	5125	1102	38	0.85		4P
1.5	4451	957	38	0.95		
1.6	3976	855	38	1.10		
1.9	3455	743	38	1.25		
2.1	3027	651	38	1.40		
2.4	2665	573	38	1.60	**K97R57**	
2.8	2344	504	38	1.85	**KF97R57**	
3.2	2032	437	38	2.10	**KA97R57**	
3.6	1776	382	38	2.40	**KAF97R57**	
4.6	1418	305	38	3.05		
5.4	1200	258	38	3.60		
6.0	1079	232	38	4.00		
7.0	925	199	38	4.65		

K.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.75kW						
1.9	3376	726	25	0.80		
2.2	2967	638	26	0.90		
2.5	2614	562	26	1.05		
2.9	2204	474	27	1.25		
3.3	1981	426	27	1.35	**K87R57**	
3.7	1735	373	27	1.55	**KF87R57**	**4P**
4.2	1535	330	27	1.75	**KA87R57**	
4.7	1367	294	27	2.00	**KAF87R57**	
5.6	1163	250	27	2.30		
5.9	1098	236	27	2.45		
6.9	935	201	27	2.90		
3.8	1711	368	13	0.90	**K77R37**	
4.2	1525	328	15	1.00	**KF77R37**	
4.8	1353	291	16	1.15	**KA77R37**	**4P**
5.5	1172	252	17	1.30	**KAF77R37**	
6.3	1028	221	17	1.50		
					K97	
3.9	1736	176.05	38	2.30	**KF97**	**8P**
4.5	1511	153.21	38	2.70	**KA97**	
4.9	1383	140.28	38	3.00	**KAF97**	
4.7	1453	147.32	27	1.75	**K87**	
5.4	1252	126.91	27	2.00	**KF87**	**8P**
6.0	1142	115.82	27	2.20	**KA87**	
6.7	1013	102.71	27	2.50	**KAF87**	
5.2	1302	174.19	27	1.95	**K87**	
5.5	1229	164.34	27	2.10	**KF87**	**6P**
6.2	1102	147.32	27	2.30	**KA87**	
7.2	949	126.91	27	2.70	**KAF87**	
7.0	966	197.37	27	2.60	**K87**	
8.0	853	174.19	27	3.00	**KF87**	**4P**
8.5	804	164.34	27	3.20	**KA87**	
9.4	721	147.32	27	3.50	**KAF87**	
6.7	1013	135.51	17	1.45		
7.1	963	128.73	17	1.50	**K77**	
8.0	851	113.75	18	1.70	**KF77**	**6P**
9.4	727	97.21	18	2.00	**KA77**	
10	666	89.12	18	2.20	**KAF77**	
9.0	755	154.28	18	1.95		
10	663	135.51	18	2.20	**K77**	
11	630	128.73	18	2.30	**KF77**	**4P**
12	557	113.75	19	2.60	**KA77**	
14	476	97.21	19	3.10	**KAF77**	
					K67	
11	605	123.54	11	1.30	**KF67**	**4P**
13	529	108.02	11	1.45	**KA67**	
15	441	90.04	12	1.75	**KAF67**	
18	374	76.37	12	2.10	**K67**	
20	338	68.95	12	2.30	**KF67**	**4P**
23	297	60.66	12	2.60	**KA67**	
24	280	57.28	12	2.80	**KAF67**	
11	606	123.85	6.8	0.95		
13	530	108.29	7.5	1.05		
14	504	102.88	7.8	1.10		
15	442	90.26	8.1	1.30	**K57**	
18	375	76.56	8.4	1.50	**KF57**	**4P**
20	338	69.12	8.6	1.65	**KA57**	
23	298	60.81	8.8	1.90	**KAF57**	
24	281	57.42	8.8	2.00		
28	239	48.89	9.0	2.40		
31	217	44.43	9.1	2.60		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
0.75kW						
					K47	
18	368	75.20	5.8	1.00	**KF47**	**4P**
20	342	69.84	6.1	1.10	**KA47**	
22	310	63.30	6.5	1.20	**KAF47**	
24	278	56.83	6.8	1.35		
28	240	48.95	7.1	1.55	**K47**	
30	225	46.04	7.2	1.65	**KF47**	**4P**
35	194	39.61	7.4	1.95	**KA47**	
39	173	35.39	7.4	2.20	**KAF47**	
44	153	31.30	7.2	2.50		
31	218	44.46	4.0	0.85		
37	186	37.97	3.9	1.00		
39	174	35.57	3.9	1.10		
46	147	29.96	3.9	1.30		
48	141	28.83	3.9	1.35		
56	122	24.99	3.8	1.55		
60	114	23.36	3.8	1.60		
69	99	20.19	3.7	1.75	**K37**	
81	84	17.15	3.6	2.00	**KF37**	**4P**
91	75	15.32	3.5	2.20	**KA37**	
106	64	13.08	3.4	2.40	**KAF37**	
114	59	12.14	3.3	2.50		
133	51	10.49	3.2	2.90		
156	44	8.91	3.1	3.50		
175	39	7.96	3.0	3.80		
204	33	6.80	2.9	4.20		
218	31	6.37	2.8	4.40		
259	26	5.36	2.7	5.00		
1.1kW						
0.17	56695	8372	154	0.80		
0.19	49205	7266	167	0.95		
0.21	44458	6565	171	1.05		
0.23	40855	6033	171	1.15	**K187R97**	**4P**
0.26	36284	5358	171	1.30	**KA187R97**	
0.29	32438	4790	171	1.45		
0.33	29167	4307	171	1.60		
0.36	26140	3860	171	1.75		
0.27	35661	5266	135	0.90		
0.30	31882	4708	135	1.05	**K167R97**	**4P**
0.35	27447	4053	135	1.20	**KA167R97**	
0.42	22483	3320	135	1.45		
0.52	18345	2709	135	1.80		
0.65	14682	2168	135	2.20		
0.83	11465	1693	135	2.80	**K167R97**	**4P**
1.01	9372	1384	135	3.40	**KA167R97**	
1.10	8627	1274	135	3.70		
0.39	24230	3578	104	0.75	**K157R97**	
0.45	21061	3110	106	0.85	**KF157R97**	**4P**
0.53	17776	2625	107	1.00	**KA157R97**	
0.60	15887	2346	108	1.15	**KAF157R97**	
0.84	11296	1668	109	1.60		
1.0	9298	1373	110	1.95	**K157R97**	
1.1	8370	1236	110	2.15	**KF157R97**	**4P**
1.3	7483	1105	110	2.40	**KA157R97**	
1.5	6501	960	110	2.75	**KAF157R97**	
1.6	5892	870	110	3.05		
0.73	12928	1909	75	1.00	**K127R77**	
0.80	11790	1741	76	1.10	**KF127R77**	**4P**
0.92	10341	1527	76	1.25	**KA127R77**	
1.0	9041	1335	77	1.45	**KAF127R77**	

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
1.1kW						
1.2	7930	1171	77	1.65		
1.4	6772	1000	78	1.90		
1.6	5939	877	78	2.20	**K127R77**	
1.8	5302	783	78	2.45	**KF127R77**	
2.0	4727	698	78	2.75	**KA127R77**	**4P**
2.3	4097	605	78	3.20	**KAF127R77**	
2.6	3711	548	78	3.50		
3.0	3203	473	78	4.05		
1.2	7896	1166	62	1.00		
1.4	6975	1030	62	1.15		
1.5	6122	904	62	1.30		
1.8	5370	793	62	1.50	**K107R77**	
2.0	4713	696	62	1.70	**KF107R77**	
2.3	4158	614	62	1.90	**KA107R77**	**4P**
2.7	3535	522	62	2.25	**KAF107R77**	
3.0	3122	461	62	2.55		
3.4	2763	408	62	2.90		
3.8	2465	364	62	3.25		
4.4	2153	318	62	3.70		
1.9	5032	743	38	0.85		
2.2	4409	651	38	0.95	**K97R57**	
2.4	3880	573	38	1.10	**KF97R57**	
2.8	3413	504	38	1.25	**KA97R57**	**4P**
3.2	2959	437	38	1.45	**KAF97R57**	
3.7	2587	382	38	1.65		
4.1	2316	342	38	1.85		
3.0	3210	474	25	0.85		
3.3	2885	426	26	0.95		
3.8	2526	373	26	1.05	**K87R57**	
4.2	2235	330	26	1.20	**KF87R57**	**4P**
4.8	1991	294	27	1.35	**KA87R57**	
5.6	1693	250	27	1.60	**KAF87R57**	
5.9	1598	236	27	1.70		
7.0	1361	201	27	2.00		
3.9	2546	176.05	38	1.60	**K97**	
4.5	2216	153.21	38	1.80	**KF97**	**8P**
4.9	2029	140.28	38	2.00	**KA97**	
5.6	1792	123.93	38	2.20	**KAF97**	
5.2	1931	176.05	38	2.10	**K97**	
5.9	1680	153.21	38	2.50	**KF97**	**6P**
6.5	1538	140.28	38	2.70	**KA97**	
7.3	1359	123.93	38	3.00	**KAF97**	
					K97	
8.0	1255	176.05	38	3.30	**KF97**	**4P**
9.1	1092	153.21	38	3.70	**KA97**	
10	1000	140.28	38	4.10	**KAF97**	
5.2	1910	174.19	27	1.35	**K87**	
5.5	1802	164.34	27	1.45	**KF87**	**6P**
6.2	1616	147.32	27	1.60	**KA87**	
7.2	1392	126.91	27	1.85	**KAF87**	
8.0	1242	174.19	27	2.10		
8.5	1171	164.34	27	2.20	**K87**	
9.5	1050	147.32	27	2.40	**KF87**	**4P**
11	905	126.91	27	2.80	**KA87**	
12	826	115.82	27	3.10	**KAF87**	
6.7	1486	135.51	15	1.00	**K77**	
7.1	1412	128.73	15	1.05	**KF77**	**6P**
8.0	1247	113.75	16	1.20	**KA77**	
9.4	1066	97.21	17	1.40	**KAF77**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
1.1kW						
					K77	
10	966	135.51	17	1.55	**KF77**	**4P**
11	918	128.73	17	1.60	**KA77**	
12	811	113.75	18	1.80	**KAF77**	
14	693	97.21	18	2.10	**K77**	
16	635	89.12	18	2.30	**KF77**	**4P**
18	557	78.20	19	2.70	**KA77**	
19	528	74.11	19	2.80	**KAF77**	
13	770	108.02	10	1.00		
14	732	102.62	10	1.05	**K67**	
16	642	90.04	11	1.20	**KF67**	**4P**
18	544	76.37	11	1.45	**KA67**	
20	492	68.95	12	1.60	**KAF67**	
23	432	60.66	12	1.80		
24	408	57.28	12	1.90	**K67**	
29	348	48.77	12	2.20	**KF67**	**4P**
32	316	44.32	12	2.50	**KA67**	
36	274	38.39	12	2.80	**KAF67**	
16	643	90.26	2.3	0.90		
18	546	76.56	7.4	1.05		
20	493	69.12	7.9	1.15		
23	433	60.81	8.2	1.30	**K57**	
24	409	57.42	8.3	1.40	**KF57**	
29	349	48.89	8.6	1.65	**KA57**	**4P**
32	317	44.43	8.7	1.80	**KAF57**	
36	274	38.49	8.9	2.10		
39	254	35.70	8.9	2.20		
46	216	30.28	9.1	2.60		
51	195	27.34	9.0	2.90		
58	171	24.05	8.8	3.30		
62	162	22.71	8.6	3.50		
72	138	19.34	8.3	4.00		
80	125	17.57	8.1	4.20		
92	108	15.22	7.8	4.70	**K57**	
106	94	13.25	7.5	5.10	**KF57**	**4P**
117	85	11.92	7.2	4.60	**KA57**	
124	80	11.26	7.1	4.90	**KAF57**	
146	68	9.59	6.8	5.60		
161	62	8.71	6.6	6.00		
185	54	7.55	6.3	6.40		
213	47	6.57	6.1	7.00		
					K47	
25	405	56.83	3.1	0.95	**KF47**	**4P**
29	349	48.95	6.0	1.10	**KA47**	
30	328	46.04	6.3	1.15	**KAF47**	
35	282	39.61	6.7	1.35		
40	252	35.39	6.7	1.50	**K47**	
45	223	31.30	6.6	1.70	**KF47**	
48	209	29.32	6.5	1.80	**KA47**	**4P**
54	185	25.91	6.4	2.10	**KAF47**	
64	155	21.81	6.2	2.40		
72	140	19.58	6.0	2.70		
47	214	29.96	3.2	0.90		
56	178	24.99	3.3	1.05	**K37**	
60	167	23.36	3.3	1.10	**KF37**	
69	144	20.19	3.2	1.20	**KA37**	**4P**
82	122	17.15	3.2	1.40	**KAF37**	
91	109	15.32	3.2	1.50		
107	93	13.08	3.1	1.70		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
1.1kW						
115	87	12.14	3.1	1.75		
133	75	10.49	3.0	2.00	**K37**	
157	64	8.91	2.9	2.40	**KF37**	
176	57	7.96	2.8	2.60	**KA37**	**4P**
206	48	6.80	2.7	2.90	**KAF37**	
220	45	6.37	2.7	3.00		
261	38	5.36	2.6	3.50		
1.5kW						
0.23	55712	6033	154	0.80		
0.26	49478	5358	165	0.95	**K187R97**	**4P**
0.29	44233	4790	171	1.05	**KA187R97**	
0.33	39773	4307	171	1.15		
0.36	35645	3860	171	1.30		
0.43	29800	3227	171	1.50		
0.51	25275	2737	171	1.80	**K187R97**	**4P**
0.62	20796	2252	171	2.20	**KA187R97**	
0.69	18728	2028	171	2.50		
0.35	37427	4053	135	0.85	**K167R97**	**4P**
0.42	30659	3320	135	1.05	**KA167R97**	
0.52	25016	2709	135	1.30		
0.65	20020	2168	135	1.60		
0.83	15634	1693	135	2.10	**K167R97**	**4P**
1.01	12781	1384	135	2.50	**KA167R97**	
1.10	11765	1274	135	2.70		
0.60	21664	2346	105	0.80	**K157R97** **KF157R97** **KA157R97** **KAF157R97**	**4P**
0.84	15403	1668	108	1.10		
1.0	12679	1373	109	1.35		
1.1	11414	1236	109	1.50	**K157R97**	
1.3	10204	1105	110	1.70	**KF157R97**	**4P**
1.5	8865	960	110	1.95	**KA157R97**	
1.6	8034	870	110	2.15	**KAF157R97**	
2.5	5264	570	110	3.25		
2.7	4710	510	111	3.65		
					K127R87	
2.6	4996	541	78	2.50	**KF127R87**	**4P**
3.3	3906	423	78	3.15	**KA127R87**	
3.8	3408	369	78	3.65	**KAF127R87**	
0.80	16077	1741	70	0.80		
0.92	14101	1527	74	0.90		
1.0	12328	1335	76	1.05		
1.2	10814	1171	76	1.20		
1.4	9235	1000	77	1.40	**K127R77**	
1.6	8099	877	77	1.60	**KF127R77**	**4P**
1.8	7231	783	78	1.80	**KA127R77**	
2.0	6446	698	78	2.00	**KAF127R77**	
2.3	5587	605	78	2.35		
2.6	5061	548	78	2.55		
3.0	4368	473	78	3.00		
3.4	3786	410	78	3.45		
1.4	9512	1030	62	0.85		
1.5	8348	904	62	0.95		
1.8	7323	793	62	1.10		
2.0	6427	696	62	1.25	**K107R77**	
2.3	5670	614	62	1.40	**KF107R77**	**4P**
2.7	4820	522	62	1.65	**KA107R77**	
3.0	4257	461	62	1.90	**KAF107R77**	
3.4	3768	408	62	2.10		
3.8	3361	364	62	2.40		
4.4	2937	318	62	2.70		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
1.5kW						
2.4	5291	573	38	0.80		
2.8	4654	504	38	0.90		
3.2	4035	437	38	1.05		
3.7	3528	382	38	1.20	**K97R57**	
4.1	3158	342	38	1.35	**KF97R57**	**4P**
4.6	2817	305	38	1.55	**KA97R57**	
5.4	2383	258	38	1.80	**KAF97R57**	
6.0	2142	232	38	2.00		
7.0	1838	199	38	2.35		
4.2	3047	330	25	0.90		
4.8	2715	294	26	1.00	**K87R57**	
5.6	2309	250	26	1.15	**KF87R57**	**4P**
5.9	2179	236	27	1.25	**KA87R57**	
7.0	1856	201	27	1.45	**KAF87R57**	
7.7	1690	183	27	1.60		
					K107	
4.7	2871	143.47	62	2.70	**KF107**	**8P**
5.6	2431	121.46	62	3.20	**KA107**	
6.0	2250	112.41	62	3.50	**KAF107**	
					K97	
4.4	3066	153.21	38	1.35	**KF97**	**8P**
4.8	2807	140.28	38	1.50	**KA97**	
5.5	2480	123.93	38	1.70	**KAF97**	
5.3	2549	176.05	38	1.55	**K97**	
6.1	2218	153.21	38	1.80	**KF97**	**6P**
6.7	2031	140.28	38	1.95	**KA97**	
7.6	1794	123.93	38	2.20	**KAF97**	
8.0	1711	176.05	38	2.40	**K97**	
9.1	1489	153.21	38	2.80	**KF97**	**4P**
10	1364	140.28	38	3.00	**KA97**	
11	1205	123.93	38	3.40	**KAF97**	
6.4	2133	147.32	26	1.20	**K87**	
7.4	1837	126.91	27	1.35	**KF87**	**6P**
8.1	1677	115.82	27	1.50	**KA87**	
9.2	1487	102.71	27	1.70	**KAF87**	
8.0	1693	174.19	27	1.55		
8.5	1597	164.34	27	1.60	**K87**	
9.5	1432	147.32	27	1.80	**KF87**	
11	1234	126.91	27	2.10	**KA87**	**4P**
12	1126	115.82	27	2.30	**KAF87**	
14	998	102.71	27	2.60		
16	839	86.34	27	3.10		
8.3	1647	113.75	13	0.90	**K77**	
9.7	1407	97.21	15	1.05	**KF77**	**6P**
11	1290	89.12	16	1.10	**KA77**	
12	1132	78.20	17	1.30	**KAF77**	
10	1317	135.51	16	1.15		
11	1251	128.73	16	1.20	**K77**	
12	1106	113.75	17	1.35	**KF77**	**4P**
14	945	97.21	17	1.55	**KA77**	
16	866	89.12	18	1.70	**KAF77**	
18	760	78.20	18	1.95		
19	720	74.11	18	2.10		
22	630	64.86	18	2.40	**K77**	
24	568	58.44	19	2.60	**KF77**	**4P**
27	498	51.26	19	3.00	**KA77**	
31	440	45.24	19	3.40	**KAF77**	
35	390	40.10	19	3.80		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
1.5kW						
16	875	90.04	8.9	0.90		
18	742	76.37	10	1.05	**K67**	
20	670	68.95	11	1.15	**KF67**	**4P**
23	590	60.66	11	1.35	**KA67**	
24	557	57.28	11	1.40	**KAF67**	
29	474	48.77	12	1.65		
32	431	44.32	12	1.80		
36	373	38.39	12	2.00	**K67**	
39	346	35.61	12	2.30	**KF67**	**4P**
46	294	30.21	12	2.70	**KA67**	
51	265	27.27	12	3.00	**KAF67**	
58	233	23.99	12	3.30		
23	591	60.81	7.1	0.95	**K57**	
24	558	57.42	7.4	1.05	**KF57**	**4P**
29	475	48.89	8.0	1.20	**KA57**	
32	432	44.43	8.2	1.35	**KAF57**	
36	374	38.49	8.5	1.55		
39	347	35.70	8.6	1.65	**K57**	
46	294	30.28	8.7	1.95	**KF57**	
51	266	27.34	8.6	2.20	**KA57**	**4P**
58	234	24.05	8.3	2.50	**KAF57**	
62	221	22.71	8.2	2.60		
72	188	19.34	7.9	2.90		
					K47	
35	385	39.61	5.6	1.00	**KF47**	**4P**
40	344	35.39	6.0	1.10	**KA47**	
45	304	31.30	6.0	1.25	**KAF47**	
48	285	29.32	6.0	1.35		
54	252	25.91	5.9	1.50		
64	212	21.81	5.7	1.80	**K47**	
72	190	19.58	5.7	2.00	**KF47**	
83	164	16.86	5.5	2.20	**KA47**	**4P**
88	154	15.86	5.4	2.40	**KAF47**	
103	133	13.65	5.3	2.60		
115	118	12.19	5.2	2.80		
119	114	11.77	5.1	2.30		
60	227	23.36	2.7	0.80		
69	196	20.19	2.8	0.90		
82	167	17.15	2.8	1.05		
91	149	15.31	2.8	1.10	**K37**	
107	127	13.08	2.8	1.25	**KF37**	
115	118	12.14	2.8	1.30	**KA37**	**4P**
133	102	10.49	2.7	1.50	**KAF37**	
157	87	8.91	2.7	1.75		
176	77	7.96	2.6	1.90		
206	66	6.80	2.6	2.20		
220	62	6.37	2.5	2.20		
261	52	5.36	2.5	2.60		
2.2kW						
0.37	51183	3860	158	0.85	**K187R97**	**4P**
0.57	32990	2488	171	1.35	**KA187R97**	
0.44	42789	3227	171	1.00		
0.52	36292	2737	171	1.20		
0.63	29861	2252	171	1.50	**K187R97**	
0.71	26891	2028	171	1.65	**KA187R97**	**4P**
0.78	24345	1836	171	1.80		
0.88	21587	1628	171	2.10		
1.08	17583	1326	171	2.30		
0.53	35921	2709	135	0.85	**K167R97**	**4P**
0.64	29821	2249	135	1.05	**KA167R97**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
2.2kW						
0.66	28747	2168	135	1.10		
0.84	22449	1693	135	1.40		
1.03	18352	1384	135	1.70	**K167R97**	**4P**
1.12	16893	1274	135	1.85	**KA167R97**	
1.31	14506	1094	135	2.20		
1.54	12318	929	135	2.50		
0.86	22117	1668	104	0.80		
1.0	18206	1373	106	1.00	**K157R97**	
1.2	16389	1236	107	1.10	**KF157R97**	
1.3	14652	1105	108	1.20	**KA157R97**	**4P**
1.5	12729	960	109	1.40	**KAF157R97**	
1.6	11536	870	109	1.55		
1.9	10077	760	110	1.80		
2.6	7174	541	78	1.80		
3.0	6325	477	78	2.05	**K127R87**	
3.4	5609	423	78	2.30	**KF127R87**	**4P**
3.9	4893	369	78	2.65	**KA127R87**	
4.3	4416	333	78	2.95	**KAF127R87**	
1.4	13260	1000	74	0.95		
1.6	11629	877	76	1.10		
1.8	10382	783	76	1.25	**K127R77**	
2.0	9255	698	77	1.40	**KF127R77**	**4P**
2.4	8022	605	77	1.60	**KA127R77**	
2.6	7266	548	78	1.80	**KAF127R77**	
3.0	6272	473	78	2.05		
3.5	5437	410	78	2.35		
2.3	8142	614	62	1.00		
2.7	6922	522	62	1.15		
3.1	6113	461	62	1.30	**K107R77**	
3.5	5410	408	62	1.45	**KF107R77**	**4P**
3.9	4827	364	62	1.65	**KA107R77**	
4.5	4217	318	62	1.90	**KAF107R77**	
5.0	3792	286	62	2.10		
5.7	3328	251	62	2.40		
3.7	5065	382	38	0.85		
4.2	4535	342	38	0.95	**K97R57**	
4.7	4044	305	38	1.05	**KF97R57**	**4P**
5.5	3421	258	38	1.25	**KA97R57**	
6.2	3076	232	38	1.40	**KAF97R57**	
7.2	2639	199	38	1.60		
4.9	4033	143.47	62	1.85	**K107**	
5.8	3414	121.46	62	2.20	**KF107**	**8P**
6.3	3160	112.41	62	2.40	**KA107**	
7.0	2832	100.75	62	2.70	**KAF107**	
6.1	3253	153.21	38	1.25	**K97**	
6.7	2979	140.28	38	1.35	**KF97**	**6P**
7.6	2631	123.93	38	1.55	**KA97**	
8.9	2232	105.13	38	1.85	**KAF97**	
8.1	2457	176.05	38	1.65	**K97**	
9.3	2138	153.21	38	1.90	**KF97**	**4P**
10	1958	140.28	38	2.10	**KA97**	
12	1730	123.93	38	2.30	**KAF97**	
14	1467	105.13	38	2.80	**K97** **KF97**	**4P**
15	1351	96.80	38	3.00	**KA97** **KAF97**	
					K87	
9.7	2056	147.32	27	1.25	**KF87**	**4P**
11	1771	126.91	27	1.45	**KA87**	
12	1617	115.82	27	1.55	**KAF87**	

K.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
2.2kW						
14	1434	102.71	27	1.75		
17	1205	86.34	27	2.10	**K87**	
18	1107	79.34	27	2.30	**KF87**	**4P**
20	983	70.46	27	2.60	**KA87**	
23	879	63.00	27	2.90	**KAF87**	
25	791	56.64	27	3.20		
13	1588	113.75	14	0.90		
15	1357	97.21	15	1.05	**K77**	
16	1244	89.12	16	1.15	**KF77**	**4P**
18	1091	78.20	17	1.35	**KA77**	
19	1034	74.11	17	1.40	**KAF77**	
22	905	64.86	17	1.60		
24	816	58.44	18	1.80		
28	715	51.26	18	2.00		
32	631	45.24	18	2.30	**K77**	
36	560	40.10	19	2.60	**KF77**	**4P**
41	492	35.25	19	3.00	**KA77**	
46	432	30.93	19	3.40	**KAF77**	
49	409	29.31	19	3.60		
56	358	25.66	19	4.10		
24	847	60.66	9.0	0.90		
25	799	57.28	10	0.95	**K67**	
29	681	48.77	11	1.15	**KF67**	
32	619	44.32	11	1.25	**KA67**	**4P**
37	536	38.39	11	1.40	**KAF67**	
40	497	35.61	12	1.55		
47	422	30.21	12	1.80		
52	381	27.27	12	2.00		
60	335	23.99	12	2.20		
63	316	22.66	12	2.30		
74	269	19.29	12	2.60		
82	245	17.53	12	2.80	**K67**	
94	212	15.19	12	3.10	**KF67**	**4P**
108	185	13.22	12	3.40	**KA67**	
115	174	12.48	12	2.80	**KAF67**	
135	148	10.63	12	3.20		
148	135	9.66	12	3.30		
171	117	8.37	12	3.50		
196	102	7.28	12	3.90		
32	620	44.43	4.8	0.90	**K57**	
37	537	38.49	7.5	1.05	**KF57**	**4P**
40	498	35.70	7.8	1.15	**KA57**	
47	423	30.28	7.8	1.35	**KAF57**	
52	382	27.34	7.8	1.45		
59	336	24.05	7.6	1.65		
63	317	22.71	7.6	1.75		
74	270	19.34	7.4	2.00	**K57**	
81	245	17.57	7.2	2.10	**KF57**	
94	212	15.22	7.1	2.40	**KA57**	**4P**
108	185	13.25	6.9	2.60	**KAF57**	
120	166	11.92	6.5	2.30		
127	157	11.26	6.5	2.50		
149	134	9.59	6.5	2.90		
164	122	8.71	6.5	3.20		
					K47	
55	362	25.91	5.0	1.05	**KF47**	**4P**
66	304	21.81	5.0	1.25	**KA47**	
73	273	19.58	5.0	1.35	**KAF47**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
2.2kW						
85	235	16.86	4.9	1.50		
90	221	15.86	4.9	1.60	**K47**	
105	191	13.65	4.8	1.75	**KF47**	
117	170	12.19	4.7	1.95	**KA47**	**4P**
121	164	11.77	4.6	1.60	**KAF47**	
135	148	10.57	4.6	1.80		
157	127	9.10	4.5	2.10		
109	183	13.08	2.3	0.85		
136	146	10.49	2.3	1.00	**K37**	
160	124	8.91	2.3	1.20	**KF37**	
180	111	7.96	2.3	1.30	**KA37**	**4P**
210	95	6.80	2.3	1.50	**KAF37**	
224	89	6.37	2.3	1.55		
267	75	5.36	2.2	1.75		
3.0kW						
0.52	49489	2737	160	0.90		
0.57	44987	2488	170	0.95		
0.63	40720	2252	171	1.05		
0.71	36669	2028	171	1.20	**K187R97**	
0.78	33198	1836	171	1.30	**KA187R97**	**4P**
0.88	29437	1628	171	1.50		
1.1	23976	1326	171	1.70		
1.1	22548	1247	171	1.95		
1.3	19402	1073	171	2.30		
0.84	30612	1693	135	1.00		
1.0	25025	1384	135	1.20		
1.1	23036	1274	135	1.35	**K167R97**	
1.3	19781	1094	135	1.55	**KA167R97**	**4P**
1.5	16798	929	135	1.85		
1.7	15152	838	135	2.10		
1.9	13453	744	135	2.30		
1.2	22349	1236	104	0.80		
1.3	19980	1105	105	0.90	**K157R97**	
1.5	17358	960	107	1.05	**KF157R97**	
1.6	15731	870	108	1.15	**KA157R97**	**4P**
1.9	13742	760	108	1.30	**KAF157R97**	
2.5	10306	570	109	1.75		
2.8	9222	510	110	1.95		
2.6	9782	541	77	1.30		
3.0	8625	477	77	1.50	**K127R87**	
3.4	7648	423	77	1.70	**KF127R87**	**4P**
3.9	6672	369	78	1.95	**KA127R87**	
4.3	6021	333	78	2.15	**KAF127R87**	
4.9	5226	289	78	2.45		
1.8	14158	783	73	0.90		
2.0	12621	698	75	1.00	**K127R77**	
2.4	10939	605	76	1.20	**KF127R77**	**4P**
2.6	9909	548	77	1.30	**KA127R77**	
3.0	8625	477	77	1.50	**KAF127R77**	
3.5	7413	410	77	1.75		
3.1	8336	461	62	0.95		
3.5	7377	408	62	1.05	**K107R77**	
3.9	6582	364	62	1.20	**KF107R77**	
4.5	5750	318	62	1.40	**KA107R77**	**4P**
5.0	5171	286	62	1.55	**KAF107R77**	
5.7	4538	251	62	1.75		
6.4	4014	222	62	2.00		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
3.0kW						
7.3	3544	196	62	2.25	**K107R77**	
8.2	3146	174	62	2.55	**KF107R77**	**4P**
9.3	2785	154	62	2.85	**KA107R77**	
10	2531	140	62	3.15	**KAF107R77**	
					K97R57	
5.5	4665	258	38	0.90	**KF97R57**	**4P**
6.2	4195	232	38	1.00	**KA97R57**	
7.2	3598	199	38	1.20	**KAF97R57**	
4.9	5500	143.47	62	1.40		
5.8	4656	121.46	62	1.65	**K107**	
6.3	4309	112.41	62	1.80	**KF107**	**8P**
7.0	3862	100.75	62	2.00	**KA107**	
7.8	3487	90.96	62	2.20	**KAF107**	
6.7	4068	143.47	62	1.85	**K107**	
7.9	3444	121.46	62	2.20	**KF107**	**6P**
8.5	3187	112.41	62	2.30	**KA107**	
9.5	2856	100.75	62	2.60	**KAF107**	
10	2731	143.47	62	2.70	**K107** **KF107**	**4P**
12	2312	121.46	62	3.20	**KA107** **KAF107**	
7.7	3514	123.93	38	1.15	**K97**	
9.1	2981	105.13	38	1.35	**KF97**	**6P**
9.9	2744	96.80	38	1.45	**KA97**	
11	2453	86.52	38	1.65	**KAF97**	
8.1	3351	176.05	38	1.20	**K97**	
9.3	2916	153.21	38	1.35	**KF97**	**4P**
10	2670	140.28	38	1.50	**KA97**	
12	2359	123.93	38	1.70	**KAF97**	
14	2001	105.13	38	2.00		
15	1842	96.80	38	2.20	**K97**	
17	1647	86.52	38	2.40	**KF97**	
18	1482	77.89	38	2.70	**KA97**	**4P**
20	1343	70.54	38	3.00	**KAF97**	
23	1191	62.55	38	3.40		
25	1076	56.55	38	3.70		
9.7	2804	147.32	26	0.90	**K87**	
11	2416	126.91	26	1.05	**KF87**	**4P**
12	2204	115.82	26	1.15	**KA87**	
14	1955	102.71	27	1.30	**KAF87**	
17	1643	86.34	27	1.55		
18	1510	79.34	27	1.65		
20	1341	70.46	27	1.85	**K87**	
23	1199	63.00	27	2.10	**KF87**	**4P**
25	1078	56.64	27	2.30	**KA87**	
29	936	49.16	27	2.70	**KAF87**	
32	838	44.02	27	2.90		
39	695	36.52	27	3.30		
16	1696	89.12	12	0.85		
18	1488	78.20	14	0.95	**K77**	
19	1411	74.11	15	1.00	**KF77**	**4P**
22	1234	64.86	16	1.15	**KA77**	
24	1112	58.44	17	1.30	**KAF77**	
28	976	51.26	17	1.50		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
3.0kW						
32	861	45.24	18	1.70		
36	763	40.10	18	1.90		
37	732	38.45	18	2.20	**K77**	
41	671	35.25	18	2.50	**KF77**	
46	589	30.93	18	2.80	**KA77**	**4P**
49	558	29.31	18	3.00	**KAF77**	
56	488	25.66	18	3.40		
62	440	23.11	18	3.80		
71	386	20.28	18	4.30		
32	844	44.32	9.0	0.90		
37	731	38.39	10	1.00	**K67**	
40	678	35.61	11	1.15	**KF67**	**4P**
47	575	30.21	11	1.35	**KA67**	
52	519	27.27	11	1.45	**KAF67**	
60	457	23.99	12	1.65		
63	431	22.66	12	1.70		
74	367	19.29	12	1.95		
82	334	17.53	12	2.10		
94	289	15.19	12	2.20	**K67**	
108	252	13.22	12	2.50	**KF67**	**4P**
115	238	12.48	12	2.10	**KA67**	
135	202	10.63	12	2.30	**KAF67**	
148	184	9.66	12	2.40		
171	159	8.37	12	2.70		
196	139	7.28	12	3.10		
					K57	
47	576	30.28	6.8	0.95	**KF57**	**4P**
52	520	27.34	6.8	1.05	**KA57**	
59	458	24.05	6.8	1.20	**KAF57**	
63	432	22.71	6.8	1.30		
74	368	19.34	6.7	1.45		
81	334	17.57	6.7	1.55		
94	290	15.22	6.5	1.70	**K57**	
108	252	13.25	6.4	1.90	**KF57**	
120	227	11.92	6.1	1.70	**KA57**	**4P**
127	214	11.26	6.1	1.80	**KAF57**	
149	183	9.59	5.9	2.10		
164	166	8.71	5.8	2.20		
189	144	7.55	5.6	2.40		
218	125	6.57	5.5	2.60		
					K47	
73	373	19.58	4.2	1.00	**KF47**	**4P**
85	321	16.86	4.3	1.10	**KA47**	
90	302	15.86	4.3	1.15	**KAF47**	
105	260	13.65	4.3	1.30		
117	232	12.19	4.3	1.40		
121	224	11.77	4.2	1.15	**K47**	
135	201	10.57	4.1	1.30	**KF47**	
157	173	9.10	4.1	1.50	**KA47**	**4P**
167	163	8.56	4.1	1.55	**KAF47**	
194	140	7.36	4.0	1.65		
217	125	6.58	3.9	1.80		
246	111	5.81	3.8	1.95		
160	170	8.91	1.9	0.90		
180	152	7.96	1.9	0.95	**K37**	
210	129	6.80	2.0	1.10	**KF37**	**4P**
224	121	6.37	2.0	1.10	**KA37**	
267	102	5.36	2.0	1.30	**KAF37**	

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
4.0kW						
1.7	19991	835	171	2.50	**K187R107**	**4P**
3.2	10774	450	171	4.00	**KA187R107**	
0.64	53916	2252	152	0.80		
0.71	48553	2028	162	0.90		
0.78	43956	1836	170	1.00		
0.88	38976	1628	171	1.10	**K187R97**	
1.1	31746	1326	171	1.25	**KA187R97**	**4P**
1.2	29855	1247	171	1.45		
1.3	25689	1073	171	1.70		
1.5	22385	935	171	1.95		
1.7	20254	846	171	2.20		
1.0	33135	1384	135	0.90		
1.1	30501	1274	135	1.00		
1.3	26192	1094	135	1.20	**K167R97**	
1.6	22241	929	135	1.40	**KA167R97**	**4P**
1.7	20063	838	135	1.55		
1.9	17812	744	135	1.75		
2.3	15035	628	135	2.10		
1.7	20829	870	105	0.85		
1.9	18195	760	106	1.00	**K157R97**	
2.5	13647	570	108	1.30	**KF157R97**	**4P**
2.8	12210	510	109	1.45	**KA157R97**	
3.3	10462	437	109	1.70	**KAF157R97**	
2.7	12952	541	75	1.00		
3.0	11420	477	76	1.15	**K127R87**	
3.4	10127	423	77	1.30	**KF127R87**	
3.9	8834	369	77	1.45	**KA127R87**	**4P**
4.3	7972	333	77	1.65	**KAF127R87**	
5.0	6919	289	78	1.90		
5.7	6081	254	78	2.15		
2.4	14484	605	72	0.90	**K127R77**	
2.6	13120	548	75	1.00	**KF127R77**	**4P**
3.0	11324	473	76	1.15	**KA127R77**	
3.5	9816	410	76	1.30	**KAF127R77**	
4.0	8715	364	62	0.90		
4.5	7613	318	62	1.05		
5.0	6847	286	62	1.15	**K107R77**	
5.7	6009	251	62	1.35	**KF107R77**	
6.5	5315	222	62	1.50	**KA107R77**	**4P**
7.3	4692	196	62	1.70	**KAF107R77**	
8.3	4166	174	62	1.90		
9.4	3687	154	62	2.15		
10	3352	140	62	2.40		
7.2	4764	199	38	0.90	**K97R57** **KF97R57** **KA97R57** **KAF97R57**	**4P**
					K127	
5.3	6809	135.09	78	1.80	**KF127**	**8P**
5.9	6159	122.20	78	2.00	**KA127**	
6.6	5527	109.66	78	2.20	**KAF127**	
6.4	5107	149.04	78	2.20	**K127**	
7.1	4619	135.09	78	2.40	**KF127**	**6P**
7.9	4145	122.20	78	2.70	**KA127**	
8.8	4249	109.66	78	3.00	**KAF127**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
4.0kW						
6.4	5666	112.41	62	1.35	**K107**	
7.1	5078	100.75	62	1.50	**KF107**	**8P**
7.9	4585	90.96	62	1.65	**KA107**	
8.7	4164	82.61	62	1.85	**KAF107**	
6.7	5423	143.47	62	1.40		
7.9	4591	121.46	62	1.65	**K107**	
8.5	4249	112.41	62	1.80	**KF107**	**6P**
9.5	3809	100.75	62	2.00	**KA107**	
11	3438	90.96	62	2.20	**KAF107**	
10	3616	143.47	62	2.10		
12	3061	121.46	62	2.50	**K107**	
13	2833	112.41	62	2.70	**KF107**	
14	2539	100.75	62	3.00	**KA107**	**4P**
16	2292	90.96	62	3.30	**KAF107**	
17	2082	82.61	62	3.60		
20	1847	73.30	62	4.10		
					K97	
9.4	3861	153.21	38	1.05	**KF97**	**4P**
10	3535	140.28	38	1.15	**KA97**	
12	3123	123.93	38	1.30	**KAF97**	
14	2649	105.13	38	1.50		
15	2439	96.80	38	1.65	**K97**	
17	2180	86.52	38	1.85	**KF97**	**4P**
18	1963	77.89	38	2.00	**KA97**	
20	1778	70.54	38	2.30	**KAF97**	
23	1576	62.55	38	2.60		
25	1425	56.55	38	2.85		
12	2919	115.82	25	0.85	**K87**	
14	2588	102.71	26	1.00	**KF87**	**4P**
17	2176	86.34	26	1.15	**KA87**	
18	1999	79.34	27	1.25	**KAF87**	
20	1776	70.46	27	1.40		
23	1588	63.00	27	1.60		
25	1427	56.64	27	1.75	**K87**	**4P**
29	1239	49.16	27	2.00	**KF87**	
33	1109	44.02	27	2.20	**KA87**	
39	920	36.52	26	2.50	**KAF87**	
46	791	31.38	26	2.90		
52	702	27.87	26	3.20		
22	1635	64.86	13	0.90		
25	1473	58.44	14	1.00	**K77**	
28	1292	51.26	16	1.15	**KF77**	**4P**
32	1140	45.24	17	1.30	**KA77**	
36	1011	40.10	17	1.45	**KAF77**	
37	969	38.45	17	1.45		
41	888	35.25	18	1.65		
47	779	30.93	18	1.85		
49	739	29.31	18	1.95	**K77**	
56	647	25.66	18	2.20	**KF77**	
62	582	23.11	19	2.50	**KA77**	**4P**
71	511	20.28	19	2.80	**KAF77**	
80	451	17.89	19	3.15		
91	400	15.86	19	3.55		
106	341	13.54	19	4.20		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
4.0kW						
48	761	30.21	10	1.00	**K67**	
53	687	27.27	10	1.10	**KF67**	4P
60	605	23.99	11	1.25	**KA67**	
64	571	22.66	11	1.30	**KAF67**	
75	486	19.29	12	1.45		
82	442	17.53	12	1.55		
95	383	15.19	12	1.70	**K67**	
109	333	13.22	12	1.90	**KF67**	
115	315	12.48	12	1.60	**KA67**	4P
135	268	10.63	12	1.75	**KAF67**	
149	243	9.66	12	1.85		
172	211	8.37	12	1.95		
198	183	7.28	11	2.10		
60	606	24.05	5.8	0.95		
63	572	22.71	5.9	1.00		
74	487	19.34	5.9	1.10		
82	443	17.57	5.9	1.15		
95	384	15.22	5.9	1.30	**K57**	
109	334	13.25	5.8	1.45	**KF57**	4P
121	300	11.92	5.5	1.30	**KA57**	
128	284	11.26	5.5	1.35	**KAF57**	
150	242	9.59	5.4	1.55		
165	220	8.71	5.4	1.65		
191	190	7.55	5.3	1.80		
219	166	6.57	5.1	1.95		
5.5kW						
0.9	53593	1628	153	0.80		
1.1	43651	1326	165	0.95		
1.2	41050	1247	171	1.05		
1.4	34137	1037	171	1.25	**K187R97**	4P
1.5	30780	935	171	1.45	**KA187R97**	
1.7	27850	846	171	1.60		
2.4	20081	610	171	2.00		
2.6	18369	558	171	2.40		
1.3	36014	1094	135	0.85		
1.6	30582	929	135	1.00		
1.7	27586	838	135	1.15		
1.9	24492	744	135	1.25	**K167R97**	4P
2.3	20673	628	135	1.50	**KA167R97**	
2.6	18139	551	135	1.70		
3.0	15571	473	135	2.00		
3.4	13826	420	135	2.30		
2.2	21891	665	104	0.80		
2.5	18764	570	106	0.95	**K157R97**	
2.8	16789	510	107	1.05	**KF157R97**	4P
3.3	14386	437	108	1.25	**KA157R97**	
3.8	12542	381	109	1.45	**KAF157R97**	
4.2	11193	340	109	1.60		
3.4	13925	423	74	0.95		
3.9	12147	369	76	1.05		
4.3	10962	333	76	1.20	**K127R87**	
5.0	9514	289	77	1.35	**KF127R87**	
5.7	8362	254	77	1.55	**KA127R87**	4P
6.7	7045	214	78	1.85	**KAF127R87**	
7.1	6650	202	78	1.95		
8.6	5530	168	78	2.35		
9.8	4839	147	78	2.70		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
5.5kW						
6.5	7308	222	62	1.10		
7.3	6452	196	62	1.25	**K107R77**	
8.3	5728	174	62	1.40	**KF107R77**	4P
9.4	5070	154	62	1.60	**KA107R77**	
10	4609	140	62	1.75	**KAF107R77**	
4.7	10565	152.45	109	1.60	**K157**	
5.8	8542	123.25	110	2.00	**KF157**	8P
7.2	6921	99.87	110	2.40	**KA157**	
7.8	6399	92.33	110	2.70	**KAF157**	
5.3	9362	135.09	77	1.30	**K127**	
5.9	8469	122.20	77	1.45	**KF127**	8P
6.6	7600	109.66	77	1.60	**KA127**	
8.1	6175	89.10	78	1.95	**KAF127**	
7.1	7022	135.09	78	1.75	**K127**	
7.9	6352	122.20	78	1.95	**KF127**	6P
8.8	5700	109.66	78	2.20	**KA127**	
11	4631	89.10	78	2.60	**KAF127**	
8.5	5843	112.41	62	1.30	**K107**	
9.5	5237	100.75	62	1.45	**KF107**	6P
11	4728	90.96	62	1.60	**KA107**	
12	4294	82.61	62	1.75	**KAF107**	
10	4972	143.47	62	1.80		
12	4209	121.46	62	1.80		
13	3895	112.41	62	1.95	**K107**	
14	3491	100.75	62	2.20	**KF107**	
16	3152	90.96	62	2.40	**KA107**	4P
17	2863	82.61	62	2.60	**KAF107**	
20	2540	73.30	62	2.90		
22	2305	66.52	62	3.20		
25	1981	57.17	62	3.70		
12	4294	123.93	38	0.95	**K97**	
14	3643	105.13	38	1.10	**KF97**	4P
15	3354	96.80	38	1.20	**KA97**	
17	2998	86.52	38	1.35	**KAF97**	
18	2699	77.89	38	1.50		
20	2444	70.54	38	1.65		
23	2167	62.55	38	1.85	**K97**	
25	1960	56.55	38	2.10	**KF97**	4P
30	1661	47.93	37	2.40	**KA97**	
34	1451	41.87	37	2.70	**KAF97**	
38	1327	38.29	37	3.00		
42	1186	34.22	37	3.30		
17	2992	86.34	25	0.85		
18	2749	79.34	26	0.95	**K87**	
20	2442	70.46	26	1.05	**KF87**	4P
23	2183	63.00	26	1.15	**KA87**	
25	1963	56.64	26	1.30	**KAF87**	
29	1703	49.16	26	1.50		
33	1525	44.02	25	1.60		
39	1265	36.52	25	1.85	**K87**	
46	1087	31.38	24	2.30	**KF87**	4P
52	966	27.87	23	2.50	**KA87**	
58	864	24.92	23	2.80	**KAF87**	
64	776	22.40	23	3.00		
74	674	19.44	23	3.30		

K.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
5.5kW						
32	1568	45.24	14	0.95		
36	1390	40.10	15	1.05	**K77**	
47	1072	30.93	17	1.35	**KF77**	**4P**
49	1016	29.31	17	1.45	**KA77**	
56	889	25.66	18	1.65	**KAF77**	
62	801	23.11	18	1.85		
71	703	20.28	18	2.00		
80	620	17.89	18	2.20		
91	550	15.86	18	2.40	**K77**	
106	469	13.54	18	2.70	**KF77**	**4P**
117	428	12.36	17	2.20	**KA77**	
133	376	10.84	17	2.50	**KAF77**	
150	332	9.57	17	2.80		
170	294	8.48	17	3.00		
199	251	7.24	17	3.30		
60	831	23.99	9.2	0.90		
64	785	22.66	10	0.95	**K67**	
75	668	19.29	11	1.05	**KF67**	**4P**
82	607	17.53	11	1.15	**KA67**	
95	526	15.19	11	1.25	**KAF67**	
109	458	13.22	12	1.40		
115	432	12.48	12	1.15		
135	368	10.63	12	1.30	**K67**	
149	335	9.66	12	1.35	**KF67**	**4P**
172	290	8.37	11	1.45	**KA67**	
198	252	7.28	11	1.55	**KAF67**	
82	609	17.57	4.8	0.85		
95	527	15.22	4.9	0.95		
109	459	13.25	5.0	1.05	**K57**	
121	413	11.92	4.7	0.95	**KF57**	
128	390	11.26	4.7	1.00	**KA57**	**4P**
150	332	9.59	4.7	1.15	**KAF57**	
165	302	8.71	4.7	1.20		
191	262	7.55	4.7	1.30		
219	228	6.57	4.7	1.45		
7.5kW						
1.7	37483	835	171	1.30	**K187R107**	
2.0	32680	728	171	1.50	**KA187R107**	**4P**
2.4	26575	592	171	1.75		
1.3	48167	1073	163	0.90		
1.5	41972	935	171	1.05		
1.7	37977	846	171	1.15	**K187R97**	**4P**
2.4	27383	610	171	1.45	**KA187R97**	
2.6	25049	558	171	1.75		
3.0	21233	473	171	2.10		
1.7	37618	838	135	0.85		
1.9	33398	744	135	0.90		
2.3	28191	628	135	1.10	**K167R97**	
2.6	24734	551	135	1.25	**KA167R97**	**4P**
3.0	21233	473	135	1.45		
3.4	18854	420	135	1.65		
4.0	16250	362	135	1.90		
3.3	19617	437	106	0.95	**K157R97**	
3.8	17103	381	107	1.05	**KF157R97**	**4P**
4.2	15263	340	108	1.20	**KA157R97**	
4.9	13153	293	108	1.40	**KAF157R97**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
7.5kW						
4.3	14948	333	72	0.90		
5.0	12973	289	75	1.00		
5.7	11402	254	76	1.15	**K127R87**	
6.7	9606	214	77	1.35	**KF127R87**	**4P**
7.1	9068	202	77	1.45	**KA127R87**	
8.6	7542	168	78	1.75	**KAF127R87**	
9.8	6599	147	78	2.00		
4.5	15109	159.88	135	1.95	**K167**	
5.0	13699	144.96	135	2.20	**KA167**	**8P**
5.6	12252	129.64	135	2.40		
6.1	11215	159.88	135	2.60	**K167**	
6.7	10169	144.96	135	2.95	**KA167**	**6P**
7.5	9094	129.64	135	3.20		
6.4	10694	152.45	109	1.60		
7.9	8646	123.25	110	1.95	**K157**	
9.7	7006	99.87	110	2.40	**KF157**	**6P**
11	6477	92.33	110	2.60	**KA157**	
12	5664	80.75	110	3.00	**KAF157**	
7	9476	135.09	77	1.30	**K127**	
8	8572	122.20	77	1.40	**KF127**	**6P**
9	7692	109.66	77	1.60	**KA127**	
11	6250	89.10	78	1.95	**KAF127**	
9.7	7043	149.04	78	1.80		
11	6383	135.09	78	1.90	**K127**	
12	5774	122.20	78	2.10	**KF127**	
13	5182	109.66	78	2.40	**KA127**	**4P**
16	4210	89.10	78	2.90	**KAF127**	
18	3838	81.23	78	3.20		
20	3346	70.82	78	3.70		
					K107	
10	6779	143.47	62	1.10	**KF107**	**4P**
12	5739	121.46	62	1.30	**KA107**	
13	5312	112.41	62	1.40	**KAF107**	
14	4761	100.75	62	1.60		
16	4298	90.96	61	1.75		
17	3904	82.61	60	1.95	**K107**	
20	3464	73.30	59	2.20	**KF107**	**4P**
22	3143	66.52	58	2.40	**KA107**	
25	2701	57.17	56	2.80	**KAF107**	
29	2358	49.90	55	3.10		
34	2000	42.33	53	3.50		
39	1748	37.00	51	3.90		
15	4574	96.80	36	0.90		
17	4088	86.52	36	1.00	**K97**	
18	3681	77.89	36	1.10	**KF97**	**4P**
20	3333	70.54	36	1.20	**KA97**	
23	2956	62.55	36	1.35	**KAF97**	
25	2672	56.55	35	1.50		
30	2265	47.93	35	1.80		
34	1978	41.87	34	2.00	**K97**	
38	1809	38.29	33	2.20	**KF97**	**4P**
42	1617	34.22	33	2.50	**KA97**	
47	1456	30.81	17	2.75	**KAF97**	
52	1318	27.90	17	3.00		
58	1169	24.74	17	3.30		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
7.5kW						
23	2977	63.00	23	0.85		
25	2676	56.64	23	0.95	**K87**	
29	2323	49.16	23	1.10	**KF87**	**4P**
33	2080	44.02	23	1.20	**KA87**	
39	1726	36.52	23	1.35	**KAF87**	
46	1483	31.38	22	1.70		
52	1317	27.87	22	1.85		
58	1178	24.92	22	2.00	**K87**	
64	1058	22.40	21	2.00	**KF87**	**4P**
74	919	19.44	21	2.40	**KA87**	
83	823	17.41	20	2.50	**KAF87**	
90	756	16.00	20	2.20		
100	683	14.45	20	2.90		
115	593	12.56	20	3.30		
47	1462	30.93	15	1.00		
49	1385	29.31	15	1.05	**K77**	
56	1213	25.66	16	1.20	**KF77**	**4P**
62	1092	23.11	17	1.35	**KA77**	
71	958	20.28	17	1.50	**KAF77**	
80	845	17.89	18	1.60		
91	749	15.86	17	1.75		
106	640	13.54	17	2.00	**K77**	
117	584	12.36	16	1.60	**KF77**	**4P**
133	512	10.84	16	1.80	**KA77**	
150	452	9.57	15	1.95	**KAF77**	
170	401	8.48	15	2.10		
199	342	7.24	15	2.30		
11.0kW						
1.7	54222	835	162	0.90		
2.0	47274	728	171	1.05		
2.5	38443	592	171	1.20	**K187R107**	**4P**
3.2	29222	450	171	1.45	**KA187R107**	
3.7	25520	393	171	1.65		
4.1	23053	355	171	2.10		
2.4	39611	610	171	1.00	**K187R97**	
2.6	36235	558	171	1.20	**KA187R97**	**4P**
3.1	30715	473	171	1.40		
4.9	19481	300	135	1.50		
5.6	17013	262	135	1.70	**K167R107**	
6.1	15650	241	135	1.95	**KA167R107**	**4P**
6.9	13702	211	135	2.30		
7.5	12598	194	135	2.30		
2.6	35780	551	135	0.85		
3.1	30715	473	135	1.00	**K167R97**	**4P**
3.5	27273	420	135	1.15	**KA167R97**	
4.0	23507	362	135	1.30		
					K157R97	
4.3	22078	340	104	0.80	**KF157R97**	**4P**
5.0	19026	293	106	0.95	**KA157R97**	
					KAF157R97	
6.8	13896	214	74	0.95	**K127R87**	
7.2	13117	202	75	1.00	**KF127R87**	**4P**
8.7	10909	168	76	1.20	**KA127R87**	
9.9	9546	147	77	1.35	**KAF127R87**	
5.6	17723	129.64	135	1.60	**K167**	
6.3	15951	116.68	135	1.85	**KA167**	**8P**
6.7	14859	108.69	135	2.00		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
11.0kW						
6.1	16449	159.88	135	1.80	**K167**	
6.7	14914	144.96	135	2.05	**KA167**	**6P**
7.5	13338	129.64	135	2.20		
9.1	10929	159.88	135	2.70	**K167**	
10	9909	144.96	135	3.05	**KA167**	**4P**
11	8861	129.64	135	3.30		
5.9	16849	123.25	107	1.00	**K157**	
7.3	13653	99.87	108	1.25	**KF157**	**8P**
7.9	12622	92.33	108	1.35	**KA157**	
9.0	11039	80.75	109	1.55	**KAF157**	
6.4	15685	152.45	107	1.10		
7.9	12680	123.25	108	1.35	**K157**	
9.7	10275	99.87	109	1.65	**KF157**	**6P**
10.5	9499	92.33	110	1.80	**KA157**	
12.0	8308	80.75	110	2.10	**KAF157**	
9.6	10421	152.45	109	1.65	**K157**	
12	8425	123.25	110	2.00	**KF157**	**4P**
15	6827	99.87	110	2.50	**KA157**	
16	6311	92.33	110	2.70	**KAF157**	
11	9234	135.09	77	1.30		
12	8353	122.20	77	1.45		
13	7496	109.66	77	1.60	**K127**	**4P**
16	6090	89.10	78	2.00	**KF127**	
18	5552	81.23	78	2.20	**KA127**	
21	4841	70.82	78	2.50	**KAF127**	
23	4259	62.31	78	2.80		
28	3620	52.96	78	3.20		
13	7684	112.41	55	1.00	**K107**	
14	6887	100.75	55	1.10	**KF107**	**4P**
16	6218	90.96	55	1.20	**KA107**	
18	5647	82.61	55	1.35	**KAF107**	
20	5010	73.30	54	1.50		
22	4547	66.52	53	1.65		
26	3908	57.17	52	1.90	**K107**	**4P**
29	3411	49.90	51	2.20	**KF107**	
34	2893	42.33	50	2.40	**KA107**	
39	2529	37.00	49	2.70	**KAF107**	
45	2234	32.68	49	3.00		
47	2138	31.28	48	3.00		
50	1982	28.99	48	3.20		
21	4822	70.54	31	0.85	**K97**	
23	4276	62.55	31	0.95	**KF97**	**4P**
26	3865	56.55	31	1.05	**KA97**	
30	3276	47.93	31	1.25	**KAF97**	
35	2862	41.87	31	1.40		
38	2617	38.29	30	1.55		
43	2339	34.22	30	1.70		
47	2106	30.81	30	1.90	**K97**	
52	1907	27.90	29	2.10	**KF97**	**4P**
59	1691	24.74	29	2.40	**KA97**	
65	1529	22.37	28	2.60	**KAF97**	
77	1296	18.96	28	3.00		
88	1132	16.56	28	3.30		
105	947	13.85	28	3.80		
33	3009	44.02	19	0.80		
40	2496	36.52	19	0.95	**K87**	
47	2145	31.38	20	1.20	**KF87**	**4P**
52	1905	27.87	20	1.30	**KA87**	
59	1703	24.92	19	1.40	**KAF87**	

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
11.0kW						
65	1531	22.40	19	1.40		
75	1329	19.44	19	1.60		
84	1190	17.41	19	1.75		
91	1094	16.00	18	1.55	**K87**	
101	988	14.45	18	2.00	**KF87**	**4P**
116	859	12.56	18	2.20	**KA87**	
131	763	11.16	17	1.85	**KAF87**	
146	684	10.00	17	2.10		
176	567	8.29	16	2.30		
202	493	7.21	16	2.50		
63	1580	23.11	14	0.90		
72	1386	20.28	15	1.00		
82	1223	17.89	16	1.10		
92	1084	15.86	16	1.20	**K77**	
108	926	13.54	15	1.35	**KF77**	**4P**
118	845	12.36	15	1.10	**KA77**	
135	741	10.84	15	1.25	**KAF77**	
153	654	9.57	14	1.35		
172	580	8.48	14	1.45		
202	495	7.24	14	1.55		
15.0kW						
2.5	52422	592	161	0.90		
3.2	39848	450	171	1.05	**K187R107**	
3.7	34800	393	171	1.20	**KA187R107**	**4P**
4.1	31435	355	171	1.55		
6.5	20012	226	171	2.10		
4.9	26565	300	135	1.10		
5.6	23200	262	135	1.30		
6.1	21341	241	135	1.45	**K167R107**	
6.9	18684	211	135	1.65	**KA167R107**	**4P**
7.5	17179	194	135	1.75		
8.2	15762	178	135	1.95		
9.7	13371	151	135	2.20		
6.2	20809	235	105	0.85		
6.8	19127	216	106	0.95	**K157R107**	
7.7	16825	190	107	1.05	**KF157R107**	**4P**
9.2	14079	159	108	1.30	**KA157R107**	
12	10980	124	109	1.65	**KAF157R107**	
14	9563	108	110	1.90		
5.5	24804	176.80	171	1.90	**K187**	**6P**
6.0	22532	160.60	171	2.10	**KA187**	
7.5	18188	129.64	135	1.60	**K167**	
8.3	16370	116.68	135	1.85	**KA167**	**6P**
8.9	15249	108.69	135	1.95		
9.1	14903	159.88	135	2.00	**K167**	
10	13512	144.96	135	2.25	**KA167**	**4P**
11	12084	129.64	135	2.40		
7.9	17292	123.25	107	1.00	**K157**	
9.7	14011	99.87	108	1.20	**KF157**	
11	12954	92.33	108	1.35	**KA157**	**6P**
12	11329	80.75	109	1.55	**KAF157**	
14	9540	68.00	109	1.75		
9.6	14210	152.45	108	1.20		
12	11488	123.25	109	1.50	**K157**	
15	9309	99.87	108	1.85	**KF157**	
16	8606	92.33	107	2.00	**KA157**	**4P**
18	7527	80.75	104	2.30	**KAF157**	
21	6338	68.00	104	2.70		
24	5719	61.36	104	3.00		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
15.0kW						
					K127	
11	12592	135.09	75	0.95	**KF127**	**4P**
12	11390	122.20	76	1.10	**KA127**	
13	10221	109.66	76	1.20	**KAF127**	
16	8305	89.10	77	1.45		
18	7571	81.23	77	1.60	**K127**	
21	6601	70.82	78	1.85	**KF127**	**4P**
23	5808	62.31	76	2.10	**KA127**	
28	4936	52.96	74	2.50	**KAF127**	
31	4348	46.65	72	2.80		
36	3768	40.42	72	3.20		
16	8478	90.96	48	0.90	**K107**	
18	7700	82.61	49	1.00	**KF107**	**4P**
20	6832	73.30	49	1.10	**KA107**	
22	6200	66.52	48	1.25	**KAF107**	
26	5329	57.17	48	1.45		
29	4651	49.90	48	1.60		
34	3946	42.33	47	1.75	**K107**	
39	3449	37.00	46	2.00	**KF107**	
45	3046	32.68	45	2.20	**KA107**	**4P**
47	2915	31.28	44	2.20		
50	2702	28.99	44	2.50	**KAF107**	
55	2452	26.31	44	2.70		
65	2107	22.61	44	3.20		
30	4468	47.93	27	0.90		
35	3903	41.87	27	1.05	**K97**	
38	3569	38.29	27	1.15	**KF97**	**4P**
43	3190	34.22	27	1.30	**KA97**	
47	2872	30.81	27	1.40	**KAF97**	
52	2601	27.90	27	1.55		
59	2306	24.74	27	1.75		
65	2085	22.37	26	1.95	**K97**	
77	1767	18.96	26	2.30	**KF97**	
88	1544	16.56	25	2.70	**KA97**	**4P**
105	1291	13.85	25	3.00	**KAF97**	
122	1118	11.99	25	3.30		
140	970	10.41	25	3.80		
168	812	8.71	25	4.50		
47	2925	31.38	16	0.90		
52	2598	27.87	17	0.95	**K87**	
59	2323	24.92	17	1.00	**KF87**	**4P**
65	2088	22.40	17	1.05	**KA87**	
75	1812	19.44	17	1.20	**KAF87**	
84	1623	17.41	17	1.30		
91	1491	16.00	16	1.15		
101	1347	14.45	17	1.50	**K87**	
116	1171	12.56	17	1.60	**KF87**	
131	1040	11.16	16	1.35	**KA87**	**4P**
146	932	10.00	16	1.55	**KAF87**	
176	773	8.29	15	1.70		
202	672	7.21	15	1.85		
18.5kW						
3.3	48811	450	159	0.85		
3.7	42628	393	171	1.00	**K187R107**	
4.1	38506	355	171	1.25	**KA187R107**	**4P**
6.5	24514	226	171	1.70		
7.7	20718	191	171	2.00		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
18.5kW						
4.9	32541	300	135	0.90		
5.6	28419	262	135	1.05		
6.1	26141	241	135	1.20		
7.0	22887	211	135	1.35	**K167R107**	
7.6	21043	194	135	1.40	**KA167R107**	**4P**
8.3	19307	178	135	1.60		
9.7	16379	151	135	1.80		
11	13884	128	135	2.10		
13	12149	112	135	2.40		
7.7	20609	190	105	0.90	**K157R107**	
9.2	17247	159	107	1.05	**KF157R107**	**4P**
12	13450	124	108	1.35	**KA157R107**	
14	11715	108	107	1.55	**KAF157R107**	
5.5	30592	176.80	171	1.55		
6.0	27789	160.60	171	1.65	**K187**	**6P**
6.7	24868	143.72	171	1.90	**KA187**	
7.3	23013	133.00	171	2.10		
8.3	20187	176.80	171	2.30		
9.2	18337	160.60	171	2.50	**K187**	**4P**
10	16410	143.72	171	2.90	**KA187**	
11	15186	133.00	171	3.20		
10	16551	144.96	135	1.70		
11	14802	129.64	135	1.95		
13	13322	116.68	135	2.25	**K167**	**4P**
14	12410	108.69	135	2.40	**KA167**	
15	11034	96.64	135	2.70		
17	9786	85.71	135	3.00		
9.7	15976	99.87	106	1.00	**K157**	
11	13972	92.33	107	1.10	**KF157**	**6P**
12	11766	80.75	106	1.25	**KA157**	
14	21326	68.00	104	1.40	**KAF157**	
12	14072	123.25	106	1.20		
15	11403	99.87	104	1.50		
16	10542	92.33	102	1.65		
18	9220	80.75	100	1.85	**K157**	
22	7764	68.00	98	2.10	**KF157**	**4P**
24	7006	61.36	96	2.50	**KA157**	
27	6262	54.84	94	2.80	**KAF157**	
31	5445	47.69	91	3.20		
38	4418	38.69	87	3.90		
					K127	
13	12521	109.66	75	1.00	**KF127**	**4P**
16	10173	89.10	75	1.20	**KA127**	
18	9275	81.23	75	1.30	**KAF127**	
21	8086	70.82	74	1.50		
24	7114	62.31	73	1.70		
28	6047	52.96	71	2.00	**K127**	
32	5326	46.65	70	2.20	**KF127**	**4P**
36	4615	40.42	68	2.70	**KA127**	
41	4142	36.28	66	3.00	**KAF127**	
46	3611	31.63	65	3.40		
53	3178	27.83	63	3.90		
20	8369	73.30	44	0.90	**K107**	
22	7595	66.52	44	1.00	**KF107**	**4P**
26	6528	57.17	44	1.15	**KA107**	
29	5697	49.90	44	1.30	**KAF107**	
18.5kW						
35	4833	42.33	44	1.45		
40	4225	37.00	43	1.60		
45	3731	32.68	43	1.85	**K107**	
47	3548	31.28	43	1.80		
51	3310	28.99	42	2.10	**KF107**	**4P**
56	3004	26.31	42	2.30	**KA107**	
65	2582	22.61	41	2.60	**KAF107**	
74	2254	19.74	40	3.00		
88	1911	16.74	38	3.50		
35	4781	41.87	24	0.85	**K97**	
48	3518	30.81	25	1.15	**KF97**	**4P**
53	3186	27.90	25	1.30	**KA97**	
59	2825	24.74	25	1.45	**KAF97**	
66	2554	22.37	25	1.60		
78	2165	18.96	24	1.90	**K97**	
89	1891	16.56	24	2.20	**KF97**	
106	1581	13.85	24	2.60	**KA97**	**4P**
123	1369	11.99	23	2.70	**KAF97**	
141	1189	10.41	23	3.00		
169	994	8.71	23	3.50		
59	2845	24.92	15	0.85		
66	2558	22.40	15	0.85		
76	2220	19.44	15	1.00		
84	1988	17.41	16	1.05	**K87**	
102	1650	14.45	16	1.20	**KF87**	**4P**
117	1434	12.56	16	1.30	**KA87**	
132	1274	11.16	15	1.10	**KAF87**	
147	1142	10.00	15	1.25		
177	947	8.29	14	1.40		
204	823	7.21	14	1.50		
22kW						
3.7	50693	393	155	0.85		
4.1	45791	355	171	1.05		
6.5	29152	226	171	1.45	**K187R107**	**4P**
7.7	24637	191	171	1.70	**KA187R107**	
8.8	21541	167	171	1.95		
10	18188	141	171	2.30		
5.6	33795	262	135	0.85		
6.1	31087	241	135	1.00		
7.0	27217	211	135	1.15		
7.6	25024	194	135	1.20	**K167R107**	**4P**
8.3	22960	178	135	1.35	**KA167R107**	
9.7	19477	151	135	1.50		
11	16511	128	135	1.80		
13	14447	112	135	2.10		
					K157R107	
9.2	20509	159	104	0.90	**KF157R107**	**4P**
12	15995	124	103	1.15	**KA157R107**	
14	13931	108	102	1.30	**KAF157R107**	
5.5	36380	176.80	171	1.30		
6.0	33046	160.60	171	1.40		
6.7	29573	143.72	171	1.60	**K187**	**6P**
7.3	27367	133.00	171	1.80	**KA187**	
8.2	24410	118.63	171	1.90		
9.6	20890	101.52	171	2.10		
8.3	24006	176.80	171	1.95		
9.2	21806	160.60	171	2.10	**K187**	
10	19514	143.72	171	2.40	**KA187**	**4P**
11	18059	133.00	171	2.70		

K.

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
22kW						
11	17602	129.64	135	1.65		
13	15843	116.68	135	1.90		
14	14758	108.69	135	2.00	**K167**	**4P**
15	13122	96.64	135	2.20	**KA167**	
17	11638	85.71	135	2.50		
19	10402	76.61	135	2.90		
9.7	20550	99.87	101	0.85		
11	18999	92.33	101	0.90	**K157**	
12	16616	80.75	100	1.05	**KF157**	**6P**
14	13992	68.00	99	1.20	**KA157**	
16	12626	61.36	98	1.35	**KAF157**	
12	16735	123.25	100	1.05		
15	13560	99.87	99	1.25		
16	12536	92.33	98	1.35	**K157**	
18	10964	80.75	97	1.55	**KF157**	
22	9233	68.00	95	1.80	**KA157**	**4P**
24	8331	61.36	93	2.10	**KAF157**	
27	7446	54.84	91	2.30		
31	6475	47.69	89	2.70		
38	5253	38.69	85	3.30		
16	12098	89.10	70	1.00	**K127**	
18	11029	81.23	70	1.10	**KF127**	**4P**
21	9616	70.82	70	1.30	**KA127**	
24	8460	62.31	69	1.45	**KAF127**	
28	7191	52.96	67	1.70		
32	6334	46.65	67	1.90		
36	5488	40.42	66	2.30	**K127**	
41	4926	36.28	64	2.50	**KF127**	**4P**
46	4295	31.63	63	2.90	**KA127**	
53	3779	27.83	61	3.30	**KAF127**	
62	3211	23.65	60	3.80		
71	2828	20.83	58	4.30		
					K107	
26	7762	57.17	41	1.00	**KF107**	**4P**
29	6775	49.90	41	1.10	**KA107**	
35	5748	42.33	41	1.20	**KAF107**	
40	5024	37.00	41	1.35		
45	4437	32.68	41	1.55		
47	4220	31.28	41	1.50		
51	3936	28.99	40	1.75		
56	3572	26.31	40	1.90		
65	3070	22.61	39	2.20	**K107**	
74	2680	19.74	38	2.50	**KF107**	**4P**
88	2273	16.74	37	2.90	**KA107**	
100	1986	14.63	36	3.30	**KAF107**	
109	1824	13.43	35	2.20		
125	1591	11.72	34	2.60		
148	1350	9.94	33	2.90		
169	1180	8.69	32	3.20		
48	4183	30.81	22	0.95	**K97**	
53	3788	27.90	23	1.05	**KF97**	**4P**
59	3359	24.74	23	1.20	**KA97**	
66	3037	22.37	23	1.35	**KAF97**	
78	2574	18.96	23	1.60		
89	2248	16.56	23	1.80	**K97**	
106	1881	13.85	23	2.20	**KF97**	**4P**
123	1628	11.99	22	2.30	**KA97**	
141	1413	10.41	21	1.90	**KAF97**	
169	1183	8.71	20	2.10		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
22kW						
76	2640	19.44	14	0.80		
84	2364	17.41	14	0.90		
102	1962	14.45	14	1.00	**K87**	
117	1705	12.56	15	1.10	**KF87**	**4P**
132	1515	11.16	13	0.95	**KA87**	
147	1358	10.00	13	1.05	**KAF87**	
177	1126	8.29	14	1.20		
204	979	7.21	13	1.25		
30kW						
6.5	39752	226	171	1.05		
7.7	33596	191	171	1.25	**K187R107**	**4P**
8.8	29375	167	171	1.45	**KA187R107**	
10	24801	141	171	1.70		
7.0	37114	211	135	0.85		
7.6	34124	194	135	0.85		
8.3	31309	178	135	1.00	**K167R107**	**4P**
9.7	26560	151	135	1.10	**KA167R107**	
11	22515	128	135	1.30		
13	19700	112	135	1.50		
8.3	32735	176.80	171	1.45		
9.2	29736	160.60	171	1.55		
10	26610	143.72	171	1.75		
11	24625	133.00	171	2.00	**K187**	**4P**
12	21965	118.63	171	2.22	**KA187**	
14	18797	101.52	171	2.30		
16	16842	90.96	171	2.50		
20	13566	73.27	171	2.90		
13	21604	116.68	135	1.30		
14	20124	108.69	135	1.50		
15	17893	96.64	135	1.70		
17	15869	85.71	135	1.85	**K167**	**4P**
19	14185	76.61	135	2.10	**KA167**	
22	12524	67.64	135	2.40		
24	11172	60.34	135	2.70		
29	9426	50.91	135	3.20		
15	18491	99.87	88	0.90		
16	17095	92.33	88	1.00		
18	14951	80.75	88	1.15	**K157**	
22	12590	68.00	87	1.30	**KF157**	
24	11361	61.36	86	1.50	**KA157**	**4P**
27	10154	54.84	85	1.70	**KAF157**	
31	8830	47.69	83	1.95		
38	7164	38.69	81	2.40		
47	5840	31.54	78	3.00		
21	13113	70.82	61	0.95		
24	11537	62.31	61	1.05		
28	9806	52.96	61	1.25		
32	8637	46.65	61	1.40	**K127**	
36	7484	40.42	61	1.65	**KF127**	
41	6717	36.28	60	1.85	**KA127**	**4P**
46	5856	31.63	59	2.10	**KAF127**	
53	5153	27.83	58	2.40		
62	4379	23.65	57	2.80		
71	3857	20.83	56	3.00		
81	3342	18.05	56	3.50		
35	7838	42.33	34	0.90	**K107** **KF107**	**4P**
40	6851	37.00	36	1.00	**KA107**	
47	5792	31.28	34	1.10	**KAF107**	

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
30kW						
51	5368	28.99	36	1.25		
56	4871	26.31	36	1.40		
65	4186	22.61	36	1.65		
74	3655	19.74	36	1.85	**K107**	
88	3099	16.74	35	2.20	**KF107**	
100	2709	14.63	34	2.40	**KA107**	**4P**
109	2487	13.43	33	1.65	**KAF107**	
125	2170	11.72	32	1.90		
148	1840	9.94	31	2.20		
169	1609	8.69	31	2.40		
59	4581	24.74	19	0.90		
66	4142	22.37	19	1.00		
78	3511	18.96	20	1.15	**K97**	
89	3066	16.56	20	1.35	**KF97**	
106	2564	13.85	20	1.60	**KA97**	**4P**
123	2220	11.99	20	1.65	**KAF97**	
141	1927	10.41	19	1.40		
169	1613	8.71	18	1.55		
37kW						
6.5	48697	226	158	0.85		
7.7	41155	191	171	1.00	**K187R107**	
8.9	35984	167	171	1.15	**KA187R107**	**4P**
10	30382	141	171	1.40		
8.3	38354	178	135	0.80		
10	32536	151	135	9.00	**K167R107**	
12	27580	128	135	1.05	**KA167R107**	**4P**
13	24133	112	135	1.20		
8.4	40100	176.80	171	1.15		
9.2	36426	160.60	171	1.25		
10	32597	143.72	171	1.45		
11	30166	133.00	171	1.60	**K187**	
12	26904	118.62	171	1.75	**KA187**	**4P**
15	23026	101.52	171	1.85		
16	20631	90.96	171	2.00		
20	16619	73.27	171	2.40		
22	15178	66.92	171	2.60		
14	24652	108.69	135	1.20		
15	21919	96.64	135	1.35		
17	19440	85.71	135	1.50		
19	17376	76.61	135	1.70	**K167**	
22	15342	67.64	135	1.95	**KA167**	**4P**
25	13686	60.34	135	2.20		
29	11547	50.91	135	2.60		
36	9218	40.64	135	3.20		
16	20942	92.33	79	0.80	**K157** **KF157**	**4P**
18	18315	80.75	80	0.95	**KA157** **KAF157**	
22	15423	68.00	81	1.05		
24	13917	61.36	80	1.25	**K157**	
27	12438	54.84	80	1.40	**KF157**	
31	10817	47.69	79	1.60	**KA157**	**4P**
38	8775	38.69	77	1.95	**KAF157**	
47	7154	31.54	75	2.40		
56	6024	26.56	75	2.80		
24	14133	62.31	55	0.85	**K127**	
28	12012	52.96	56	1.00	**KF127**	**4P**
32	10581	46.65	56	1.15	**KA127**	
37	9168	40.42	56	1.35	**KAF127**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
37kW						
41	8229	36.28	56	1.50		
47	7174	31.63	56	1.70		
53	6312	27.83	55	1.95		
63	5364	23.65	54	2.30	**K127**	
71	4725	20.83	53	2.60	**KF127**	**4P**
82	4094	18.05	52	3.00	**KA127**	
103	3257	14.36	50	3.50	**KAF127**	
115	2919	12.87	48	2.80		
133	2529	11.15	46	3.10		
167	2012	8.87	44	3.50		
40	8392	37.00	28	0.80		
47	7096	31.28	30	0.90		
51	6575	28.99	32	1.05		
56	5967	26.31	33	1.15		
65	5128	22.61	33	1.30	**K107**	
75	4477	19.74	33	1.50	**KF107**	
88	3797	16.74	33	1.75	**KA107**	**4P**
101	3318	14.63	32	1.95	**KAF107**	
110	3046	13.43	31	1.35		
126	2658	11.72	30	1.55		
149	2255	9.94	30	1.75		
170	1971	8.69	29	1.95		
45kW						
7.7	50054	191	155	0.85	**K187R107**	
8.9	43764	167	167	0.95	**KA187R107**	**4P**
10	36951	141	171	1.15		
12	33544	128	135	0.85	**K167R107**	
13	29351	112	135	1.00	**KA167R107**	**4P**
8	46332	176.80	167	0.95		
9	42087	160.60	171	1.05		
10	37663	143.72	171	1.20		
11	34854	133.00	171	1.30		
12	31086	118.62	171	1.45	**K187**	
15	26604	101.52	171	1.50	**KA187**	**4P**
16	23837	90.96	171	1.65		
20	19201	73.27	171	1.95		
22	17537	66.92	169	2.30		
24	15873	60.57	160	2.50		
28	14091	53.77	160	2.80		
14	28483	108.69	135	1.00		
15	25326	96.64	135	1.10		
17	22461	85.71	135	1.25		
19	20076	76.61	135	1.40		
22	17726	67.64	135	1.60	**K167**	
25	15813	60.34	134	1.80	**KA167**	**4P**
29	13341	50.91	130	2.10		
36	10650	40.64	127	2.60		
41	9487	36.20	120	2.80		
44	8847	33.76	120	3.00		
22	18758	68.00	73	0.85		
24	16926	61.36	74	1.00		
27	15128	54.84	74	1.15		
31	13155	47.69	74	1.30	**K157**	
38	10673	38.69	73	1.60	**KF157**	
47	8700	31.54	72	1.95	**KA157**	**4P**
56	7327	26.56	71	2.20	**KAF157**	
62	6612	23.97	69	2.60		
69	5909	21.42	68	2.90		
79	5136	18.62	66	3.30		

选型参数表 (恒功率)

Selection Table (Constant Power)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
45kW						
					K127	
32	12869	46.65	50	0.95	**KF127**	**4P**
37	11150	40.42	51	1.10	**KA127**	
41	10008	36.28	51	1.25	**KAF127**	
47	8725	31.63	52	1.40		
53	7677	27.83	51	1.60		
63	6524	23.65	51	1.85		
71	5746	20.83	51	2.10	**K127**	
82	4979	18.05	50	2.50	**KF127**	**4P**
103	3961	14.36	48	2.90	**KA127**	
115	3550	12.87	46	2.30	**KAF127**	
133	3076	11.15	45	2.50		
167	2447	8.87	43	2.80		
51	7997	28.99	24	0.85	**K107**	
56	7258	26.31	27	0.95	**KF107**	**4P**
65	6237	22.61	29	1.10	**KA107**	
75	5445	19.74	30	1.25	**KAF107**	
88	4618	16.74	30	1.45		
101	4036	14.63	30	1.60	**K107**	
110	3705	13.43	28	1.10	**KF107**	**4P**
126	3233	11.72	28	1.25	**KA107**	
149	2742	9.94	28	1.45	**KAF107**	
170	2397	8.69	28	1.60		
55kW						
10	48456	143.72	169	0.95		
11	44841	133.00	171	1.10		
12	39993	118.62	171	1.15		
15	34228	101.52	170	1.25		
16	30668	90.96	168	1.35	**K187**	**4P**
20	24703	73.27	166	1.60	**KA187**	
22	22562	66.92	162	1.90		
24	20421	60.57	159	2.20		
28	18129	53.77	150	2.50		
34	14727	43.68	150	3.00		
17	28897	85.71	131	1.00		
19	25829	76.61	130	1.15		
22	22805	67.64	129	1.30		
25	20344	60.34	128	1.50		
29	17164	50.91	125	1.75	**K167**	
36	13702	40.64	121	2.10	**KA167**	**4P**
41	12205	36.20	119	2.50		
44	11382	33.76	118	2.70		
49	10155	30.12	118	3.00		
58	8567	25.41	118	3.50		
24	20688	61.36	66	0.85		
27	18490	54.84	67	0.95		
31	16079	47.69	68	1.10		
38	13044	38.69	68	1.35	**GK157**	
47	10634	31.54	67	1.60	**GKF157**	
56	8955	26.56	67	1.85	**GKA157**	**4P**
62	8082	23.97	66	2.10	**GKAF157**	
69	7222	21.42	65	2.40		
79	6278	18.62	64	2.80		
98	5094	15.11	62	3.40		
113	4396	13.04	60	3.80		
					K127	
37	13628	40.42	45	0.90	**KF127**	**4P**
48	10327	31.63	47	1.15	**KA127**	
53	9383	27.83	47	1.30	**KAF127**	

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
55kW						
63	7974	23.65	47	1.55		
71	7023	20.83	47	1.75	**K127**	
82	6086	18.05	47	2.00	**KF127**	
103	4842	14.36	46	2.40	**KA127**	**4P**
115	4339	12.87	44	1.85	**KAF127**	
133	3759	11.15	43	2.10		
167	2991	8.87	41	2.30		
75kW						
11	61147	133.00	148	0.80		
12	54536	118.62	148	0.85		
15	46674	101.52	149	0.90		
16	41819	90.96	150	1.00		
20	33686	73.27	150	1.15	**K187**	
22	30767	66.92	149	1.40	**KA187**	**4P**
24	27847	60.57	147	1.60		
28	24721	53.77	144	1.95		
34	20082	43.68	141	2.30		
37	18312	39.83	140	2.50		
41	16409	35.69	140	2.80		
19	35222	76.61	113	0.85		
22	31098	67.64	114	0.95		
25	27742	60.34	115	1.10		
29	23406	50.91	114	1.30		
36	18684	40.64	113	1.55	**K167**	
41	16643	36.20	111	1.80	**KA167**	**4P**
44	15521	33.76	109	2.10		
49	13848	30.12	107	2.30		
58	11682	25.41	105	2.70		
73	9324	20.28	100	3.20		
82	8308	18.07	100	3.60		
38	17788	38.69	58	1.00		
47	14501	31.54	59	1.20		
56	12211	26.56	59	1.35	**K157**	
62	11020	23.97	59	1.55	**KF157**	**4P**
69	9848	21.42	59	1.75	**KA157**	
79	8561	18.62	59	2.00	**KAF157**	
98	6947	15.11	57	2.50		
113	5995	13.04	56	2.80		
47	14542	31.63	37	0.85		
53	12795	27.83	39	0.95		
63	10873	23.65	40	1.10	**K127**	
71	9577	20.83	41	1.25	**KF127**	
82	8299	18.05	41	1.50	**KA127**	**4P**
103	6602	14.36	42	1.75	**KAF127**	
115	5917	12.87	39	1.40		
133	5126	11.15	39	1.55		
167	4078	8.87	38	1.70		
90kW						
16	49846	90.96	136	0.85		
20	40152	73.27	138	1.00		
22	36672	66.92	139	1.15		
25	33193	60.57	138	1.35	**K187**	
28	29466	53.77	137	1.60	**KA187**	**4P**
34	23937	43.68	134	1.90		
37	21827	39.83	134	2.00		
42	19558	35.69	132	2.20		
52	15755	28.75	130	2.70		

K.

选型参数表 (恒扭矩)

Selection Table (Constant Torque)

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
90kW						
22	37067	67.64	104	0.80		
25	33067	60.34	105	0.90		
29	27899	50.91	106	1.05		
37	22271	40.64	106	1.30		
41	19838	36.20	105	1.50	**K167**	
44	18501	33.76	104	1.70	**KA167**	**4P**
49	16506	30.12	103	1.90		
59	13925	25.41	101	2.30		
73	11114	20.28	98	2.70		
82	9902	18.07	95	3.20		
39	21202	38.69	50	0.80		
47	17284	31.54	53	1.00		
56	14555	26.56	54	1.10	**K157**	
62	13136	23.97	55	1.30	**KF157**	**4P**
70	11738	21.42	55	1.45	**KA157**	
80	10204	18.62	55	1.70	**KAF157**	
99	8280	15.11	55	2.10		
114	7146	13.04	54	2.30		
63	12960	23.65	35	0.95		
72	11415	20.83	36	1.05	**K127**	
83	9891	18.05	37	1.25	**KF127**	**4P**
104	7869	14.36	38	1.45	**KA127**	
116	7053	12.87	36	1.15	**KAF127**	
134	6110	11.15	36	1.30		
168	4861	8.87	36	1.45		
110kW						
20	40152	73.27	122	0.80		
22	36672	66.92	126	0.95		
25	33193	60.57	127	1.10		
28	29466	53.77	127	1.30		
34	23937	43.68	127	1.55	**K187**	**4P**
37	21827	39.83	126	1.65	**KA187**	
42	19558	35.69	125	1.85		
52	15755	28.75	123	2.10		
63	13021	23.76	121	2.50		
71	11563	21.10	120	2.80		
29	27899	50.91	95	0.85		
37	22271	40.64	97	1.05		
41	19838	36.20	97	1.25		
44	18501	33.76	97	1.40	**K167**	**4P**
49	16506	30.12	97	1.55	**KA167**	
59	13925	25.41	95	1.85		
73	11114	20.28	94	2.20		
84	9672	17.65	92	2.60		
62	16055	23.97	48	1.05	**K157**	
70	14347	21.42	49	1.10	**KF157**	
80	12471	18.62	50	1.15	**KA157**	**4P**
99	10120	15.11	50	1.26	**KAF157**	
114	8734	13.04	50	1.35		

n_a [r/min]	Ma [Nm]	i	F_{ra} [kN]	f_B	机型号 Type size	极数 Pole
132kW						
22	44822	66.92	111	0.80		
25	40569	60.57	114	0.90		
28	36014	53.77	117	1.10		
34	29256	43.68	118	1.30		
37	26677	39.83	118	1.40	**K187**	
42	23905	35.69	118	1.55	**KA187**	**4P**
52	19256	28.75	117	1.75		
57	17582	26.25	115	2.10		
63	15914	23.76	113	2.30		
71	14132	21.10	110	2.60		
87	11480	17.14	108	2.80		
37	27220	40.64	87	0.90		
41	24246	36.20	89	1.05		
44	22612	33.76	90	1.15	**K167**	
49	20174	30.12	90	1.30	**KA167**	**4P**
59	17019	25.41	90	1.55		
73	13583	20.28	89	1.85		
82	12103	18.07	88	2.20		
160kW						
28	36014	53.77	103	0.90		
34	29256	43.68	106	1.05		
52	19256	28.75	108	1.45	**K187**	
57	17582	26.25	108	1.75	**KA187**	**4P**
63	15914	23.76	107	1.90		
71	14132	21.10	105	2.10		
87	11480	17.14	103	2.30		
41	24246	36.20	78	0.85		
59	17019	25.41	83	1.25	**K167**	**4P**
73	13583	20.28	83	1.55	**KA167**	
82	12103	18.07	82	1.80		
200kW						
34	29256	43.68	90	0.85		
52	19256	28.75	97	1.15		
57	17582	26.25	98	1.30	**K187**	**4P**
63	15914	23.76	99	1.40	**KA187**	
71	14132	21.10	98	1.50		
87	11480	17.14	97	1.70		

K.

选型参数表 (恒扭矩)

Selection Table (Constant Torque)

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
200	0.19	6832	5.4		
	0.22	5922	5.4		
	0.24	5491	5.4		
	0.28	4759	5.4		
	0.31	4160	5.4		
	0.36	3645	5.4	K37R17	
	0.41	3205	5.4	KF37R17	
	0.47	2801	5.4	KA37R17	0.12
	0.53	2454	5.4	KAF37R17	
	0.53	2466	5.4		
	0.69	1892	5.4		
	0.79	1660	5.4		
	0.89	1466	5.4		
	1.02	1288	5.4		
	1.15	1136	5.4		
	1.32	996	5.4		
	1.50	876	5.4		
	1.72	761	5.4		
	1.95	671	5.4	K37R17	
	2.24	585	5.4	KF37R17	0.12
	2.56	512	5.4	KA37R17	
	2.90	451	5.4	KAF37R17	
	3.31	396	5.4		
	3.79	346	5.4		
	4.31	304	5.4	K37R17	
	4.91	267	5.4	KF37R17	0.18
	5.60	234	5.4	KA37R17	
	6.39	205	5.4	KAF37R17	
	7.3	181	5.4	K37R17	
	8.3	160	5.4	KF37R17	0.25
	9.8	136	5.4	KA37R17	
	10.5	127	5.4	KAF37R17	
	12	110	5.4	K37R17 KF37R17	0.37
	14	96	5.4	KA37R17 KAF37R17	
400	0.13	10138	5.6		
	0.15	8534	5.6		
	0.17	7662	5.6		
	0.19	6826	5.6		
	0.22	5983	5.6		
	0.25	5158	5.6		
	0.28	4601	5.6	K47R37	
	0.33	3940	5.6	KF47R37	0.12
	0.38	3477	5.6	KA47R37	
	0.43	3043	5.6	KAF47R37	
	0.48	2732	5.6		
	0.56	2354	5.6		
	0.63	2063	5.6		
	0.72	1819	5.6		
	0.83	1586	5.6		
	0.94	1388	5.6		
	1.1	1222	5.6		
	1.2	1097	5.6	K47R37	
	1.4	945	5.6	KF47R37	0.12
	1.6	831	5.6	KA47R37	
	1.8	718	5.6	KAF47R37	
	2.1	639	5.6		
				K47R37	
	2.4	552	5.6	KF47R37	0.18
	2.6	495	5.6	KA47R37	
	3.1	426	5.6	KAF47R37	

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
400				K47R37	
	3.5	375	5.6	KF47R37	0.25
	4.1	327	5.6	KA47R37	
	4.6	289	5.6	KAF47R37	
				K47R37	
	5.2	256	5.6	KF47R37	0.37
	5.9	225	5.6	KA47R37	
	6.7	198	5.6	KAF47R37	
				K47R37	
	8.1	171	5.6	KF47R37	0.55
	9.1	153	5.6	KA47R37	
	11	131	5.6	KAF47R37	
600	0.11	12169	7.2		
	0.12	11162	7.2		
	0.14	9503	7.2		
	0.15	8547	7.2		
	0.18	7277	7.2		
	0.20	6478	7.2	K57R37	
	0.23	5662	7.2	KF57R37	
	0.26	5033	7.2	KA57R37	0.12
	0.30	4340	7.2	KAF57R37	
	0.34	3854	7.2		
	0.39	3390	7.2		
	0.45	2924	7.2		
	0.51	2593	7.2		
	0.58	2249	7.2		
	0.66	1986	7.2		
	0.75	1743	7.2		
	0.85	1539	7.2	K57R37	
	0.97	1354	7.2	KF57R37	0.12
	1.1	1174	7.2	KA57R37	
	1.3	1036	7.2	KAF57R37	
	1.4	906	7.2	K57R37	
	1.6	806	7.2	KF57R37	0.18
	1.9	699	7.2	KA57R37	
	2.1	615	7.2	KAF57R37	
				K57R37	
	2.4	544	7.2	KF57R37	0.25
	2.8	473	7.2	KA57R37	
	3.2	421	7.2	KAF57R37	
				K57R37	
	3.7	362	7.2	KF57R37	0.37
	4.2	319	7.2	KA57R37	
	4.8	280	7.2	KAF57R37	
				K57R37	
	5.7	246	7.2	KF57R37	0.55
	6.5	215	7.2	KA57R37	
	7.2	192	7.2	KAF57R37	
				K57R37	
	8.4	166	7.2	KF57R37	0.75
	9.6	145	7.2	KA57R37	
	11	129	7.2	KAF57R37	
	13	111	7.2	K57R37 KF57R37	1.1
	14	97	7.2	KA57R37 KAF57R37	
820	0.11	12139	10	K67R37	
	0.12	11134	10	KF67R37	0.12
	0.14	9479	10	KA67R37	
	0.16	8173	10	KAF67R37	

选型参数表 (恒扭矩)

Selection Table (Constant Torque)

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
820	0.18	7259	10		
	0.20	6462	10		
	0.23	5648	10		
	0.27	4846	10	K67R37	
	0.30	4329	10	KF67R37	
	0.35	3750	10	KA67R37	0.12
	0.40	3315	10	KAF67R37	
	0.45	2917	10		
	0.52	2532	10		
	0.58	2244	10		
	0.66	1981	10		
	0.75	1739	10	K67R37 KF67R37	0.12
	0.85	1536	10	KA67R37	
	0.97	1351	10	KAF67R37	
	1.1	1171	10	K67R37	
	1.3	1034	10	KF67R37	0.18
	1.5	903	10	KA67R37	
	1.7	793	10	KAF67R37	
	1.9	697	10	K67R37 KF67R37	0.25
	2.2	613	10	KA67R37	
	2.5	542	10	KAF67R37	
	2.8	471	10	K67R37 KF67R37	0.37
	3.2	420	10	KA67R37 KAF67R37	
	3.9	361	10	K67R37	
	4.3	323	10	KF67R37	0.55
	5.0	279	10	KA67R37	
	5.7	246	10	KAF67R37	
	6.4	217	10	K67R37 KF67R37	0.75
	7.3	191	10	KA67R37 KAF67R37	
1550	0.09	15336	15		
	0.09	14066	15		
	0.11	11976	15		
	0.13	10234	15		
	0.15	8824	15		
	0.17	7540	15	K77R37	
	0.20	6617	15	KF77R37	0.12
	0.23	5784	15	KA77R37	
	0.26	5097	15	KAF77R37	
	0.29	4497	15		
	0.33	3968	15		
	0.38	3490	15		
	0.45	2906	15		
	0.48	2721	15		
	0.55	2374	15 15	K77R37 KF77R37 KA77R37 KAF77R37	0.18
	0.64	2053	15	K77R37 KF77R37	0.18
	0.74	1775	15	KA77R37	
	0.86	1516	15	KAF77R37	
	1.0	1390	15	K77R37 KF77R37	0.25
	1.1	1220	15	KA77R37	
	1.3	1054	15	KAF77R37	

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
1550	1.4	925	15	K77R37 KF77R37	0.37
	1.6	817	15	KA77R37	
	1.9	710	15	KAF77R37	
	2.2	623	15	K77R37 KF77R37	0.55
	2.5	553	15	KA77R37	
	2.9	485	15	KAF77R37	
	3.2	428	15	K77R37 KF77R37	0.75
	3.8	368	15	KA77R37 KAF77R37	
	4.3	328	15	K77R37 KF77R37	1.1
	4.8	291	15	KA77R37	
	5.6	252	15	KAF77R37	
2700	0.09	14828	26		
	0.10	13168	26		
	0.11	11736	26		
	0.13	10217	26	K87R57	
	0.14	9073	26	KF87R57	0.12
	0.17	7854	26	KA87R57	
	0.19	6832	26	KAF87R57	
	0.22	5930	26		
	0.25	5239	26		
	0.29	4562	26		
	0.32	4037	26	K87R57	
	0.36	3609	26	KF87R57	0.18
	0.42	3106	26	KA87R57	
	0.48	2728	26	KAF87R57	
	0.56	2371	26	K87R57 KF87R57 KA87R57 KAF87R57	0.25
	0.64	2086	26	K87R57 KF87R57	0.25
	0.72	1854	26	KA87R57 KAF87R57	
	0.80	1658	26	K87R57 KF87R57	0.37
	0.94	1415	26	KA87R57	
	1.08	1229	26	KAF87R57	
	1.3	1078	26	K87R57 KF87R57	0.55
	1.5	951	26	KA87R57	
	1.7	837	26	KAF87R57	
	1.9	726	26	K87R57 KF87R57	0.75
	2.2	638	26	KA87R57 KAF87R57	
	2.5	562	26	K87R57 KF87R57	1.1
	3.0	474	26	KA87R57	
	3.3	426	26	KAF87R57	
	3.8	373	26	K87R57 KF87R57	1.5
	4.2	330	26	KA87R57 KAF87R57	
	4.9	294	26	K87R57	
	5.7	250	26	KF87R57	2.2
	6.1	236	26	KA87R57	
	7.1	201	26	KAF87R57	

K.

选型参数表 (恒扭矩)

Selection Table (Constant Torque)

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
4300	0.07	18091	38		
	0.08	16666	38		
	0.09	14896	38		
	0.10	13183	38	**K97R57**	
	0.11	11677	38	**KF97R57**	**0.12**
	0.13	10317	38	**KA97R57**	
	0.14	9083	38	**KAF97R57**	
	0.16	8055	38		
	0.19	6969	38		
	0.22	6027	38	**K97R57**	
	0.24	5392	38	**KF97R57**	**0.18**
	0.28	4669	38	**KA97R57**	
	0.32	4081	38	**KAF97R57**	
	0.37	3583	38	**K97R57**	
				KF97R57	**0.25**
	0.43	3108	38	**KA97R57**	
				KAF97R57	
	0.48	2756	38	**K97R57**	
				KF97R57	**0.37**
			38	**KA97R57**	
				KAF97R57	
	0.55	2419	38	**K97R57**	
				KF97R57	**0.37**
	0.63	2123	38	**KA97R57**	
				KAF97R57	
	0.75	1856	38	**K97R57**	
	0.86	1625	38	**KF97R57**	**0.55**
	0.97	1430	38	**KA97R57**	
	1.1	1261	38	**KAF97R57**	
	1.3	1102	38	**K97R57**	
				KF97R57	**0.75**
	1.5	957	38	**KA97R57**	
				KAF97R57	
				K97R57	
	1.6	855	38	**KF97R57**	**1.1**
	1.9	743	38	**KA97R57**	
	2.2	651	38	**KAF97R57**	
	2.4	573	38	**K97R57**	
				KF97R57	**1.5**
	2.8	504	38	**KA97R57**	
				KAF97R57	
				K97R57	
	3.3	437	38	**KF97R57**	**2.2**
	3.7	382	38	**KA97R57**	
	4.2	342	38	**KAF97R57**	
				K97R57	
	4.7	305	38	**KF97R57**	**3.0**
	5.5	258	38	**KA97R57**	
	6.2	232	38	**KAF97R57**	
	7.2	199	38	**K97R57**	
				KF97R57	**4.0**
				KA97R57	
				KAF97R57	
8000	0.09	14311	62	**K107R77**	
				KF107R77	**0.12**
	0.11	12211	62	**KA107R77**	
				KAF107R77	

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
8000				**K107R77**	
	0.12	10678	62	**KF107R77**	**0.18**
	0.14	9524	62	**KA107R77**	
	0.16	8328	62	**KAF107R77**	
				K107R77	
	0.18	7269	62	**KF107R77**	**0.25**
	0.22	6184	62	**KA107R77**	
	0.23	5662	62	**KAF107R77**	
				K107R77	
	0.26	5138	62	**KF107R77**	**0.37**
	0.31	4360	62	**KA107R77**	
	0.35	3811	62	**KAF107R77**	
				K107R77	
	0.41	3358	62	**KF107R77**	**0.55**
	0.47	2977	62	**KA107R77**	
	0.54	2598	62	**KAF107R77**	
	0.61	2286	62	**K107R77**	
				KF107R77	**0.75**
	0.72	1939	62	**KA107R77**	
				KAF107R77	
				K107R77	
	0.82	1713	62	**KF107R77**	**1.1**
	0.90	1555	62	**KA107R77**	
	1.0	1336	62	**KAF107R77**	
				K107R77	
	1.2	1166	62	**KF107R77**	**1.5**
	1.4	1030	62	**KA107R77**	
	1.5	904	62	**KAF107R77**	
				K107R77	
	1.8	793	62	**KF107R77**	**2.2**
	2.1	696	62	**KA107R77**	
	2.3	614	62	**KAF107R77**	
	2.7	522	62	**K107R77**	
				KF107R77	**3.0**
	3.1	461	62	**KA107R77**	
				KAF107R77	
	3.5	408	62	**K107R77**	
				KF107R77	**4.0**
	4.0	364	62	**KA107R77**	
				KAF107R77	
				K107R77	
	4.5	318	62	**KF107R77**	**5.5**
	5.0	286	62	**KA107R77**	
	5.7	251	62	**KAF107R77**	
13000	0.08	17396	75	**K127R77**	
	0.08	15859	75	**KF127R77**	**0.18**
	0.09	14843	75	**KA127R77**	
	0.11	12331	75	**KAF127R77**	
	0.12	10819	75	**K127R77**	
				KF127R77	**0.25**
	0.14	9801	75	**KA127R77**	
				KAF127R77	
				K127R77	
	0.16	8366	75	**KF127R77**	**0.37**
	0.18	7329	75	**KA127R77**	
	0.21	6430	75	**KAF127R77**	

选型参数表 (恒扭矩)

Selection Table (Constant Torque)

Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
13000	0.24	5793	75	K127R77	0.55
	0.28	4924	75	KF127R77	
	0.32	4332	75	KA127R77	
	0.36	3854	75	KAF127R77	
	0.42	3282	75	K127R77 KF127R77 KA127R77 KAF127R77	0.75
	0.47	2982	75		
	0.54	2584	75	K127R77 KF127R77 KA127R77 KAF127R77	1.1
	0.62	2248	75		
	0.73	1909	75	K127R77 KF127R77 KA127R77 KAF127R77	1.1
	0.80	1741	75	K127R77 KF127R77 KA127R77 KAF127R77	1.5
	0.92	1527	75		
	1.1	1335	75	K127R77 KF127R77 KA127R77 KAF127R77	2.2
	1.2	1171	75		
	1.4	1000	75		
	1.6	877	75	K127R77 KF127R77 KA127R77 KAF127R77	3.0
	1.8	783	75		
	2.0	698	75		
	2.4	605	75	K127R77 KF127R77 KA127R77 KAF127R77	4.0
	2.6	548	75		
	3.0	473	75	K127R77 KF127R77 KA127R77 KAF127R77	5.5
	3.5	410	75		
	2.7	541	75	K127R87 KF127R87 KA127R87 KAF127R87	4.0
	3.0	477	75	K127R87 KF127R87 KA127R87 KAF127R87	5.5
	3.4	423	75		
	3.9	369	75	K127R87 KF127R87 KA127R87 KAF127R87	7.5
	4.3	333	75		
	5.0	289	75		
	5.7	254	75	K127R87 KF127R87 KA127R87 KAF127R87	7.5
18000	0.08	17778	107	K157R97 KF157R97 KA157R97 KAF157R97	0.55
	0.09	15892	107		
	0.09	14803	107		
	0.11	13233	107		
18000	0.12	11431	107	K157R97 KF157R97 KA157R97 KAF157R97	0.55
	0.14	10219	107		
	0.16	8885	107		
	0.18	7777	107		
	0.27	5102	107	K157R97 KF157R97 KA157R97 KAF157R97	1.1
	0.31	4561	107		
	0.35	4001	107		
	0.39	3578	107		
	0.45	3110	107		
	0.53	2625	107	K157R97 KF157R97 KA157R97 KAF157R97	1.5
	0.60	2346	107		
	0.70	2040	107	K157R97 KF157R97 KA157R97 KAF157R97	2.2
	0.78	1824	107		
	0.86	1668	107	K157R97 KF157R97 KA157R97 KAF157R97	2.2
	1.04	1373	107		
	1.2	1236	107	K157R97 KF157R97 KA157R97 KAF157R97	3.0
	1.3	1105	107		
	1.5	960	107	K157R97 KF157R97 KA157R97 KAF157R97	4.0
	1.7	870	107		
	1.9	760	107		
	2.2	665	107	K157R97 KF157R97 KA157R97 KAF157R97	5.5
	2.5	570	107		
	2.8	510	107	K157R97 KF157R97 KA157R97 KAF157R97	7.5
	3.3	437	107		
	3.8	381	107	K157R97 KF157R97 KA157R97 KAF157R97	7.5
	4.2	340	107		
	5.0	293	107	K157R97 KF157R97 KA157R97 KAF157R97	11
	3.7	392	107	K157R107 KF157R107 KA157R107 KAF157R107	7.5
	4.4	331	107		
	4.8	303	107	K157R107 KF157R107 KA157R107 KAF157R107	11
	5.7	258	107	K157R107 KF157R107 KA157R107 KAF157R107	15
	6.2	235	107		
	6.8	216	107		

K.

选型参数表
(恒扭矩)


Selection Table
(Constant Torque)


Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
32000	0.07	19598	135		
	0.08	17297	135		
	0.09	14751	135	**K167R97**	
	0.11	13019	135	**KA167R97**	**0.55**
	0.12	11500	135		
	0.14	10199	135		
	0.16	8573	135	**K167R97** **KA167R97**	**0.75**
	0.22	6453	135	**K167R97**	**1.1**
	0.27	5266	135	**KA167R97**	
	0.30	4708	135	**K167R97**	**1.5**
	0.35	4052	135	**KA167R97**	
	0.43	3320	135	**K167R97**	**2.2**
	0.52	2709	135	**KA167R97**	
	0.63	2249	135	**K167R97**	**3**
	0.65	2168	135	**KA167R97**	
	0.85	1693	135	**K167R97**	**4**
	1.0	1384	135	**KA167R97**	
	1.1	1274	135	**K167R97**	**5.5**
	1.3	1094	135	**KA167R97**	
	1.6	929	135	**K167R97**	
	1.7	838	135	**KA167R97**	**7.5**
	1.9	744	135		
	2.6	551	135	**K167R97**	**11**
	3.1	473	135	**KA167R97**	
	3.5	420	135	**K167R97**	**15**
	4.0	362	135	**KA167R97**	
	4.9	300	135	**K167R107** **KA167R107**	**18.5**
	5.6	262	135	**K167R107**	**22**
	6.1	241	135	**KA167R107**	
	7.0	211	135	**K167R107**	
	7.6	194	135	**KA167R107**	**30**
	8.3	178	135		
	9.8	151	135	**K167R107** **KA167R107**	**37**
	11.6	128	135	**K167R107**	**45**
	13.2	112	135	**KA167R107**	


Mamax [Nm]	n_a [r/min]	i	F_{ra} [kN]	机型号 Type size	P [kW]/4P
50000	0.05	29171	171		
	0.06	24289	171	**K187R97**	
	0.07	21774	171	**KA187R97**	**0.55**
	0.08	17118	171		
	0.09	15181	171		
	0.11	12761	171	**K187R97**	
	0.12	11727	171	**KA187R97**	**0.75**
	0.13	10414	171		
	0.15	9311	171	**K187R97**	
	0.17	8372	171	**KA187R97**	**1.1**
	0.19	7266	171		
	0.21	6565	171	**K187R97**	
	0.23	6033	171	**KA187R97**	**1.5**
	0.26	5358	171		
	0.30	4790	171	**K187R97**	
	0.33	4307	171	**KA187R97**	**2.2**
	0.37	3806	171		
	0.44	3227	171	**K187R97**	**3**
	0.52	2737	171	**KA187R97**	
	0.64	2252	171	**K187R97**	
	0.71	2028	171	**KA187R97**	**4**
	0.78	1836	171		
	0.88	1628	171	**K187R97**	**5.5**
	1.1	1326	171	**KA187R97**	
	1.2	1247	171	**K187R97**	**7.5**
	1.3	1073	171	**KA187R97**	
	2.4	610	171	**K187R97**	**15**
	2.6	558	171	**KA187R97**	
	3.1	473	171	**K187R97** **KA187R97**	**18.5**
	1.8	835	171	**K187R107** **KA187R107**	**11**
	2.0	728	171	**K187R107**	**15**
	2.5	592	171	**KA187R107**	
	3.3	450	171	**K187R107**	**18.5**
	3.7	393	171	**KA187R107**	
	4.1	355	171	**K187R107** **KA187R107**	**30**
	6.6	226	171	**K187R107** **KA187R107**	**37**
	7.8	191	171	**K187R107**	
	8.9	167	171	**KA187R107**	**45**
	10.5	141	171		

K37-157
安装结构尺寸

K37-157
Mounting Dimensional Description

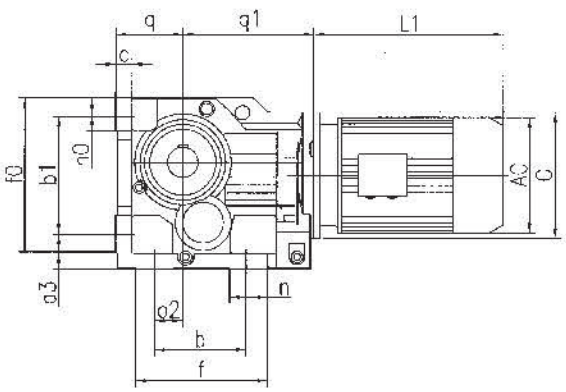

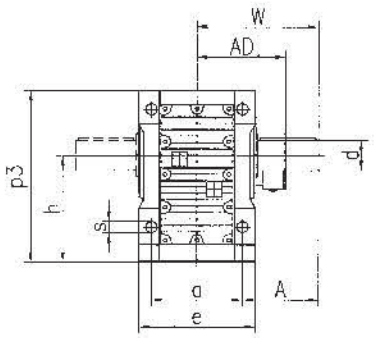



规格 Specification	a b	a_2 h	b_1 q	q_1 h_1	s a_3	d l	l_1 l_2	u t	w A	e p_3	c n_0	f_0 f	n M	G	电机尺寸 Motor Size		
															AC	AD	L1
K37	100 110	28 $100_{-0.5}$	115 $63_{-0.5}$	139 8.5	Φ11 32	Φ25k6 50	5 40	8 28	110 60	120 165	16 37	150 143	38 M10	Φ120	见附录 A-2 Please see appendix A-2		
K47	120 130	35 $112_{-0.5}$	130 $71_{-0.5}$	166 7.2	Φ11 37	Φ30k6 60	3.5 50	8 33	135 75	145 185	18 37	170 162	32 M10	Φ160			
K57	130 130	30 $132_{-0.5}$	150 $80_{-0.5}$	173 13.1	Φ13.5 45	Φ35k6 70	7 56	10 38	153 88	157 217	21 43	190 172	40 M12	Φ160			
K67	140 120	30 $140_{-0.5}$	160 $90_{-0.5}$	179 20	Φ13.5 45	Φ40k6 80	5 70	12 43	171 101	170 228	24 43	203 170	45 M16	Φ160			
K77	165 150	40 $180_{-0.5}$	200 $112_{-0.5}$	202 31.3	Φ17.5 55	Φ50k6 100	10 80	14 53.5	206 123.5	200 288	27 55	263 208	55 M16	Φ200			
K87	180 180	55 $212_{-0.5}$	233 $132_{-0.5}$	257 25.9	Φ22 70	Φ60m6 120	5 110	18 64	240 150	230 340	32 67	305 260	75 M20	Φ250			
K97	240 240	75 265_{-1}	295 $160_{-0.5}$	277 32.3	Φ26 75	Φ70m6 140	7.5 125	20 74.5	291 171	290 417	36 82	372 294	60 M20	Φ300			
K107	270 280	95 315_{-1}	360 $200_{-0.5}$	341 52	Φ33 95	Φ90m6 170	5 160	25 95	347 212	340 503	40 98	448 380	100 M24	Φ350			
K127	330 350	115 375_{-1}	420 $225_{-0.5}$	390 53	Φ39 110	Φ110m6 210	15 180	28 116	418 253	400 592	45 111	526 440	100 M24	Φ450			
K157	420 380	140 450_{-1}	500 280_{-1}	426 71.7	Φ39 130	Φ120m6 210	5 200	32 127	457 247	500 705	50 130	634 480	100 M24	Φ550			


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)


K.


K167
安装结构尺寸

K167
Mounting Dimensional Description

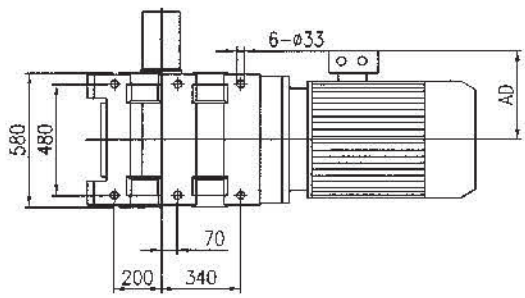



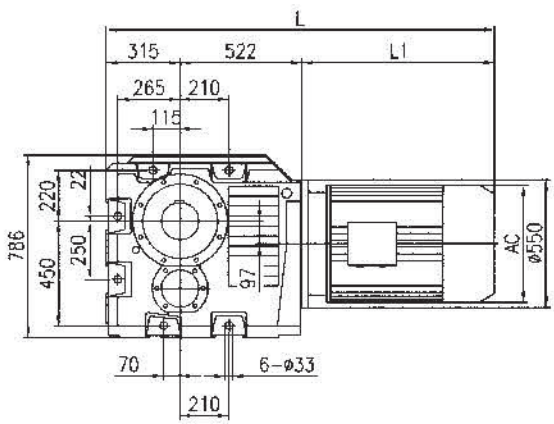

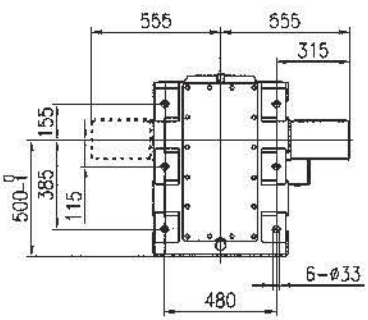


电机机座号 Motor fram size	160M	160L	180M	180L	200	225S	225M	250M	280S	280M	315S	315M	315L
AC	330	330	380	380	420	470	470	510	580	580	645	645	645
AD	255	255	280	280	305	335	335	370	410	410	530	530	576
L1	505	560	590	630	660	675	705	770	845	895	1100	1130	1310
L	1342	1397	1427	1467	1497	1512	1542	1607	1682	1732	1937	1967	2147


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)


K187
安装结构尺寸

K187
Mounting Dimensional Description

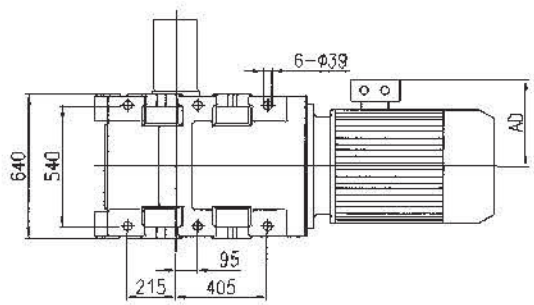

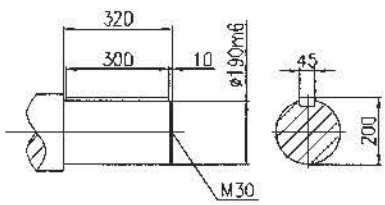

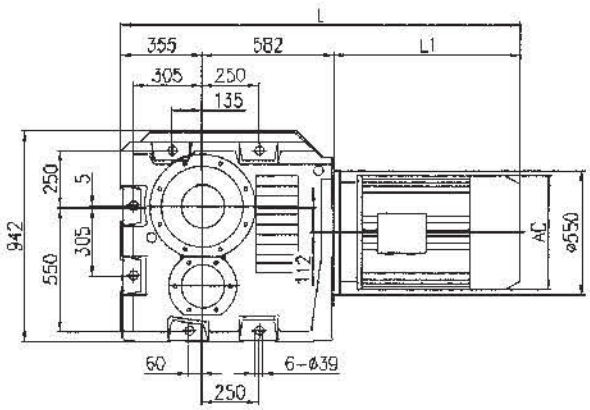

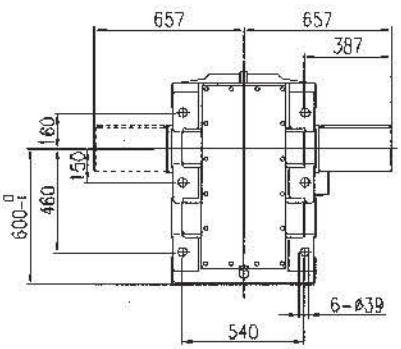


电机机座号 Motor fram size	160L	180M	180L	200	225S	225M	250M	280S	280M	315S	315M	315L
AC	330	380	380	420	470	470	510	580	580	645	645	645
AD	255	280	280	305	335	335	370	410	410	530	530	576
L1	560	590	630	660	675	705	770	845	895	1100	1130	1310
L	1497	1527	1567	1597	1612	1642	1707	1782	1832	2037	2067	2247


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KF37-157
安装结构尺寸


KF37-157
Mounting Dimensional Description

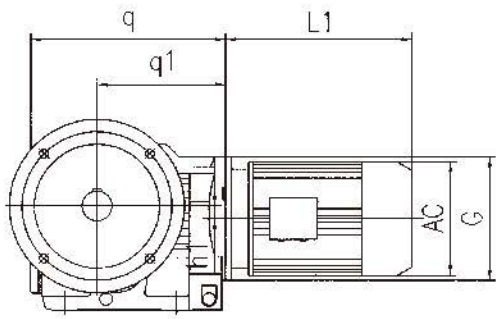

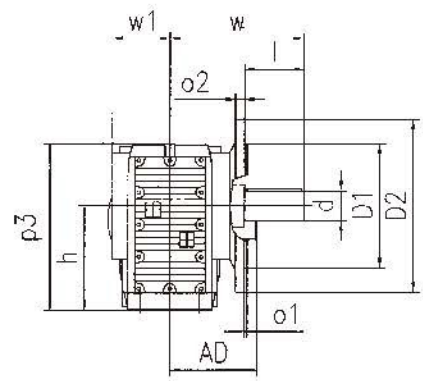




KF37-87



KF97-157




规格 Specification	s o_2	q w	q_1 w_1	h_1 l	D l_1	D_1 l_2	D_2 d	h M	p_3 u	o_1 t	G	电机尺寸 Motor Size AC / AD / L1
KF37	Φ9 10	210 134	139 57.5	8.5 50	Φ130 5	Φ110j6 40	Φ160 Φ25k6	$100_{-0.5}$ M10	164 8	3.5 28	Φ120	见附录 A-2 Please see appendix A-2
KF47	Φ11 10	243 160	166 72	7.2 60	Φ165 3.5	Φ130j6 50	Φ200 Φ30k6	$112_{-0.5}$ M10	185 8	3.5 33	Φ160	
KF57	Φ13.5 15	269 177	173 80	13.1 70	Φ215 7	Φ180j6 56	Φ250 Φ35k6	$132_{-0.5}$ M12	215 10	4 38	Φ160	
KF67	Φ13.5 15	274 193	179 86.5	20 80	Φ215 5	Φ180j6 70	Φ250 Φ40k6	$140_{-0.5}$ M16	226 12	4 43	Φ160	
KF77	Φ13.5 16	312 242	202 101	31.3 100	Φ265 10	Φ230j6 80	Φ300 Φ50k6	$180_{-0.5}$ M16	286 14	4 53.5	Φ200	
KF87	Φ17.5 18	390 270	257 116	25.9 120	Φ300 5	Φ250h6 110	Φ350 Φ60m6	$212_{-0.5}$ M20	338 18	5 64	Φ250	
KF97	Φ17.5 22	435 332	277 171	32.3 140	Φ400 7.5	Φ350h6 125	Φ450 Φ70m6	265_{-1} M20	414 20	5 74.5	Φ300	
KF107	Φ17.5 22	537 386	341 175	52 170	Φ400 5	Φ350h6 160	Φ450 Φ90m6	315_{-1} M24	500 25	5 95	Φ350	
KF127	Φ17.5 25	615 466	390 203	53 210	Φ500 15	Φ450h6 180	Φ550 Φ110m6	375_{-1} M24	592 28	5 116	Φ450	
KF157	Φ22 28	706 520	426 253	71.7 210	Φ600 5	Φ550h6 200	Φ660 Φ120m6	450_{-1} M24	705 32	6 127	Φ550	

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KA37-107
安装结构尺寸

KA37-107
Mounting Dimensional Description

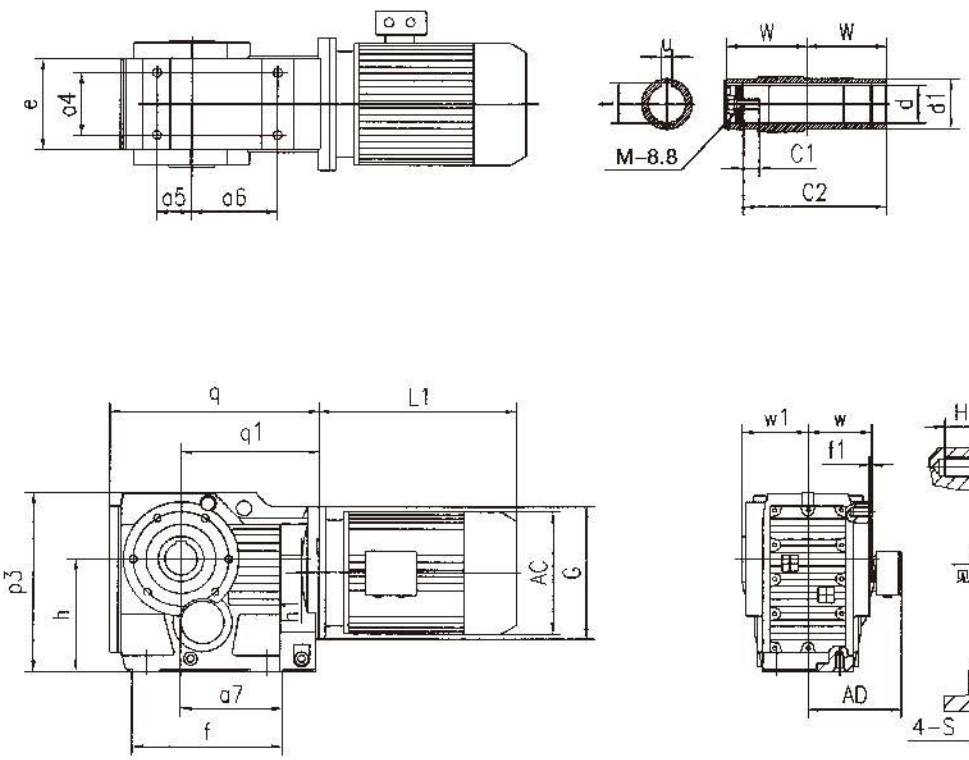


规格 Specification	s q	l_3 q_1	e w	a_4 d	a_5 d_1	a_6 t	a_7 u	f f_1	h H	h_1 M_1	p_3 c_1	c_2 M	G W_1	电机尺寸 Motor Size AC / AD / L1
KA37	M10 210	20 139	100 60	60 Φ30H7	35 Φ45	82 33.3	97 8	147 2.5	$100_{-0.5}$ 12	8.5 M8	164 17	105 M10x25	Φ120 63	见附录 A-2 Please see appendix A-2
KA47	M10 243	20 166	110 75	70 Φ35H7	40 Φ50	100 38.3	115 10	170 3	$112_{-0.5}$ 12	7.2 M8	185 22	132 M12x30	Φ160 78	
KA57	M12 269	25 173	122 83	88 Φ40H7	47 Φ55	105 43.3	120 12	182 3	$132_{-0.5}$ 20	13.1 M12	215 29	142 M16x40	Φ160 86	
KA67	M12 274	25 179	130 90	88 Φ40H7	42 Φ55	110 43.3	125 12	182 3.5	$140_{-0.5}$ 20	20 M12	226 29	156 M16x40	Φ160 94	
KA77	M16 312	32 202	156 105	102 Φ50H7	48 Φ70	122 53.8	139 14	204 4	$180_{-0.5}$ 20	31.3 M12	286 32	183 M16x45	Φ200 108	
KA87	M16 390	32 257	170 120	118 Φ60H7	65 Φ85	160 64.4	190 18	280 4	$212_{-0.5}$ 26	25.9 M16	338 36	210 M20x50	Φ250 123	
KA97	M20 435	36 277	226 150	160 Φ70H7	83 Φ95	165 74.9	190 20	298 4	265_{-1} 26	32.3 M16	414 34	270 M20x50	Φ300 153	
KA107	M24 537	44 341	266 175	190 Φ90H7	100 Φ118	190 95.4	230 25	370 2.5	315_{-1} /	52 /	500 40	313 M24x60	Φ350 178	

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KA127-157
安装结构尺寸

KA127-157
Mounting Dimensional Description

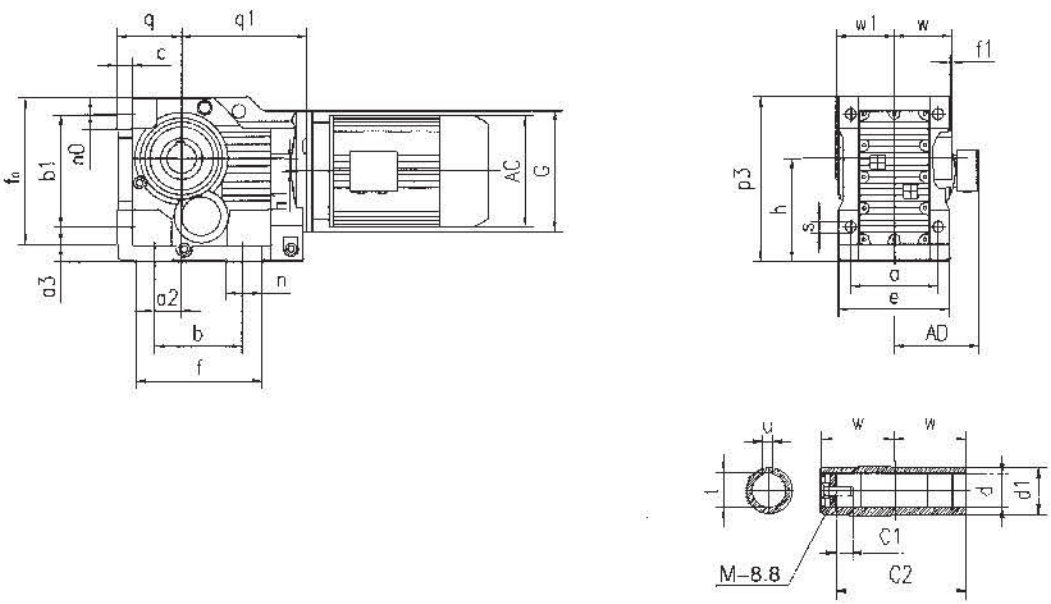


规格 Specification	s b	p_3 a_2	h n	a f_0	e a_3	f_1 b_1	w n_0	d h_1	d_1 c	t q	u q_1	f c_1	c_2 M	G W_1	电机尺寸 Motor Size AC / AD / L1
KA127	Φ39 350	592 115	375-1 100	330 526	400 110	2.5 420	205 111	Φ100H7 53	Φ135 45	106.4 225-0.5	28 390	440 38	373 M24x60	Φ450 208	见附录 A-2 Please see appendix A-2
KA157	Φ39 380	705 140	450-1 100	420 634	500 130	7 500	250 130	Φ120H7 71.7	Φ155 50	127.4 280-1	32 426	480 36	460 M24x60	Φ550 253	

注:电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

A向法兰安装结构尺寸 (Fig.A Mounting Dimension)

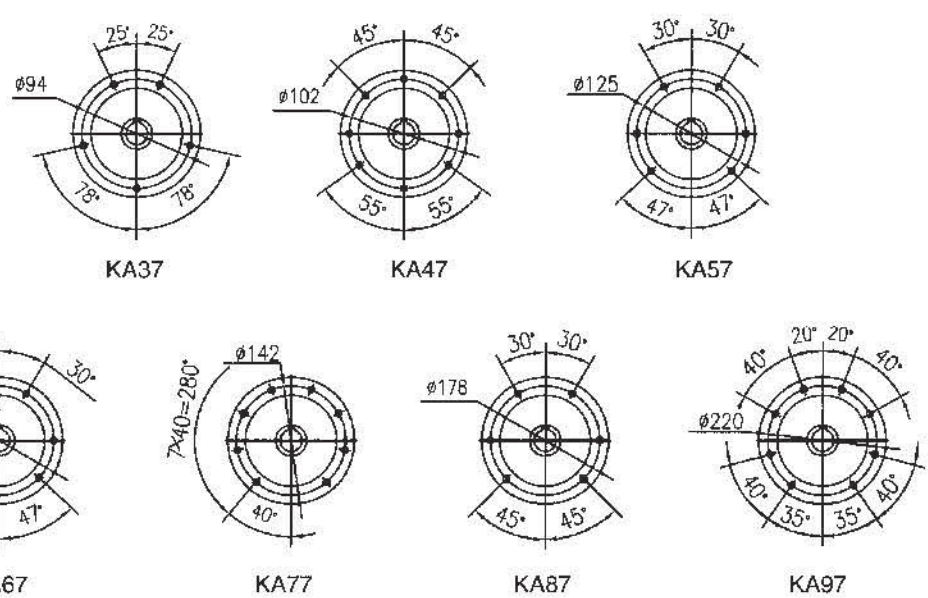

KA167
安装结构尺寸

KA167
Mounting Dimensional Description

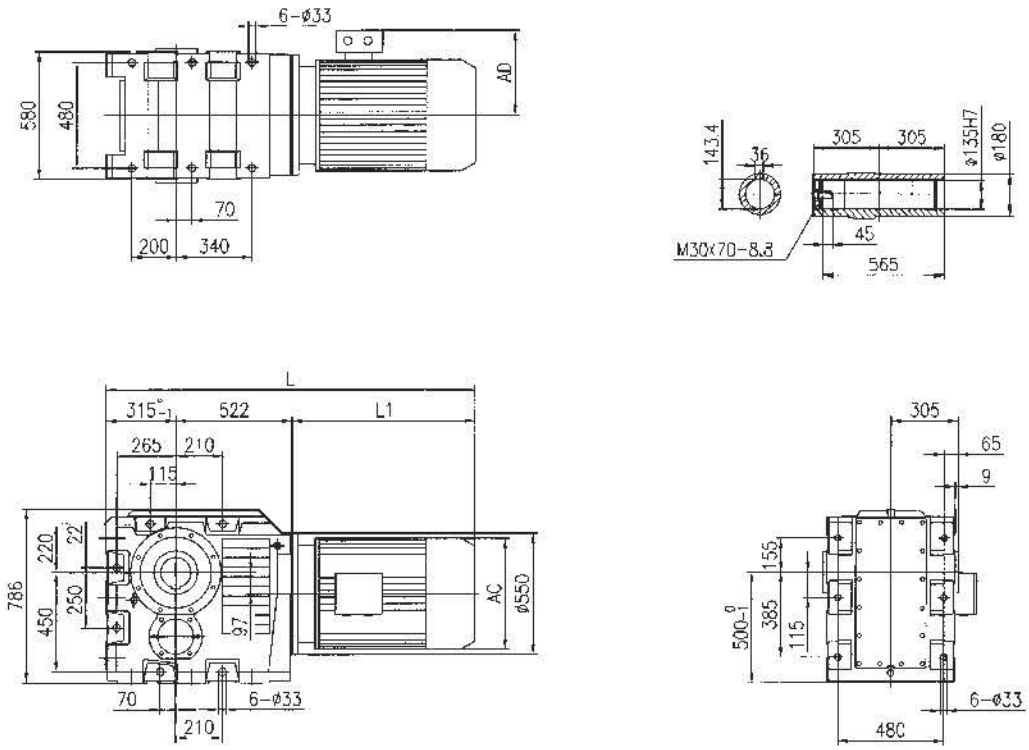

电机机座号 Motor fram size	160M	160L	180M	180L	200	225S	225M	250M	280S	280M	315S	315M	315L
AC	330	330	380	380	420	470	470	510	580	580	645	645	645
AD	255	255	280	280	305	335	335	370	410	410	530	530	576
L1	505	560	590	630	660	675	705	770	845	895	1100	1130	1310
L	1342	1397	1427	1467	1497	1512	1542	1607	1682	1732	1937	1967	2147


注:电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

K.

KA187
安装结构尺寸

KA187
Mounting Dimensional Description

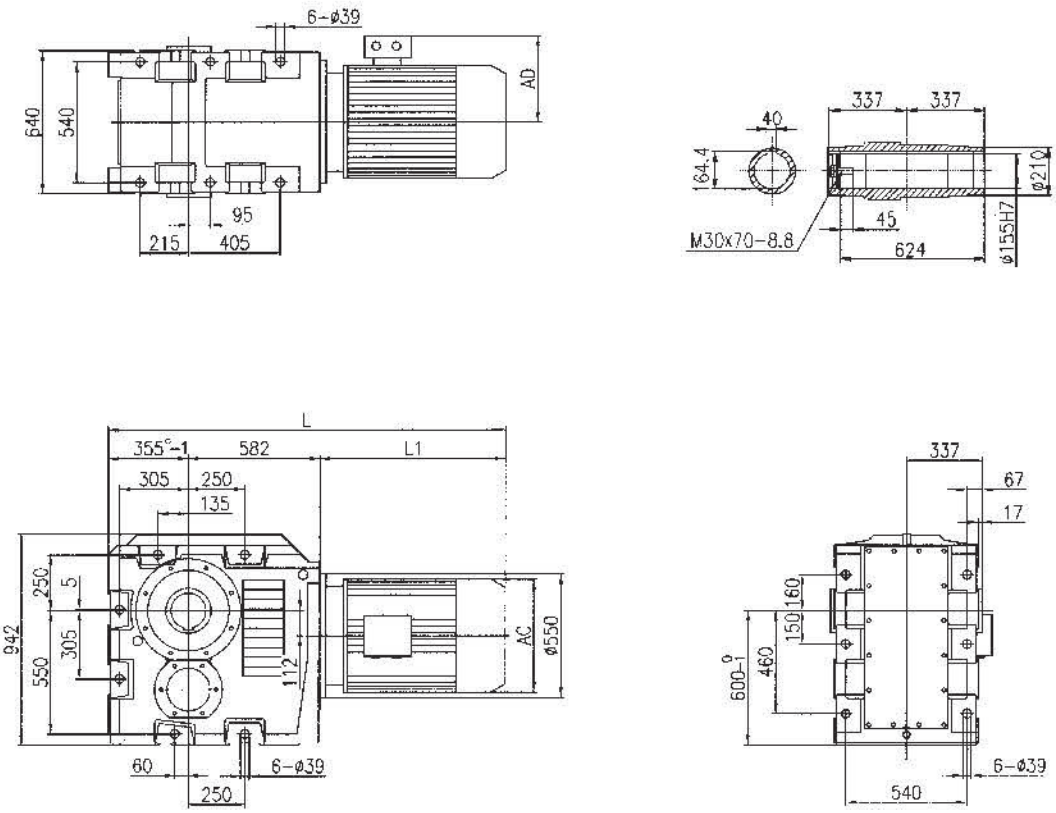


电机机座号 Motor fram size	160L	180M	180L	200	225S	225M	250M	280S	280M	315S	315M	315L
AC	330	380	380	420	470	470	510	580	580	645	645	645
AD	255	280	280	305	335	335	370	410	410	530	530	576
L1	560	590	630	660	675	705	770	845	895	1100	1130	1310
L	1497	1527	1567	1597	1612	1642	1707	1782	1832	2037	2067	2247


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KAF37-157
安装结构尺寸


KAF37-157
Mounting Dimensional Description

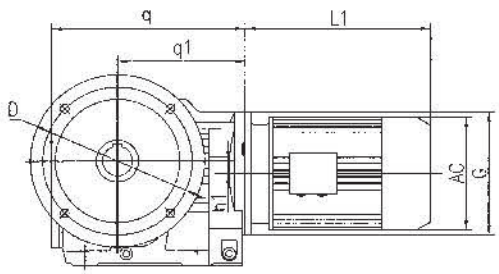



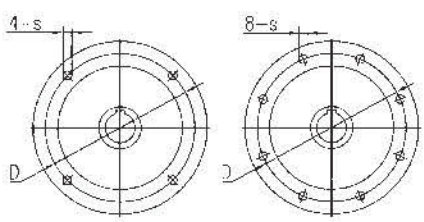

KAF37–87 KAF97–157




规格 Specification	s o_1	q o_2	q_1 w	h_1 f_1	D d	D_1 d_1	D_2 u	h t	p_3 c_1	c_2 M	G W_1	电机尺寸 Motor Size AC / AD / L1
KAF37	Φ9 3.5	210 10	139 60	8.5 24	Φ130 Φ30H7	Φ110j6 Φ45	Φ160 8	$100_{-0.5}$ 33.3	164 17	105 M10x25	Φ120 63	见附录 A-2 Please see appendix A-2
KAF47	Φ11 3.5	243 10	166 75	7.2 25	Φ165 Φ35H7	Φ130j6 Φ50	Φ200 10	$112_{-0.5}$ 38.3	185 22	132 M12x30	Φ160 78	
KAF57	Φ13.5 4	269 15	173 83	13.1 23.5	Φ215 Φ40H7	Φ180j6 Φ55	Φ250 12	$132_{-0.5}$ 43.3	215 29	142 M16x40	Φ160 86	
KAF67	Φ13.5 4	274 15	179 90	20 23	Φ215 Φ40H7	Φ180j6 Φ55	Φ250 12	$140_{-0.5}$ 43.3	226 29	156 M16x40	Φ160 94	
KAF77	Φ13.5 4	312 16	202 105	31.3 37	Φ265 Φ50H7	Φ230j6 Φ70	Φ300 14	$180_{-0.5}$ 53.8	286 32	183 M16x45	Φ200 108	
KAF87	Φ17.5 5	390 18	257 120	25.9 30	Φ300 Φ60H7	Φ250h6 Φ85	Φ350 18	$212_{-0.5}$ 64.4	338 36	210 M20x50	Φ250 123	
KAF97	Φ17.5 5	435 22	277 150	32.3 41.5	Φ400 Φ70H7	Φ350h6 Φ95	Φ450 20	265_{-1} 74.9	414 34	270 M20x50	Φ300 153	
KAF107	Φ17.5 5	537 22	341 175	52 41	Φ400 Φ90H7	Φ350h6 Φ118	Φ450 25	315_{-1} 95.4	500 40	313 M24x60	Φ350 178	
KAF127	Φ17.5 5	615 25	390 205	53 51	Φ500 Φ100H7	Φ450h6 Φ135	Φ550 28	375_{-1} 106.4	592 38	373 M24x60	Φ450 208	
KAF157	Φ22 6	706 28	426 250	71.7 60	Φ600 Φ120H7	Φ550h6 Φ155	Φ660 32	450_{-1} 127.4	705 36	460 M24x60	Φ550 253	


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KAB47-107
安装结构尺寸

KAB47-107
Mounting Dimensional Description

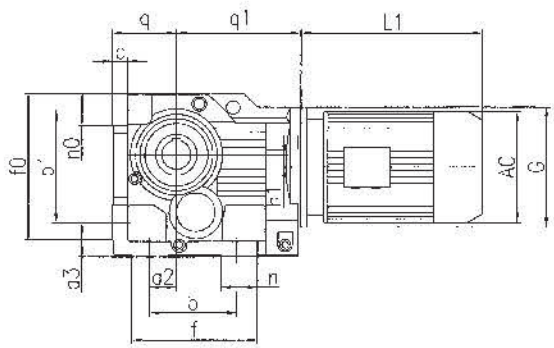



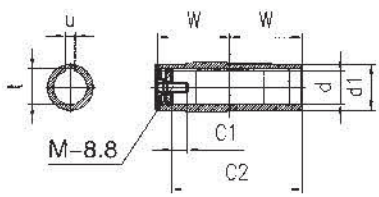


规格 Specification	s b	p_3 a_2	h n	a f_0	e a_3	f_1 b_1	w n_0	d h_1	d_1 c	t q	u q_1	f f_2	c_1 c_2	W_1 M	G	电机尺寸 Motor Size AC / AD / L1
KAB47	Φ11 130	185 35	$112_{-0.5}$ 32	120 170	145 37	3 130	75 37	Φ35H7 7.2	Φ50 18	38.3 $71_{-0.5}$	10 166	162 15	22 132	78 M12x30	Φ160	见附录 A-2 Please see appendix A-2
KAB57	Φ13.5 130	217 30	$132_{-0.5}$ 40	130 190	157 45	3 150	83 43	Φ40H7 13.1	Φ55 21	43.3 $80_{-0.5}$	12 173	172 18	29 142	86 M16x40	Φ160	
KAB67	Φ13.5 120	228 30	$140_{-0.5}$ 45	140 203	170 45	3.5 160	90 43	Φ40H7 20	Φ55 24	43.3 $90_{-0.5}$	12 179	170 20	29 156	93 M16x40	Φ160	
KAB77	Φ17.5 150	288 40	$180_{-0.5}$ 55	165 263	200 55	4 200	105 55	Φ50H7 31.3	Φ70 27	53.8 $112_{-0.5}$	14 202	208 22.5	32 183	108 M16x45	Φ200	
KAB87	Φ22 180	340 55	$212_{-0.5}$ 75	180 305	230 70	4 233	120 67	Φ60H7 25.9	Φ85 32	64.4 $132_{-0.5}$	18 257	260 30	36 210	123 M20x50	Φ250	
KAB97	Φ26 240	417 75	265_{-1} 60	240 372	290 75	4 295	150 82	Φ70H7 32.3	Φ95 36	74.9 $160_{-0.5}$	20 277	294 30	34 270	153 M20x50	Φ300	
KAB107	Φ33 280	503 95	315_{-1} 100	270 448	340 95	2.5 360	175 98	Φ90H7 52	Φ118 40	95.4 $200_{-0.5}$	25 341	380 40	40 313	178 M24x60	Φ350	

注:电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KAZ37-157
安装结构尺寸

KAZ37-157
Mounting Dimensional Description

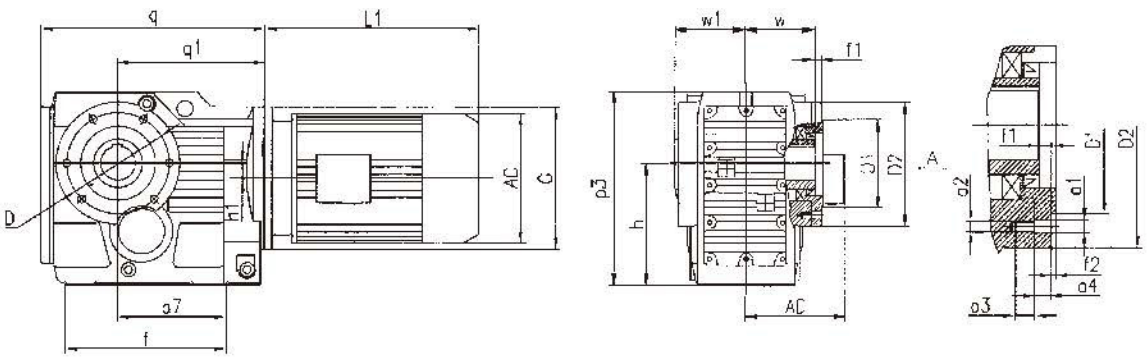

A向法兰安装结构尺寸 (Fig.A Mounting Dimension)

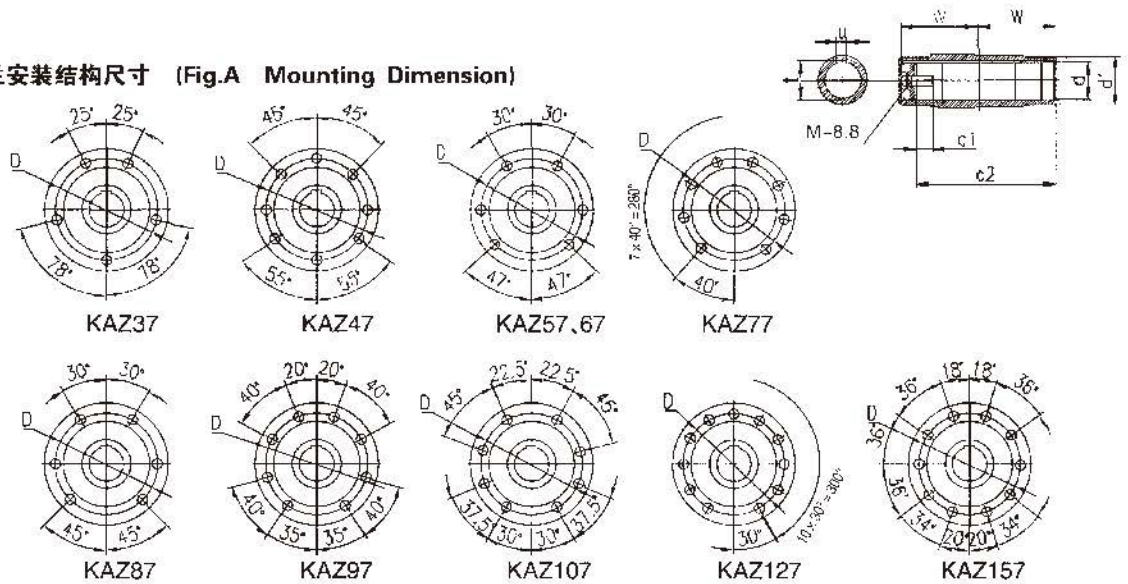


规格 Specification	q q_1	D_1 D_2	h h_1	p_3 a_7	f f_1	w w_1	d d_1	c_2 c_1	t u	a_3 a_4	f_2 a_2	a_1 D	G M	电机尺寸 Motor Size AC	AD	L1
KAZ37	210 139	Φ80j6 Φ110	$100_{-0.5}$ 8.5	164 97	147 9	60 63	Φ30H7 Φ45	105 17	33.3 8	12 11.5	3 M8	Φ9 Φ94	Φ120 M10x25			
KAZ47	243 166	Φ80j6 Φ120	$112_{-0.5}$ 7.2	185 115	170 8.5	75 78	Φ35H7 Φ50	132 22	38.3 10	12 11	3 M8	Φ9 Φ102	Φ160 M12x30			
KAZ57	269 173	Φ105j6 Φ155	$132_{-0.5}$ 13.1	215 120	182 9	83 86	Φ40H7 Φ55	142 29	43.3 12	20 12	3.5 M12	Φ13.5 Φ125	Φ160 M16x40			
KAZ67	274 179	Φ105j6 Φ155	$140_{-0.5}$ 20	226 125	182 8.5	90 94	Φ40H7 Φ55	156 29	43.3 12	20 12	3.5 M12	Φ13.5 Φ125	Φ160 M16x40			
KAZ77	312 202	Φ125j6 Φ170	$180_{-0.5}$ 31.3	286 139	204 10	105 108	Φ50H7 Φ70	183 32	53.8 14	20 14	3.5 M12	Φ13.5 Φ142	Φ200 M16x45	见附录 A-2 Please see appendix A-2		
KAZ87	390 257	Φ155j6 Φ215	$212_{-0.5}$ 25.9	338 190	280 11	120 123	Φ60H7 Φ85	210 36	64.4 18	26.15	4 M16	Φ17.5 Φ178	Φ250 M20x50			
KAZ97	435 277	Φ180j6 Φ260	$265_{-1.0}$ 32.3	414 190	298 14	150 153	Φ70H7 Φ95	270 34	74.9 20	26.18	4 M16	Φ17.5 Φ220	Φ300 M20x50			
KAZ107	537 341	Φ210j6 Φ304	$315_{-1.0}$ 52	500 230	370 -8	175 178	Φ90H7 Φ118	313 40	95.4 25	30 22	4 M20	Φ22 Φ260	Φ350 M24x60			
KAZ127	615 390	Φ250h6 Φ350	$375_{-1.0}$ 53	592 288	440 0	205 208	Φ100H7 Φ135	373 38	106.4 28	28 30	5 M20	Φ22 Φ300	Φ450 M24x60			
KAZ157	706 426	Φ290h6 Φ400	$450_{-1.0}$ 71.7	705 298	480 -14	250 253	Φ120H7 Φ155	460 36	127.4 32	36 28	5 M24	Φ26 Φ340	Φ550 M24x60			

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KH37-107
安装结构尺寸

KH37-107
Mounting Dimensional Description

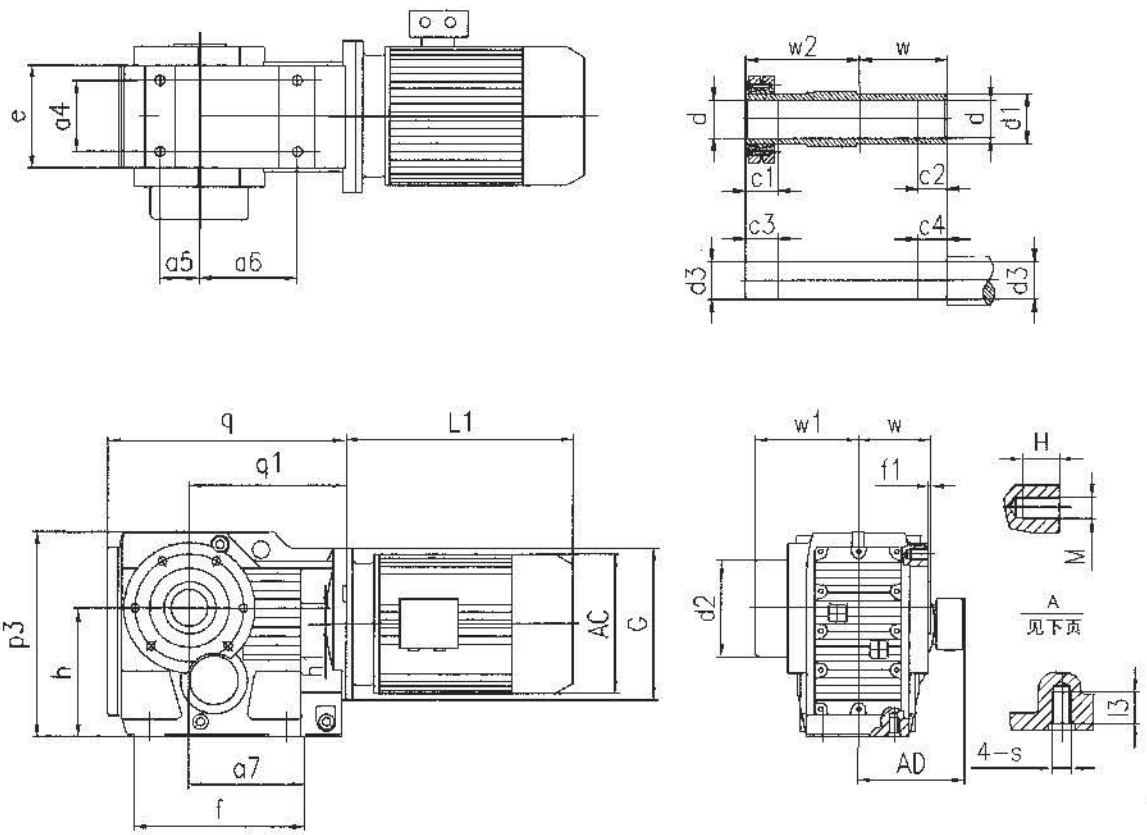


规格 Specification	q q_1	h h_1	e p_3	a_4 a_5	a_6 a_7	f f_1	d_2 d_1	d d_3	w w_1	w_2 G	c_1 c_2	c_3 c_4	s l_3	M H	电机尺寸 Motor Size AC	AD	L1
KH37	210 139	$100_{-0.5}$ 8.5	100 164	60 35	82 97	147 2.5	Φ75 Φ45	Φ30H7 Φ30h6	60 95	86 Φ120	31 20	36 25	M10 20	M8 12	见附录 A-2 Please see appendix A-2		
KH47	243 166	$112_{-0.5}$ 7.2	110 185	70 40	100 115	170 3	Φ83 Φ50	Φ35H7 Φ35h6	75 110	102 Φ160	32 20	37 25	M10 20	M8 12			
KH57	269 173	$132_{-0.5}$ 13.1	122 215	88 47	105 120	182 3	Φ83 Φ55	Φ40H7 Φ40h6	83 117	112 Φ160	26 20	31 25	M12 25	M12 20			
KH67	274 179	$140_{-0.5}$ 20	130 226	88 42	110 125	182 3.5	Φ93 Φ55	Φ40H7 Φ40h6	90 126	118 Φ160	38 20	43 25	M12 25	M12 20			
KH77	312 202	$180_{-0.5}$ 31.3	154 286	102 48	122 139	204 4	Φ114 Φ70	Φ50H7 Φ50h6	105 146	136 Φ200	36 30	41 35	M16 32	M12 20			
KH87	390 257	$212_{-0.5}$ 25.9	170 338	118 65	160 190	280 4	Φ159 Φ85	Φ65H7 Φ65h6	120 170	161 Φ250	41 40	46 45	M16 32	M16 26			
KH97	435 277	265_{-1} 32.3	226 414	160 83	165 190	298 4	Φ174 Φ95	Φ75H7 Φ75h6	150 206	195 Φ300	55 50	60 55	M20 36	M16 26			
KH107	537 341	315_{-1} 52	266 500	190 100	190 230	370 2.5	Φ200 Φ118	Φ95H7 Φ95h6	175 245	230 Φ350	65 60	75 70	M24 44	/ /			

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KH127-157
安装结构尺寸

KH127-157
Mounting Dimensional Description

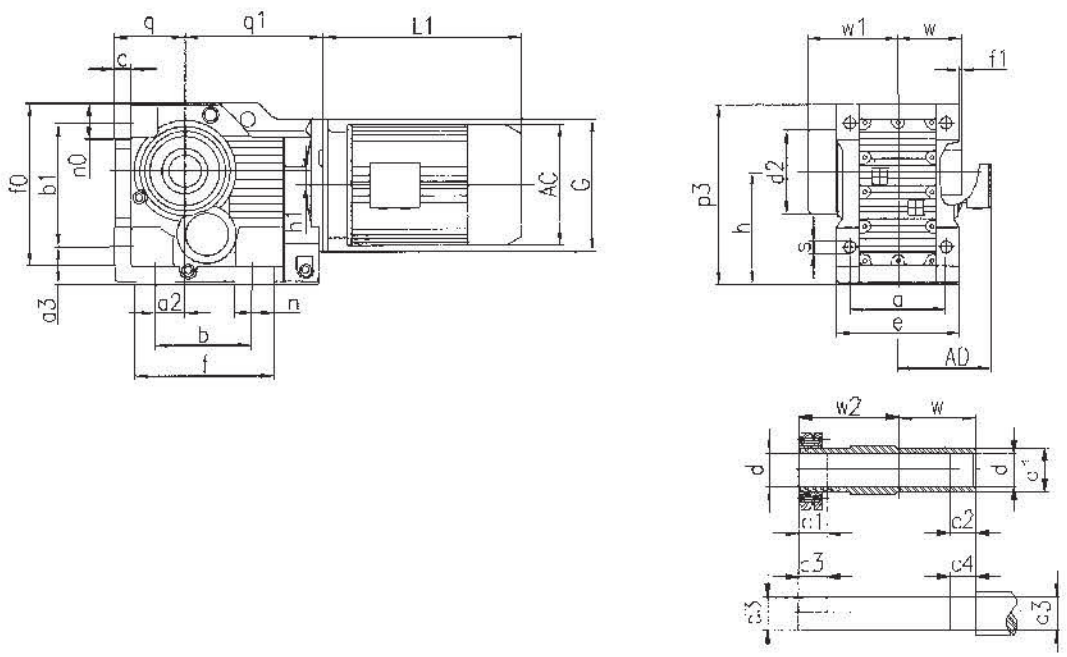


规格 Specification	q_1 q	c s	n_0 b_1	f_0 a_3	f n	a_2 b	h p_3	a e	w w_1	w_2 f_1	c_1 c_2	c_3 c_4	d_2 d_1	d d_3	h_1 G	电机尺寸 Motor Size AC	AD	L1
KH127	390 $225_{-0.5}$	45 Φ39	111 420	526 110	440 100	115 350	375_{-1} 592	330 400	205 296	280 2.5	85 70	95 80	Φ233 Φ135	Φ105H7 Φ105h6	53 Φ450	见附录 A-2 Please see appendix A-2		
KH157	426 280_{-1}	50 Φ39	130 500	634 130	480 100	140 380	450_{-1} 705	420 500	250 370	330 /	90 80	100 90	Φ315 Φ155	Φ125H7 Φ125h6	71.7 Φ550			

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

A向法兰安装结构尺寸 (Fig.A Mounting Dimension)

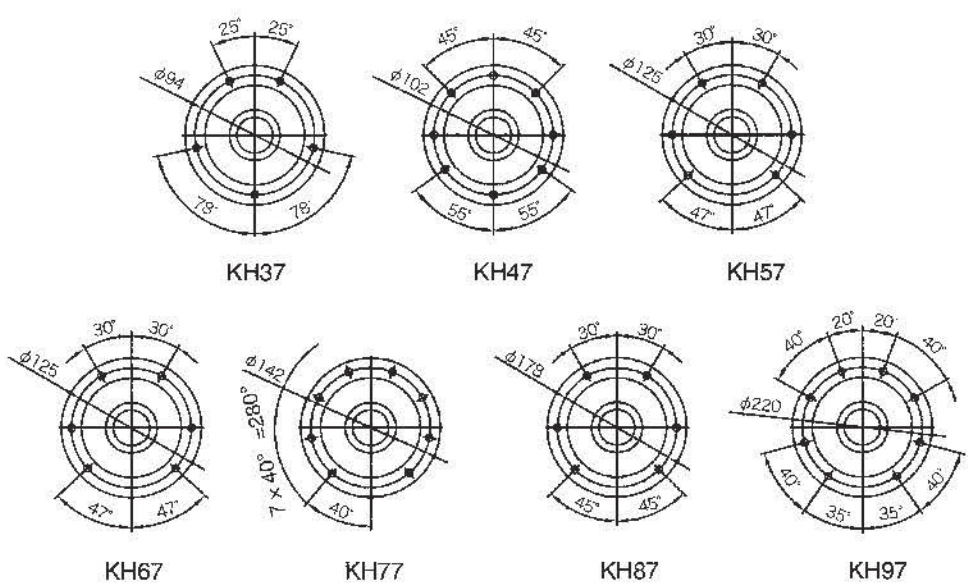

KH167-187
安装结构尺寸

KH167-187
Mounting Dimensional Description

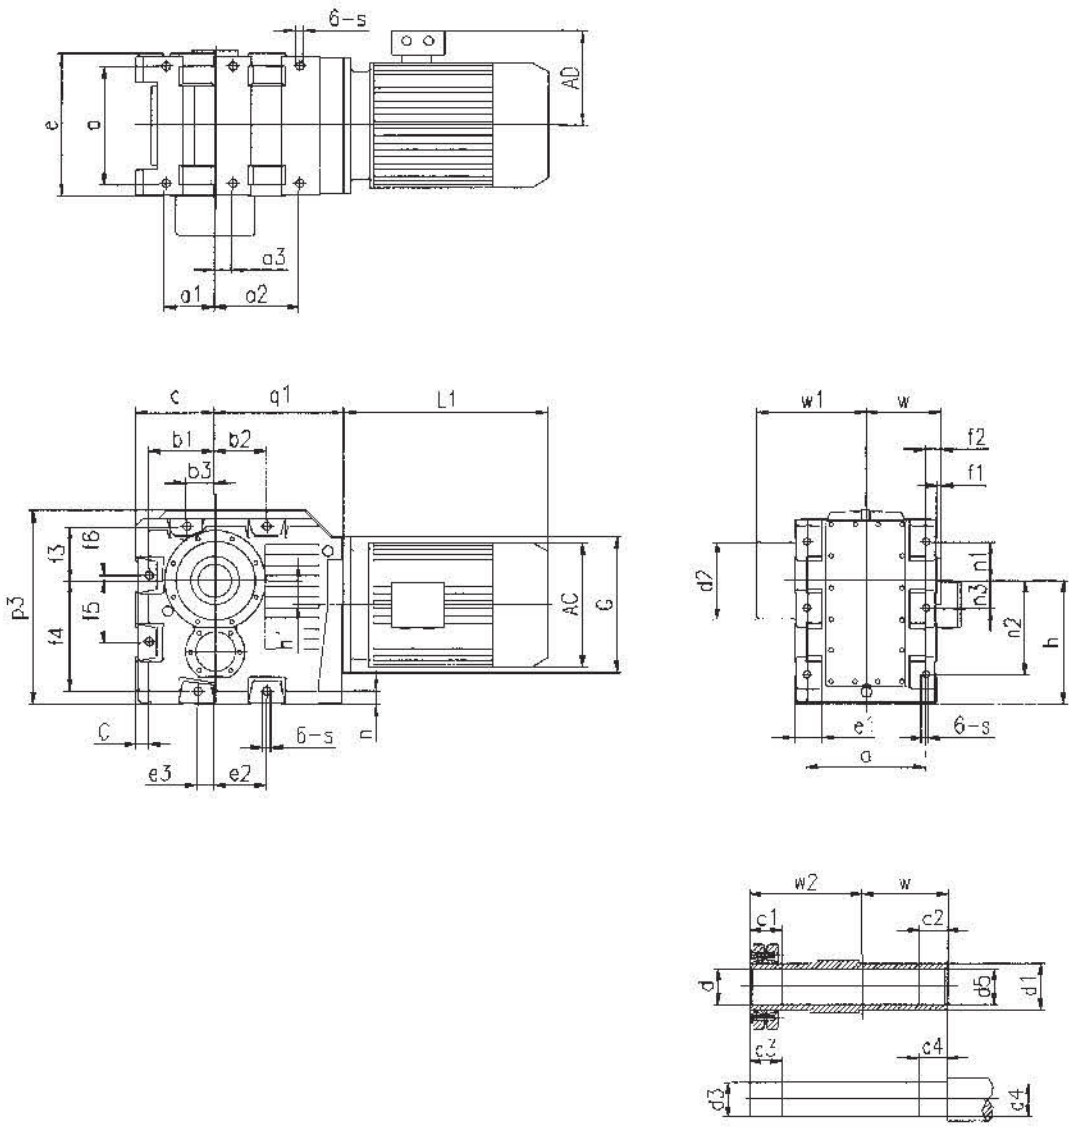


规格 Specification	a_1 a_2 a_3	p_3 q q_1	b_1 b_2 b_3	f_3 f_4 f_6	f_8 h_1 n	e_2 e_3 c	a f_2 f_1	h n_1 n_2	n_3 e e_1	c_1 c_2 c_3	c_4 w w_1	w_2 s d_2	d d_5 d_3	d_4 d_1 G	电机尺寸 Motor Size AC	AD	L1
KH167	200 340 70	786 315-1 522	265 210 115	220 450 250	22 97 50	210 70 50	480 65 9	500-1 155 385	115 580 104	122 90 130	100 305 442	423 Φ33 Φ315	Φ135H7 Φ140H7 Φ135h6	Φ140h6 Φ180 Φ550	见附录 A-2 Please see appendix A-2		
KH187	215 405 95	942 355-1 582	305 250 135	250 550 305	5 112 50	250 60 50	540 67 10.5	600-1 160 460	150 640 110	117 95 130	105 337 474	455 Φ39 Φ373	Φ155H7 Φ160H7 Φ155h6	Φ160h6 Φ200 Φ550			


注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KHB47-107
安装结构尺寸

KHB47-107
Mounting Dimensional Description

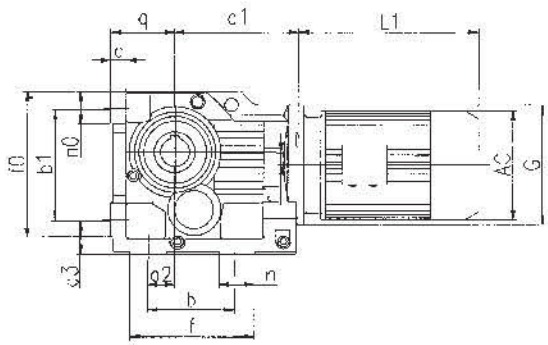






规格 Specification	q q_1	s b	p_3 a_2	h n	a b_1	e a_3	f_0 f_1	w n_0	d d_3	c h_1	d_1 d_2	f f_2	c_1 c_2	c_3 c_4	w_1 w_2	G	电机尺寸 Motor Size		
																	AC	AD	L1
KHB47	$71_{-0.5}$ 166	Φ 11 130	185 35	$112_{-0.5}$ 32	120 130	145 37	170 3	75 37	Φ 35H7 Φ 35h6	18 7.2	Φ 50 Φ 83	162 15	32 20	37 25	110 102	Φ 160	见附录 A-2 Please see appendix A-2		
KHB57	$80_{-0.5}$ 173	Φ 13.5 130	217 30	$132_{-0.5}$ 40	130 150	157 45	190 3	83 43	Φ 40H7 Φ 40h6	21 13.1	Φ 55 Φ 83	172 18	26 20	31 25	117 112	Φ 160			
KHB67	$90_{-0.5}$ 179	Φ 13.5 120	228 30	$140_{-0.5}$ 45	140 160	170 45	203 3.5	90 43	Φ 40H7 Φ 40h6	24 20	Φ 55 Φ 93	170 20	38 20	43 25	126 118	Φ 160			
KHB77	$112_{-0.5}$ 202	Φ 17.5 150	288 40	$180_{-0.5}$ 55	165 200	200 55	263 4	105 55	Φ 50H7 Φ 50h6	27 31.3	Φ 70 Φ 114	208 22.5	36 30	41 35	146 136	Φ 200			
KHB87	$132_{-0.5}$ 257	Φ 22 180	340 55	$212_{-0.5}$ 75	180 233	230 70	305 4	120 67	Φ 65H7 Φ 65h6	32 25.9	Φ 85 Φ 159	260 30	41 40	46 45	170 161	Φ 250			
KHB97	$160_{-0.5}$ 277	Φ 26 240	417 75	265_{-1} 60	240 295	290 75	372 4	150 82	Φ 75H7 Φ 75h6	36 32.3	Φ 95 Φ 174	294 30	55 50	60 55	206 195	Φ 300			
KHB107	$200_{-0.5}$ 341	Φ 33 280	503 95	315_{-1} 100	270 360	340 95	448 2.5	175 98	Φ 95H7 Φ 95h6	40 52	Φ 118 Φ 200	380 40	65 60	75 70	245 230	Φ 350			


注:电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KHF37-157
安装结构尺寸


KHF37-157
Mounting Dimensional Description

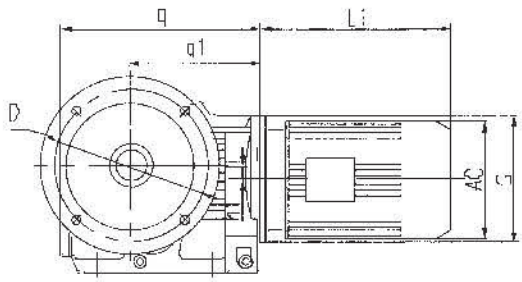

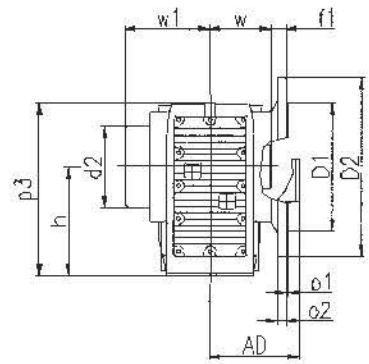




KHF37–87



KHF97–157




规格 Specification	q q_1	h h_1	o_1 o_2	s f_1	w_1 w	w_2 c_1	c_2 c_3	c_4 D	D_1 D_2	d_1 d_3	d d_2	p_3 G	电机尺寸 Motor Size AC / AD / L1
KHF37	210 139	$100_{-0.5}$ 8.5	3.5 10	Φ9 24	95 60	86 31	20 36	25 Φ130	Φ110j6 Φ160	Φ45 Φ30h6	Φ30H7 Φ75	164 Φ120	见附录 A-2 Please see appendix A-2
KHF47	243 166	$112_{-0.5}$ 7.2	3.5 10	Φ11 25	110 75	102 32	20 37	25 Φ165	Φ130j6 Φ200	Φ50 Φ35h6	Φ35H7 Φ83	185 Φ160	
KHF57	269 173	$132_{-0.5}$ 13.1	4 15	Φ13.5 23.5	117 83	112 26	20 31	25 Φ215	Φ180j6 Φ250	Φ55 Φ40h6	Φ40H7 Φ83	215 Φ160	
KHF67	274 179	$140_{-0.5}$ 20	4 15	Φ13.5 23	126 90	118 38	20 43	25 Φ215	Φ180j6 Φ250	Φ55 Φ40h6	Φ40H7 Φ93	226 Φ160	
KHF77	312 202	$180_{-0.5}$ 31.3	4 16	Φ13.5 37	146 105	136 36	30 41	35 Φ265	Φ230j6 Φ300	Φ70 Φ50h6	Φ50H7 Φ114	286 Φ200	
KHF87	390 257	$212_{-0.5}$ 25.9	5 18	Φ17.5 30	170 120	161 41	40 46	45 Φ300	Φ250h6 Φ350	Φ85 Φ65h6	Φ65H7 Φ159	338 Φ250	
KHF97	435 277	265_{-1} 32.3	5 22	Φ17.5 41.5	206 150	195 55	50 60	55 Φ400	Φ350h6 Φ450	Φ95 Φ75h6	Φ75H7 Φ174	414 Φ300	
KHF107	537 341	315_{-1} 52	5 22	Φ17.5 41	245 175	230 65	60 75	70 Φ400	Φ350h6 Φ450	Φ118 Φ95h6	Φ95H7 Φ200	500 Φ350	
KHF127	615 390	375_{-1} 53	5 25	Φ17.5 51	296 205	280 85	70 95	80 Φ500	Φ450h6 Φ550	Φ135 Φ105h6	Φ105H7 Φ233	592 Φ450	
KHF157	706 426	450_{-1} 71.7	6 28	Φ22 60	370 250	330 90	80 100	90 Φ600	Φ550h6 Φ660	Φ155 Φ125h6	Φ125H7 Φ315	705 Φ550	

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)


Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)

KHZ37-157
安装结构尺寸

KHZ37-157
Mounting Dimensional Description

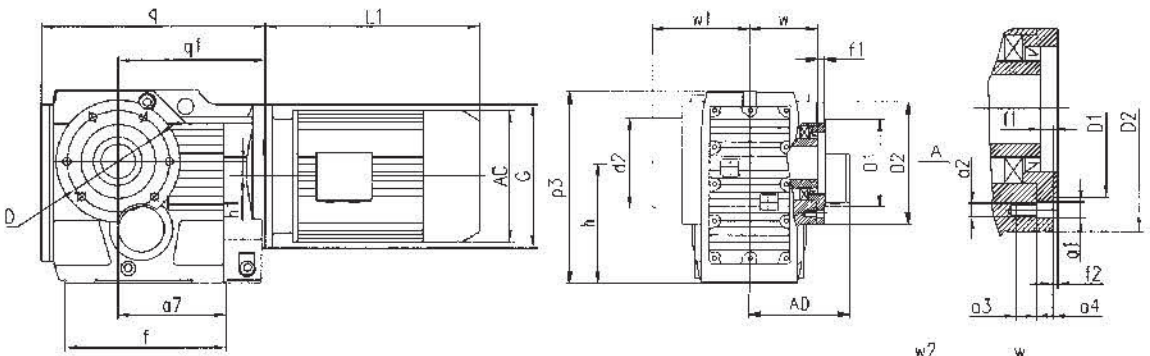

A向法兰安装结构尺寸 (Fig.A Mounting Dimension)

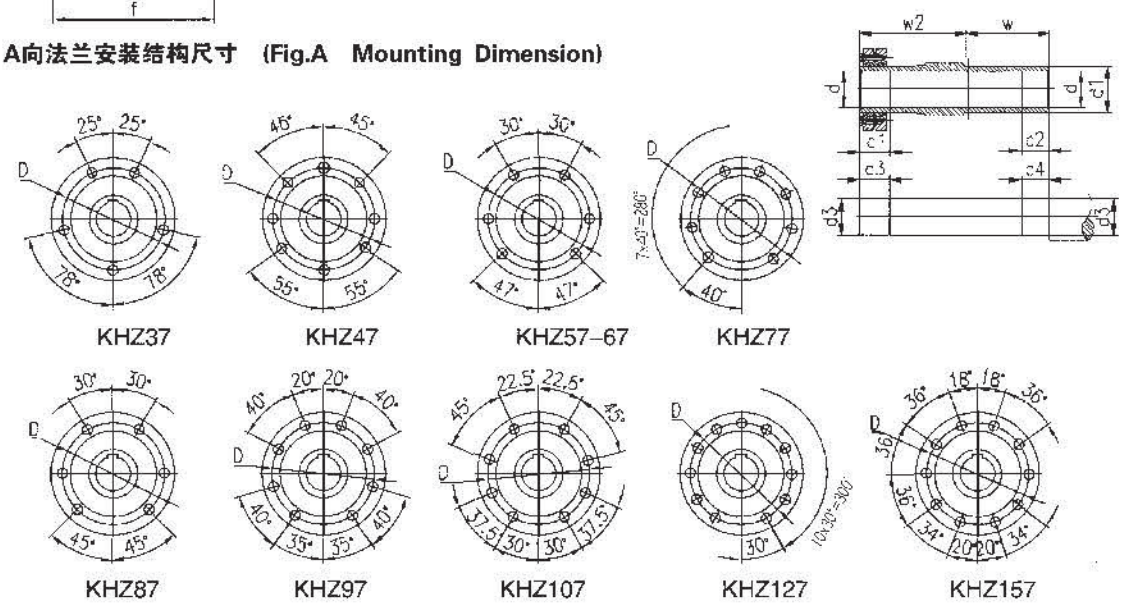


规格 Specification	q q_1	D_1 D_2	h h_1	p_3 a_7	f f_1	w w_1	G w_2	d_2 d_1	d d_3	c_1 c_2	c_3 c_4	a_3 a_4	f_2 a_2	a_1 D	电机尺寸 Motor Size AC	 AD	 L1
KHZ37	210 139	Φ 80j6 Φ 110	$100_{-0.5}$ 8.5	164 97	147 9	60 95	Φ 120 86	Φ 75 Φ 45	Φ 30H7 Φ 30h6	31 20	36 25	12 11.5	3 M8	Φ 9 Φ 94	见附录 A-2 Please see appendix A-2		
KHZ47	243 166	Φ 80j6 Φ 120	$112_{-0.5}$ 7.2	185 115	170 8	75 110	Φ 160 102	Φ 83 Φ 50	Φ 35H7 Φ 35h6	32 20	37 25	12 11	3 M8	Φ 9 Φ 102			
KHZ57	269 173	Φ 105j6 Φ 155	$132_{-0.5}$ 13.1	215 120	182 9	83 117	Φ 160 112	Φ 83 Φ 55	Φ 40H7 Φ 40h6	26 20	31 25	20 12	3.5 M12	Φ 13.5 Φ 125			
KHZ67	274 179	Φ 105j6 Φ 155	$140_{-0.5}$ 20	226 125	182 8.5	90 126	Φ 160 118	Φ 93 Φ 55	Φ 40H7 Φ 40h6	38 20	43 25	20 12	3.5 M12	Φ 13.5 Φ 125			
KHZ77	312 202	Φ 125j6 Φ 170	$180_{-0.5}$ 31.3	286 139	204 10	105 146	Φ 200 136	Φ 114 Φ 70	Φ 50H7 Φ 50h6	36 30	41 35	20 14	3.5 M12	Φ 13.5 Φ 142			
KHZ87	390 257	Φ 155j6 Φ 215	$212_{-0.5}$ 25.9	338 190	280 11	120 170	Φ 250 161	Φ 159 Φ 85	Φ 65H7 Φ 65h6	41 40	46 45	26 15	4 M16	Φ 17.5 Φ 178			
KHZ97	435 277	Φ 180j6 Φ 260	265_{-1} 32.3	414 190	298 14	150 206	Φ 300 195	Φ 174 Φ 95	Φ 75H7 Φ 75h6	55 50	60 55	26 18	4 M16	Φ 17.5 Φ 220			
KHZ107	537 341	Φ 210j6 Φ 304	315_{-1} 52	500 230	370 8	175 245	Φ 350 230	Φ 200 Φ 118	Φ 95H7 Φ 95h6	65 60	75 70	30 22	4 M20	Φ 22 Φ 260			
KHZ127	615 390	Φ 250h6 Φ 350	375_{-1} 53	592 288	440 0	205 296	Φ 450 280	Φ 233 Φ 135	Φ 105H7 Φ 105h6	85 70	95 80	28 30	5 M20	Φ 22 Φ 300			
KHZ157	706 426	Φ 290h6 Φ 400	450_{-1} 71.7	705 298	480 14	250 370	Φ 550 330	Φ 315 Φ 155	Φ 125H7 Φ 125h6	90 80	100 90	36 28	5 M24	Φ 26 Φ 340			

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)


KAT37-157
安装结构尺寸

KAT37-157
Mounting Dimensional Description

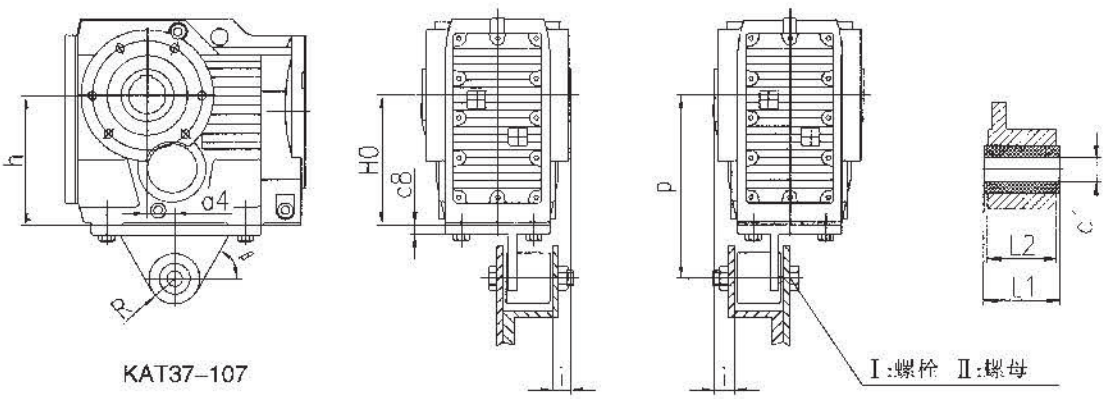

KAT37–107

C面安装　　D面安装

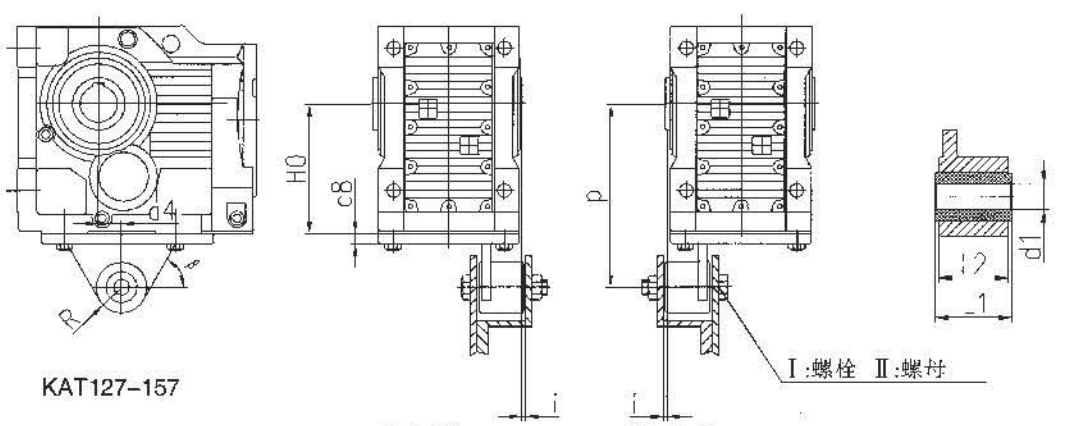

KAT127–157

C面安装　　D面安装

机型号 Type Size	a_4	β	C_8	i	P	R	H_0	d_1	$L_{1-0.3}^{0}$	L_2
KAT37	23.5	60°	10	20	$140^{+0.2}_{-0.7}$	22.5	$100_{-0.5}$	$10.4^{+0.1}_{-0.1}$	36	31
KAT47	30	55°	12	20	$160^{+0.2}_{-0.7}$	22.5	$112_{-0.5}$	$10.4^{+0.1}_{-0.1}$	36	31
KAT57	40	55°	13	18	$192^{+0.2}_{-0.7}$	29	$132_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KAT67	45	55°	13	25	$200^{+0.2}_{-0.7}$	29	$140_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KAT77	52.5	60°	14	25	$250^{+0.2}_{-0.7}$	29	$180_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KAT87	60	60°	16	30	$300^{+0.2}_{-0.7}$	41	$212_{-0.5}$	$25^{+0.08}_{-0.08}$	80	72
KAT97	70	50°	17	40	$350^{+0.2}_{-1.2}$	41	265_{-1}	$25^{+0.08}_{-0.08}$	100	92
KAT107	74	55°	20	45	$450^{+0.5}_{-1.5}$	41	315_{-1}	$25^{+0.08}_{-0.08}$	100	92
KAT127	60	65°	45	7	$550^{+0.5}_{-1.5}$	70	375_{-1}	$40^{+0.08}_{-0.08}$	126	110
KAT157	50	65°	45	2	$700^{+0.5}_{-1.5}$	70	450_{-1}	$40^{+0.08}_{-0.08}$	126	110

其它尺寸请按照 KA 型。


注：I：螺栓 II：螺母用户自配。

For other dimensions, see the type KA.

Note: bolts I and nuts II are prepared by customers.


KHT37-157
安装结构尺寸

KHT37-157
Mounting Dimensional Description

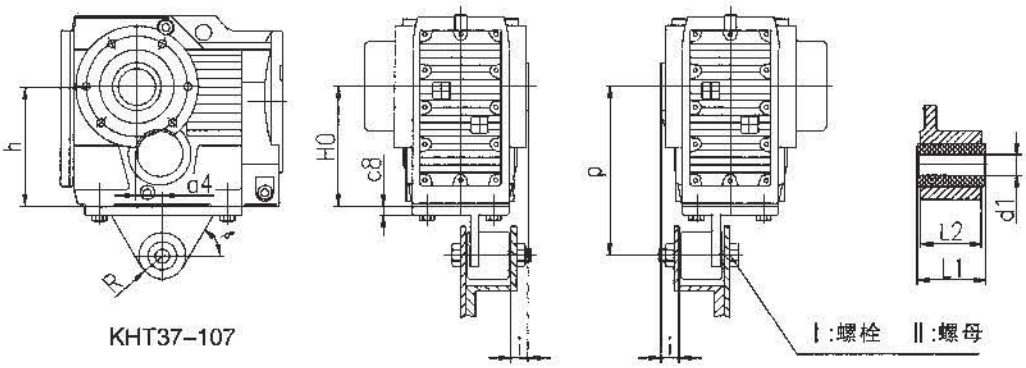

KHT37–107

C面安装　　D面安装

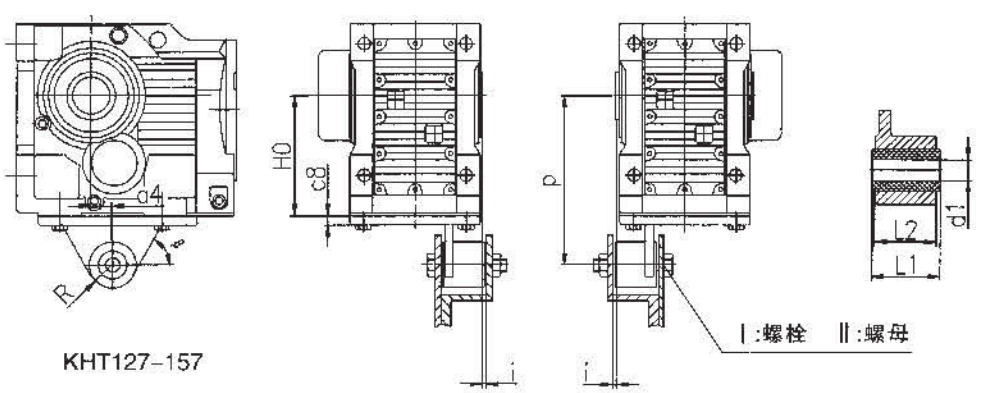

KHT127–157

C面安装　　D面安装

机型号 Type Size	a_4	β	C_8	i	P	R	H_0	d_1	$L_{1-0.3}^{0}$	L_2
KHT37	23.5	60°	10	20	$140^{+0.2}_{-0.7}$	22.5	$100_{-0.5}$	$10.4^{+0.1}_{-0.1}$	36	31
KHT47	30	55°	12	20	$160^{+0.2}_{-0.7}$	22.5	$112_{-0.5}$	$10.4^{+0.1}_{-0.1}$	36	31
KHT57	40	55°	13	18	$192^{+0.2}_{-0.7}$	29	$132_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KHT67	45	55°	13	25	$200^{+0.2}_{-0.7}$	29	$140_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KHT77	52.5	60°	14	25	$250^{+0.2}_{-0.7}$	29	$180_{-0.5}$	$16.4^{+0.08}_{-0.08}$	60	54
KHT87	60	60°	16	30	$300^{+0.2}_{-0.7}$	41	$212_{-0.5}$	$25^{+0.08}_{-0.08}$	80	72
KHT97	70	50°	17	40	$350^{+0.2}_{-0.7}$	41	265_{-1}	$25^{+0.08}_{-0.08}$	100	92
KHT107	74	55°	20	45	$450^{+0.5}_{-1.5}$	41	315_{-1}	$25^{+0.08}_{-0.08}$	100	92
KHT127	60	65°	45	7	$550^{+0.5}_{-1.5}$	70	375_{-1}	$40^{+0.08}_{-0.08}$	126	110
KHT157	50	65°	45	2	$700^{+0.5}_{-1.5}$	70	450_{-1}	$40^{+0.08}_{-0.08}$	126	110

其它尺寸请按照 KII 型。


注:I:螺栓 II:螺母用户自配。

For other dimensions, see the type KH.

Note: bolts I and nuts II are prepared by customers.

K . . SZ37-187AD1-8
安装结构尺寸

K . . SZ37-187AD1-8
Mounting Dimensional Description

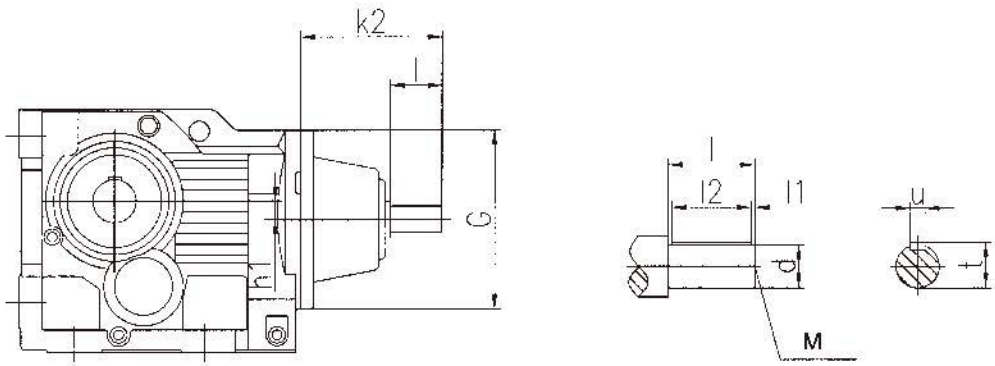

K . . SZ37-187AD1-8 安装结构尺寸 （ K..SZ37-187AD1-8 Mounting Dimensional Description)

机型号 Type Size		d	G	k_2	l	M	l_1	l_2	t	u	h_1
K..SZ37	AD1	16k6	Φ120	115	40	M5	4	32	18	5	8.5
	AD2	19k6	Φ120	115	40	M6	4	32	21.5	6	8.5
K..SZ47	AD2	19k6	Φ160	120	40	M6	4	32	21.5	6	7.2
	AD3	24k6	Φ160	130	50	M8	5	40	27	8	7.2
K..SZ57/67	AD2	19k6	Φ160	120	40	M6	4	32	21.5	6	13.1/20
	AD3	24k6	Φ160	130	50	M8	5	40	27	8	13.1/20
K..SZ77	AD2	19k6	Φ200	130	40	M6	4	32	21.5	6	31.3
	AD3	24k6	Φ200	140	50	M8	5	40	27	8	31.3
	AD4	38k6	Φ200	140	50	M12	5	40	41	10	31.3
K..SZ87	AD2	19k6	Φ250	160	40	M6	4	32	21.5	6	25.9
	AD3	28k6	Φ250	180	60	M10	5	50	31	8	25.9
	AD4	38k6	Φ250	200	80	M12	5	70	41	10	25.9
	AD5	42k6	Φ250	200	80	M16	5	70	45	12	25.9
K..SZ97	AD3	28k6	Φ300	200	60	M10	5	50	31	8	32.3
	AD4	38k6	Φ300	220	80	M12	5	70	41	10	32.3
	AD5	42k6	Φ300	220	80	M16	5	70	45	12	32.3
	AD6	48k6	Φ300	220	80	M16	5	70	51.5	14	32.3
K..SZ107	AD3	28k6	Φ350	220	60	M10	5	50	31	8	52
	AD4	38k6	Φ350	240	80	M12	5	70	41	10	52
	AD5	42k6	Φ350	270	110	M16	10	90	45	12	52
	AD6	48k6	Φ350	270	110	M16	10	90	51.5	14	52
K..SZ127	AD4	38k6	Φ450	267	80	M12	5	70	41	10	53
	AD5	42k6	Φ450	297	110	M16	10	90	45	12	53
	AD6	48k6	Φ450	297	110	M16	10	90	51.5	14	53
	AD7	55m6	Φ450	297	110	M20	10	90	59	16	53
	AD8	70m6	Φ450	297	110	M20	10	90	74.5	20	53
K..SZ157/167/187	AD5	42k6	Φ550	344	110	M16	10	90	45	12	71.7/97/112
	AD6	48k6	Φ550	344	110	M16	10	90	51.5	14	71.7/97/112
	AD7	55m6	Φ550	344	110	M20	10	90	59	16	71.7/97/112
	AD8	70m6	Φ550	374	140	M20	15	110	74.5	20	71.7/97/112

其它尺寸请参照 K 型。


注：KF/ KA/ KAB/ KAF/ KAZ/ KH/ KHF/ KHZ 也均可采用双轴型，并分别记为 KFSZ..AD..、KASZ..AD..、KABSZ..AD..、KAFSZ..AD..、KAZSZ..AD..、KHSZ..AD.. 、KHFSZ..AD..和 KHZSZ..AD..。

For other dimensions, see the type K.

Note: double shafts type is also available for type KF/ KA/ KAB/ KAF/ KAZ/ KH/ KHF/ KHZ, and these double shafts types are respectively named type KHFSZ..AD..、KASZ..AD..、KABSZ..AD..、KAFSZ..AD..、KAZ..AD..、KHSZ..AD..、 KHFSZ..AD...and KHZSZ..AD...

K..R..
安装结构尺寸

K..R..
Mounting Dimensional Description

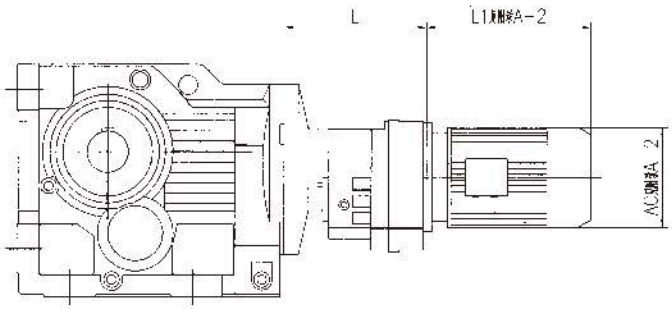

机型号 Type Size	电机机座号 Motor frame size	L
K..37R17	63	131
	71	
	80	
K..47R37 K..67R37	63	157
	71	
	80	
K..57R37	63	157
	71	
	80	
	90	
K..77R37	63	157
	71	
	80	
	90	
K..87R57	63	187
	71	
	80	
	90	
	100	
K..97R57	63	187
	71	
	80	
	90	
	100	
	112	
K..107R77	63	220
	71	
	80	
	90	
	100	
	112	
	132	
	160	

机型号 Type Size	电机机座号 Motor frame size	L
K..127R77	63	220
	71	
	80	
	90	
	100	
	112	
	132	
	160	
K..127R87	90	272
	100	
	112	
	132	
	160	
	180	
K..157R97 K..167R97 K..187R97	80	320
	90	
	100	
	112	
	132	
	160	
	180	
	200	
K..157R107 K..167R107 K..187R107	100	355
	112	
	132	
	160	
	180	
	200	
	225	

注：KA/ KAF/ KF/ KAZ/ KH/ KHF/ KHZ 均可采用串联组合机型

Note: Combined type is also available for type KA/ KAF/ KF/ KAZ/ KH/ KHF/ KHZ.

注：电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)